


Business Processes Modelling

MPB (6 cfu, 295AA)


Roberto Bruni

<http://www.di.unipi.it/~bruni>

03 - Visual notation

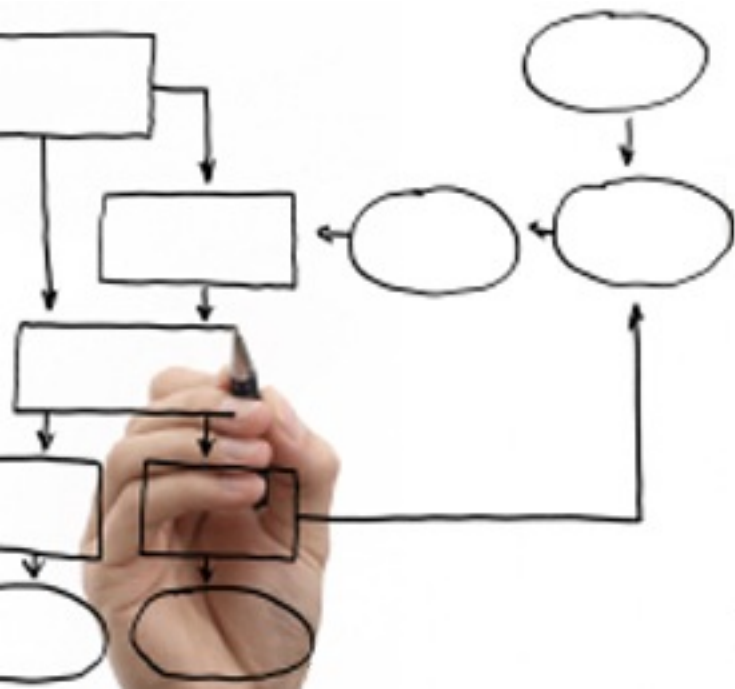

Objective

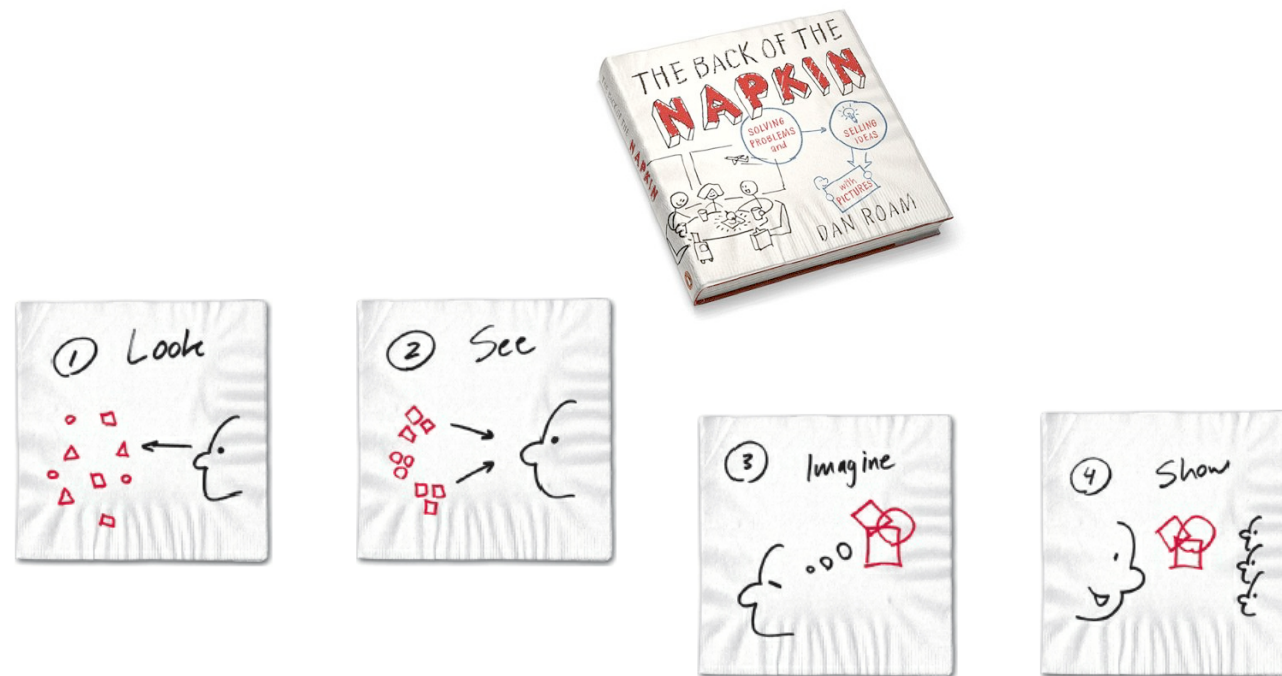

To lay the foundation of business process modelling through graphical approaches

Ch. 3 of Business Process Management: Concepts, Languages, Architectures

Business process

Definition: a **business process** consists of a set of activities that are performed in coordination in an organizational and technical environment. These activities jointly realize a business goal.

Orchestration

Each business process is enacted by a single organization, but it may interact with business processes performed by other organizations.

Collaboration / Choreography

- Weske



Business process models and instances

Definition: **business process model** consists of a set of activity models and execution constraints between them.

- Weske

Definition: **business process instance** represents a concrete case in the operational business of a company, consisting of activity instances.

- Weske

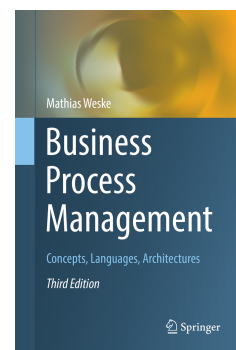

Models and instances

Each activity model acts as a blueprint
for a set of activity instances

Each business process model
acts as a blueprint for a set of
business process instances
(related to cases)



Enter
credit
request

Enter c.r.
(r017, Miller,
10000)

Enter c.r.
(r018, Brown,
15500)

Enter c.r.
(r019, McGraf,
12000)



If no confusion is possible, the term **activity** is
used to refer to activity models (tasks)
as well as activity instances

Analogously, the term **process** is used to refer
to process models as well as process instances

Modelling:

Who is the customer?

Each business process starts and ends with a customer who requests a product and who receives the product as a result of the business process

a customer can be internal to the company,
e.g. a department



Modelling:

Who is the owner?

Each business process is assigned a process owner, who is responsible for the process


the owner is in charge of making sure
that process instances are conducted correctly,
that business goals are met, and
that process performances are measured and improved



Modelling: Which tasks?

*Each business process comprises
a set of activities needed to realize the business goals*


tasks can be expressed at different levels of granularity
(each unit of work is seen as an atomic action, possibly
with a duration and a cost)

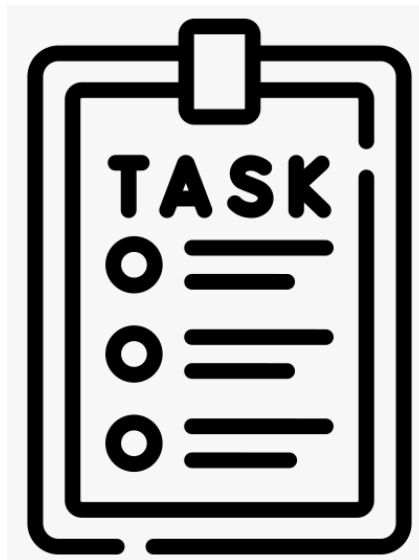

Modelling: Which dependencies?

Execution constraints are used to order activities in a way that enterprise resources are used efficiently and at the same time the business goals are met


process orchestration languages are used to express execution constraints about distribution over *time*

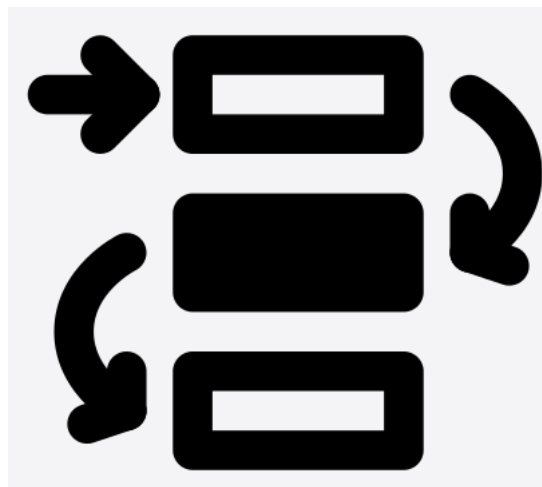

Modelling: Which roles?

*Each task may need some specific abilities (roles)
to be carried out*

process orchestration languages are used to express
execution constraints about distribution over *space*

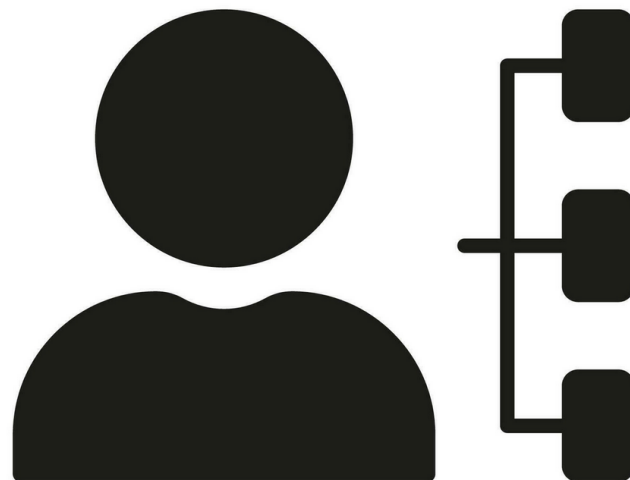


Modelling

From informal textual descriptions (requirements)
to a particular business process modelling notation

Explicit business process models expressed in a
graphical notation facilitate communication, so that
different stakeholders can:

communicate efficiently
refine processes
improve processes

No	Requirement	Use Case
1	To locate user's current location	Current Location
2	To display user's current location information	Display Current Location
3	To display error when couldn't locate location	Error Displaying Locations
4	To provide a search function for user to search for direction to another location	Search Direction
5	To display user's desired location direction	Display Direction
6	To provide user the floor plans of the building	Floor Layout
7	To provide the list of floor layout for user to select	Select Floor
8	To display the selected floor layout by the user	Display Floor Layout
9	To provide user all the stores information in the building	Store List
10	To provide the list of store categories for user to select	Select Category
11	To display the list of stores under the selected	Select Store
12	To display the selected store information	Display Store Information
13	To display the first interface of	Home

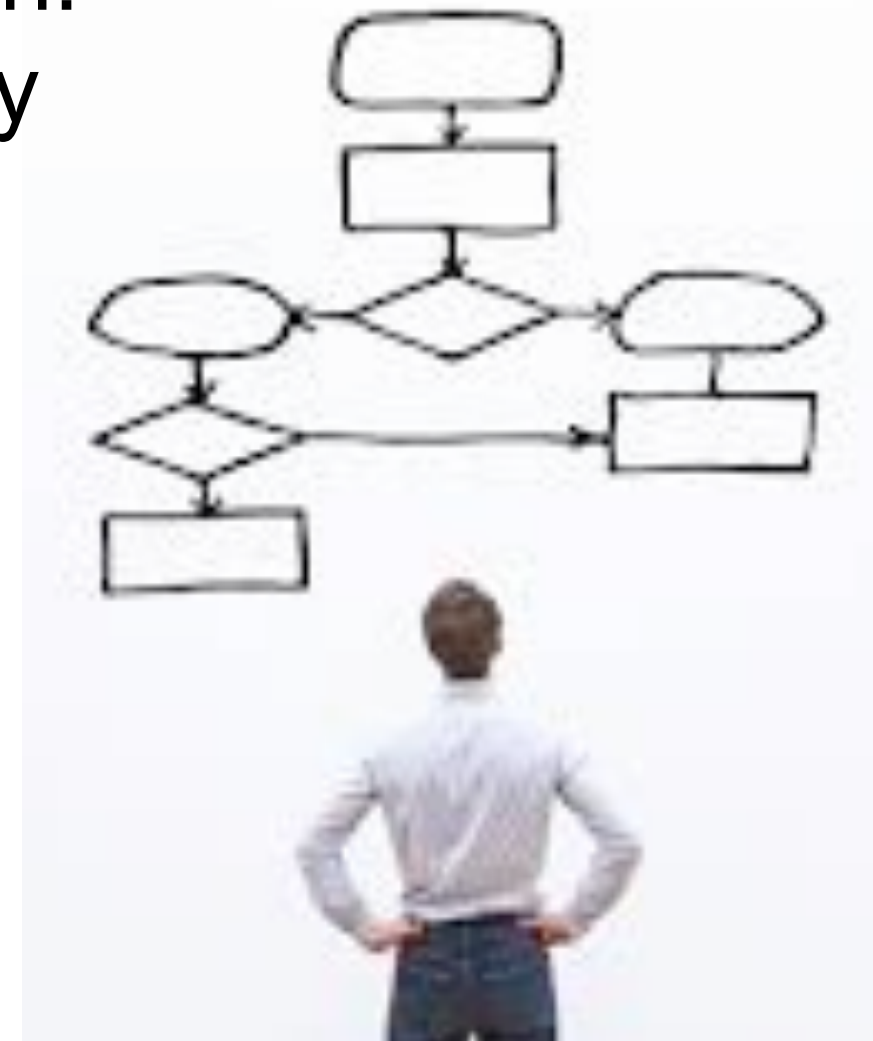

Business process management


Definition: **business process management**

includes concepts, methods, and techniques to support the design, administration, configuration, enactment, and analysis of business processes.

- *Weske*

We need **explicit representation** of business processes, their **tasks** and the **execution constraints** between them


Business processes can then be subject to **analysis, improvement, and enactment**



Business process management system

Business process models are the main artefact for implementing business processes

This implementation can be done by organizational rules and policies, but it can also be done by business process management (software) system



Definition: business process management system is a generic software system that is driven by explicit process representations to coordinate the enactment of business processes.


- Weske

Representing processes


Visual representations:

diagrams and charts
understandable by humans

(informal, intuitive, BPMN, EPC, BPEL)



what we see

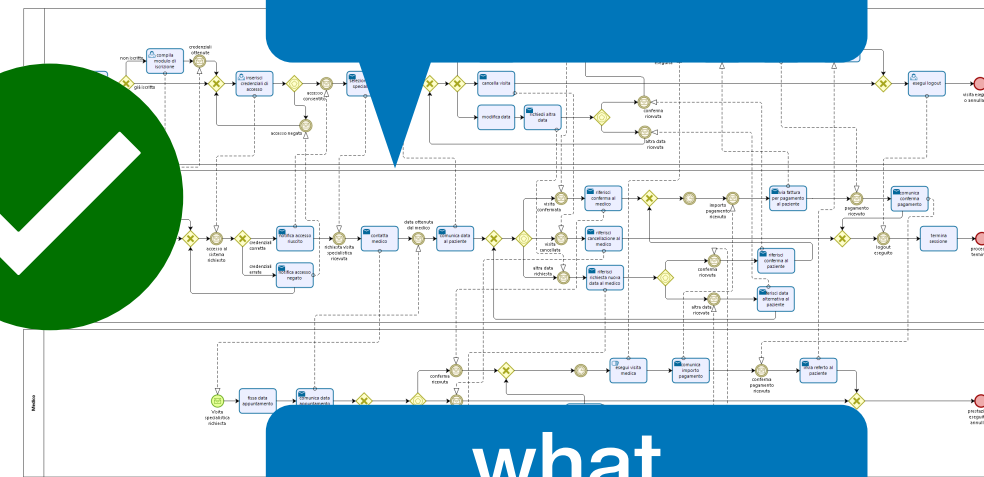


what machines see

Languages:

unambiguous machine syntax

(process dialects, XML schemes)




```
1 <?xml version="1.0"?>
2   xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/
   -instance" id="_2019_1207470" targetNamespace="http://www.bizagi.com/
   9011207470" xmlns="http://www.omg.org/spec/BPMN/20100524/MODEL">
   _4184d428-51f4-4a5f-a66c-4b24ae1da1b3" name="Processo principale">
   n />
   Id_b106ba3a-1bbb-4efd-bece-dc9cda12eeeb" />
   Id_15079acc-09ed-4adf-b44f-1578d60b82a8">
   tion />
   id="Id_ebce1c69-4d72-45f6-8b3e-2367442967ab" />
10   <intermediateCatchEvent id="Id_254c9cde-6b8c-42be-a151-55ed4e87b322" name="conferma
   ricevuta">
```


Models:

rigorous semantics for scientists

(automata, Petri nets, workflow nets)



what we
analyse

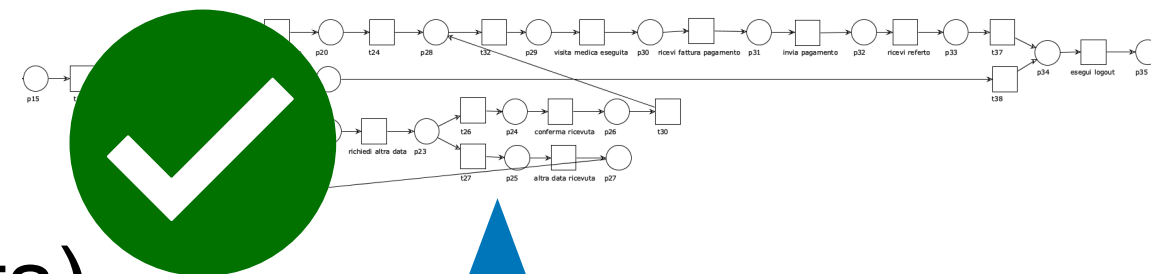

Do you know XML?

eXtensible Markup Language:
file format for storing and transmitting data

XML tags represent the data structure and contain metadata

```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<note>
```

```
  <from>Alice</from>
```

```
  <to>Bob</to>
```

```
  <heading>Reminder</heading>
```

```
  <body>Don't forget to buy oranges!</body>
```

```
</note>
```

BPMN vs .bpmn



```
<?xml version="1.0" encoding="UTF-8"?>
<bpmn:process id="Process_0pjif87">
  <bpmn:startEvent id="StartEvent_1">
    <bpmn:outgoing>Flow_0u05dpy</bpmn:outgoing>
  </bpmn:startEvent>
  <bpmn:task id="Activity_11zhm01" name="Run">
    <bpmn:incoming>Flow_0u05dpy</bpmn:incoming>
    <bpmn:outgoing>Flow_17t5zjm</bpmn:outgoing>
  </bpmn:task>
  <bpmn:sequenceFlow id="Flow_0u05dpy" sourceRef="StartEvent_1" targetRef="Activity_11zhm01" />
  <bpmn:endEvent id="Event_1t0u7im">
    <bpmn:incoming>Flow_17t5zjm</bpmn:incoming>
  </bpmn:endEvent>
  <bpmn:sequenceFlow id="Flow_17t5zjm" sourceRef="Activity_11zhm01" targetRef="Event_1t0u7im" />
</bpmn:process>
</note>
```

Insurance claim example (simplified)


Sect.1.3 of Workflow Management: Models, Methods, and Systems

An example: insurance claim

1. **recording** the receipt of the claim
2. establishing the **type** of the claim
3. checking covering of client's **policy**
4. checking the **premium** (payments up to date?)
5. decision for **rejection/admission**:
6. if 3 or 4 has negative result: producing a **rejection letter**, then 12
7. if 3 & 4 have positive results: sending **estimate** amount to be paid,
8. recording client's **reaction**
9. **assessment** of objection:
10. if 9 has negative result: decision to **revise** 7
11. if 9 has positive result: **payment** of claim
12. **filing** and closure of claim


Tasks

1. [recording](#) the receipt of the claim
2. establishing the [type](#) of the claim
3. checking covering of client's [policy](#)
4. checking the [premium](#) (payments up to date?)
5. decision for [rejection/admission](#):
6. if 3 or 4 has negative result: producing a [rejection letter](#), then 12
7. if 3 & 4 have positive results: sending [estimate](#) amount to be paid,
8. recording client's [reaction](#)
9. [assessment](#) of objection:
10. if 9 has negative result: decision to [revise](#) 7
11. if 9 has positive result: [payment](#) of claim
12. [filing](#) and closure of claim

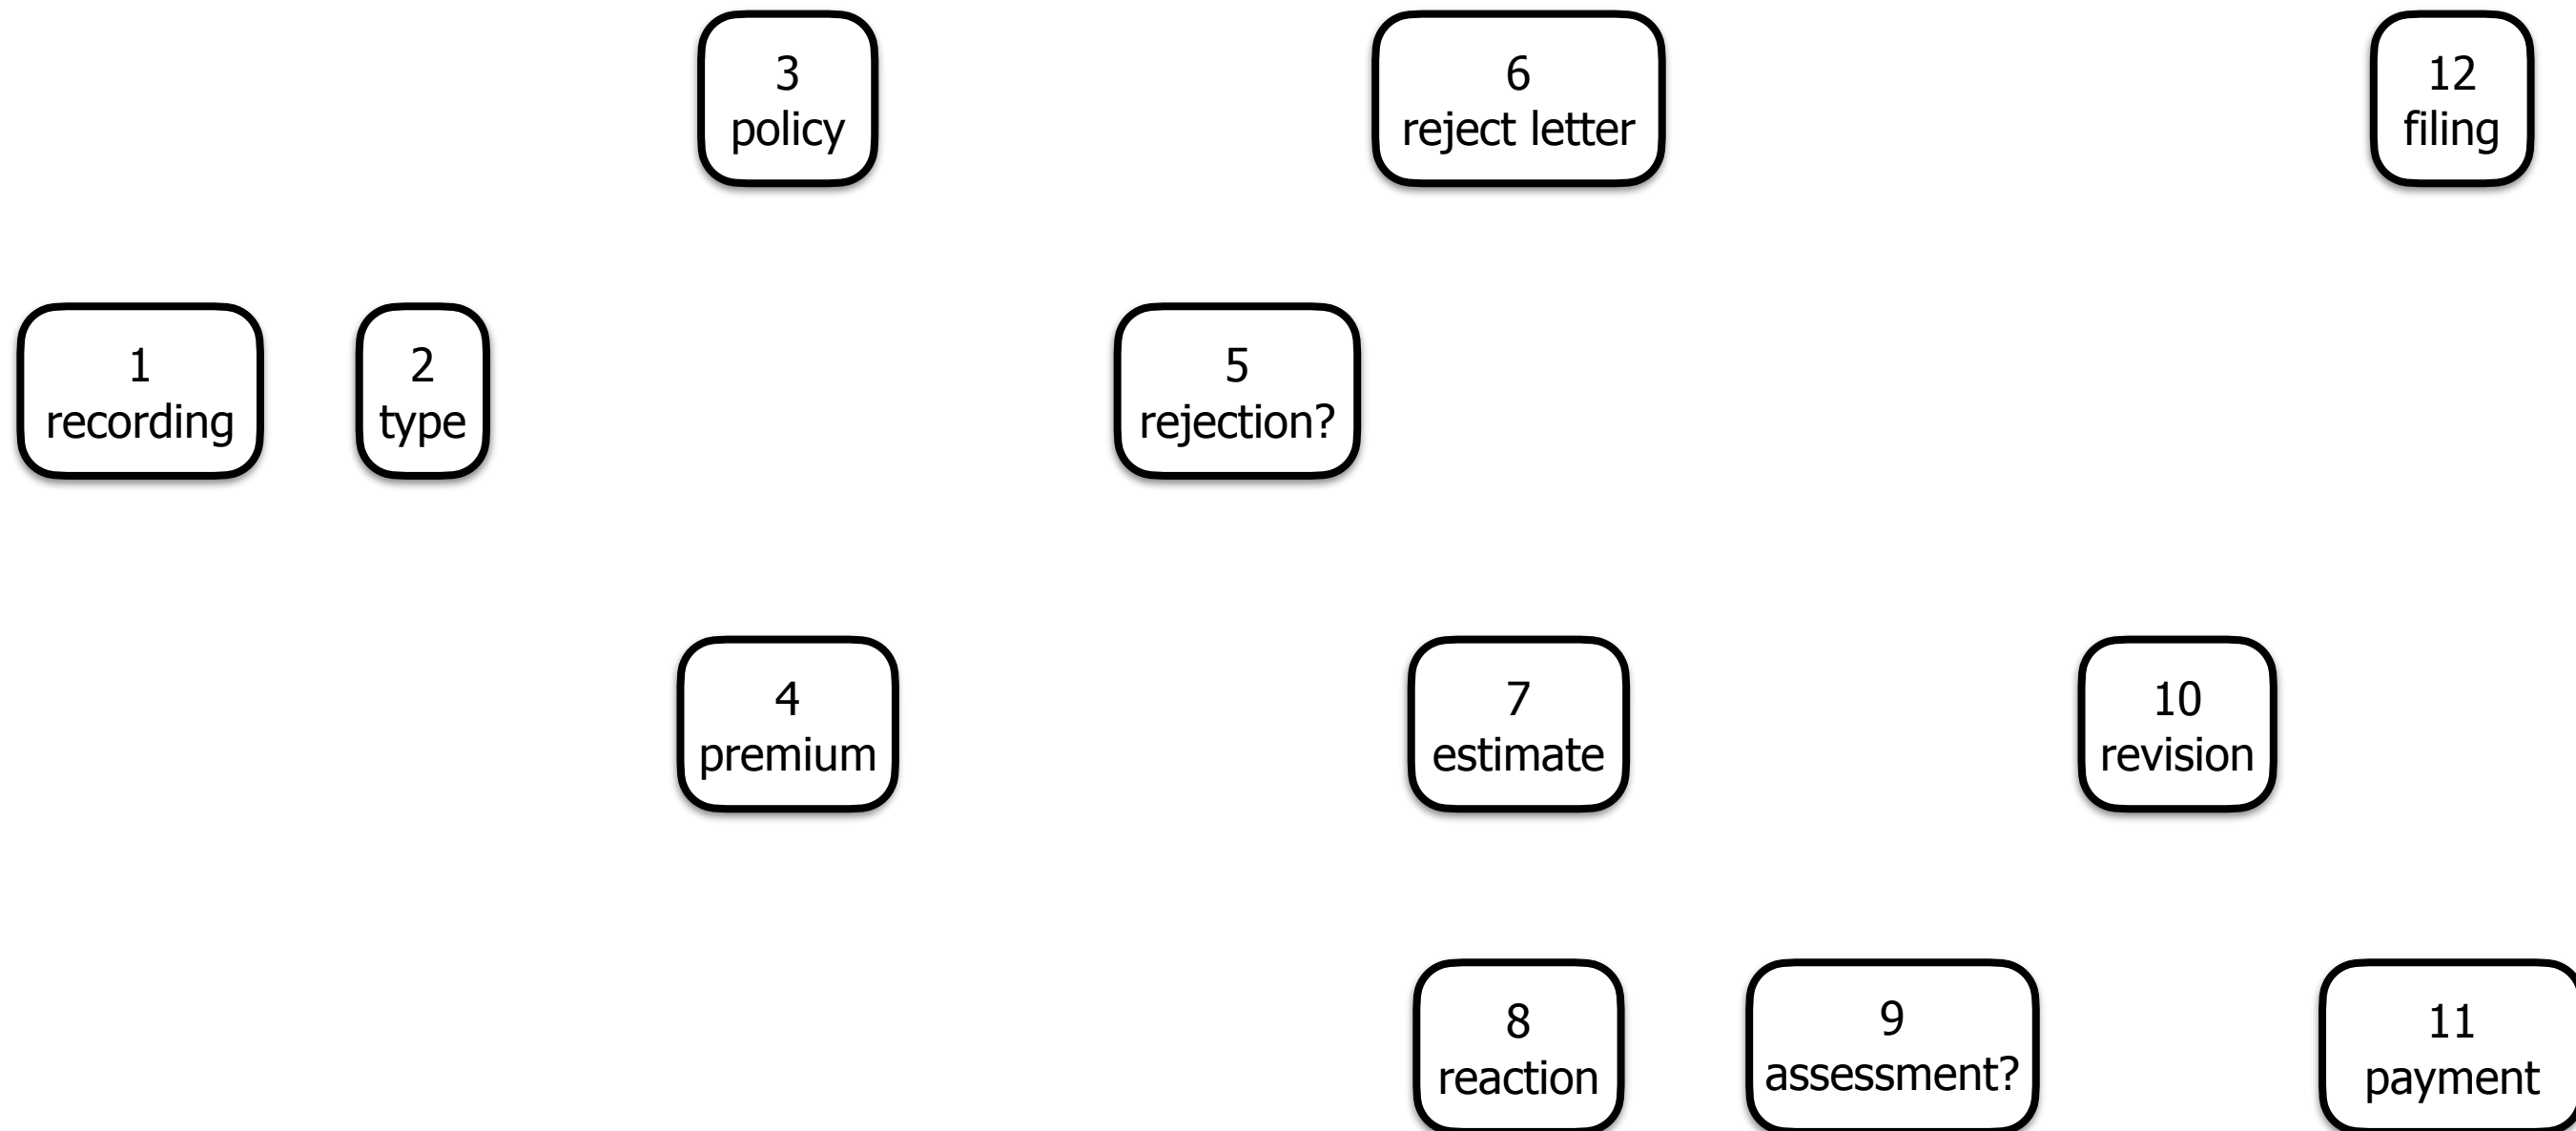


1. recording the receipt of the claim
2. establishing the type of the claim
3. checking covering of client's policy
4. checking the premium (payments up to date?)
5. decision for rejection/admission:
6. if 3 or 4 has negative result: producing a rejection letter, then 12
7. if 3 & 4 have positive results: sending estimate amount to be paid,
8. recording client's reaction
9. assessment of objection:
10. if 9 has negative result: decision to revise 7
11. if 9 has positive result: payment of claim
12. filing and closure of claim

Links

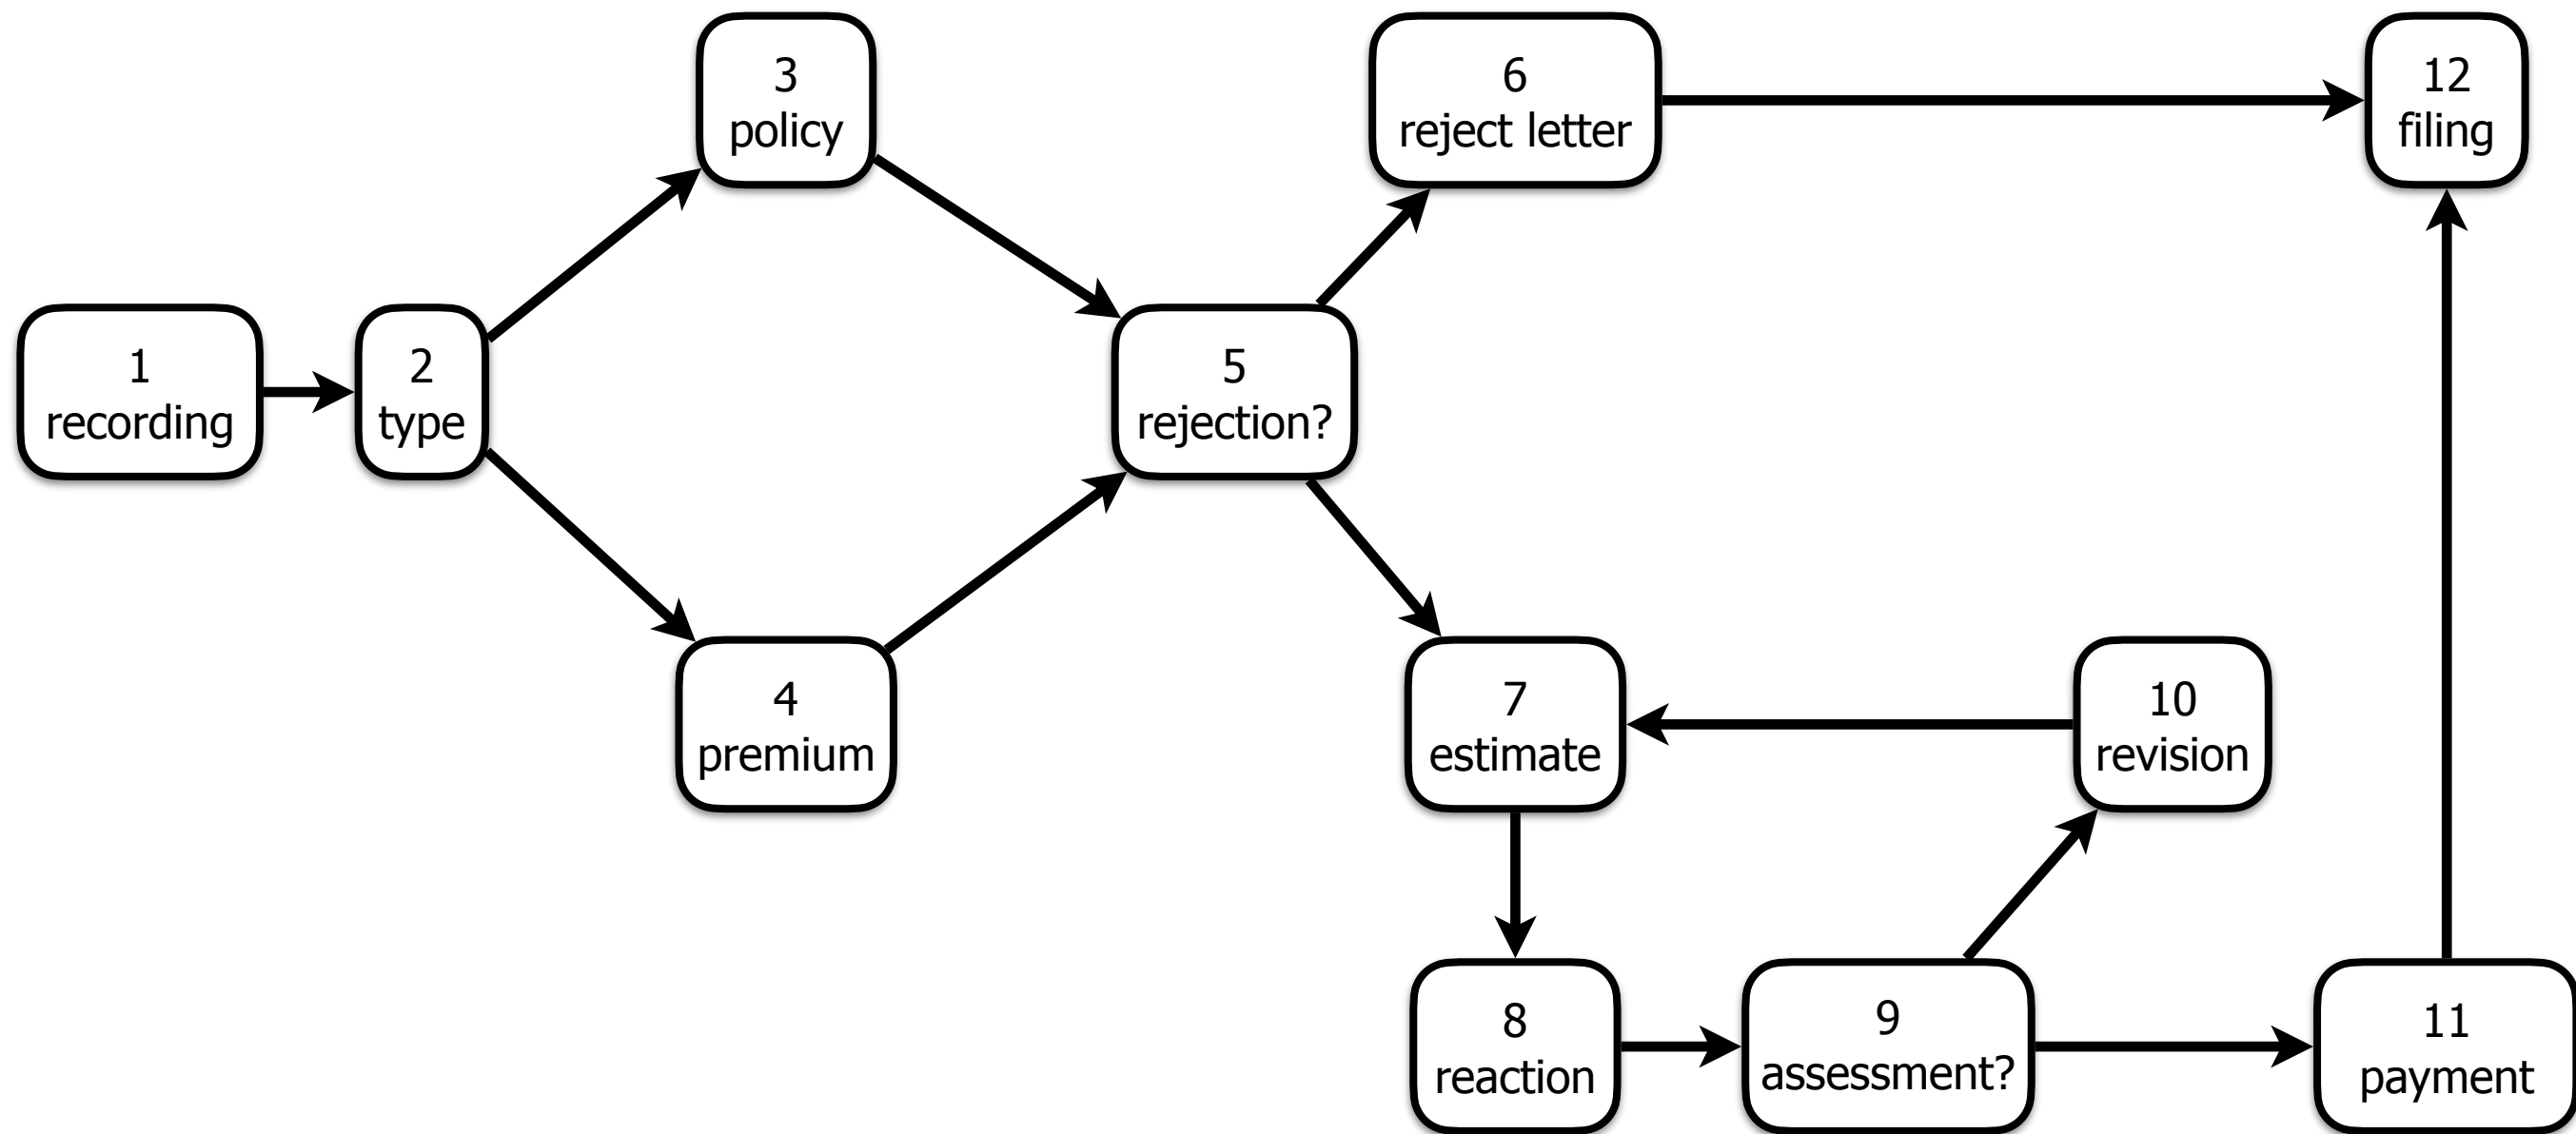


Some patterns



Sequence

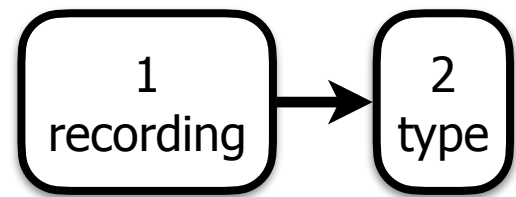


Parallel

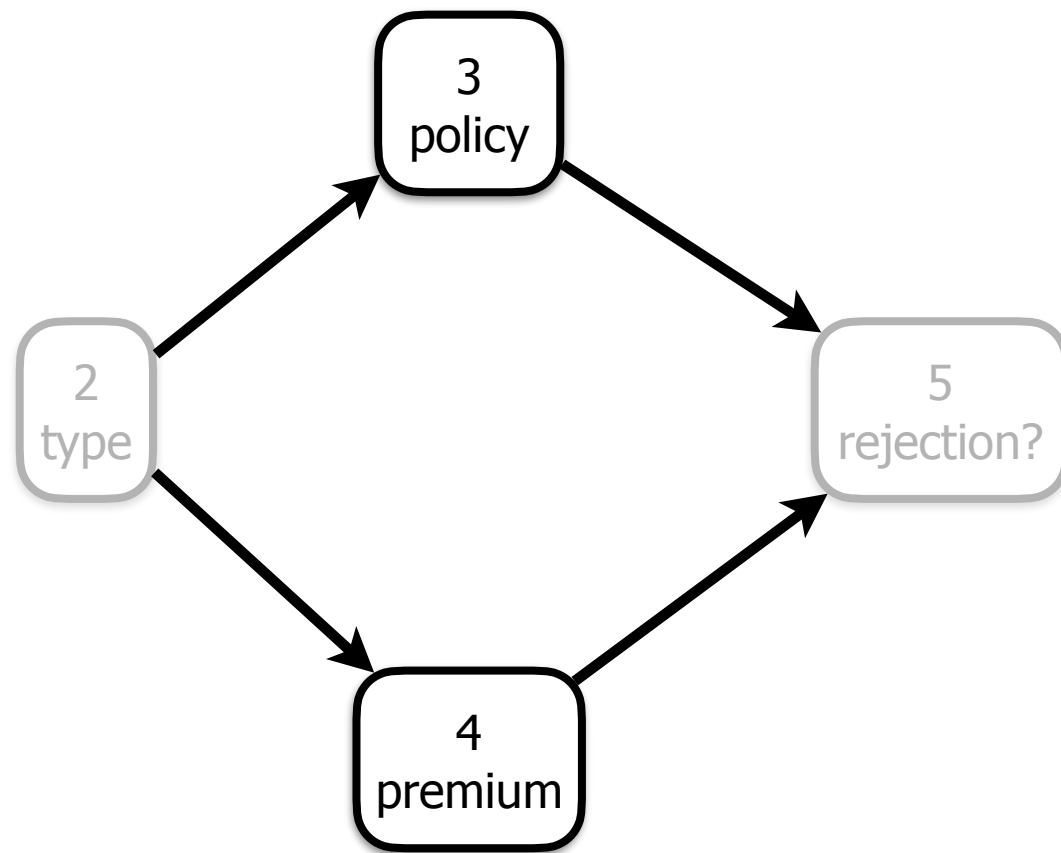


Choice / Split

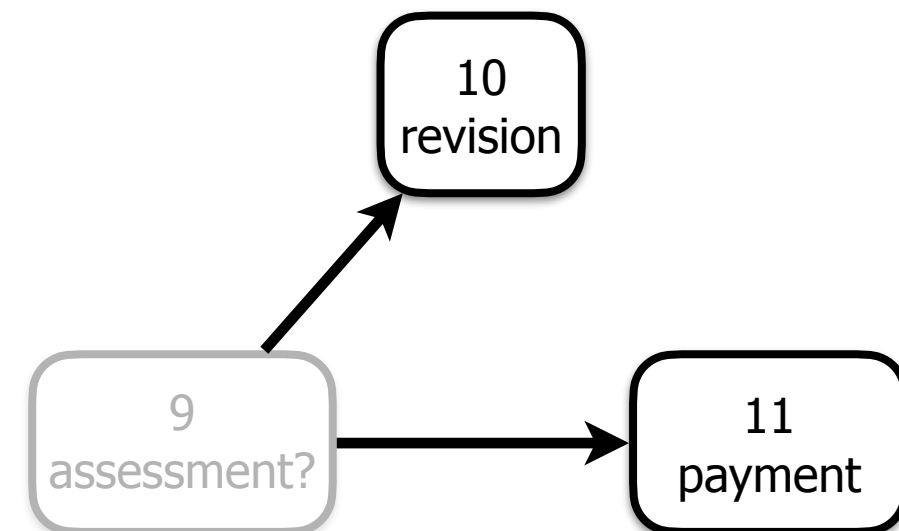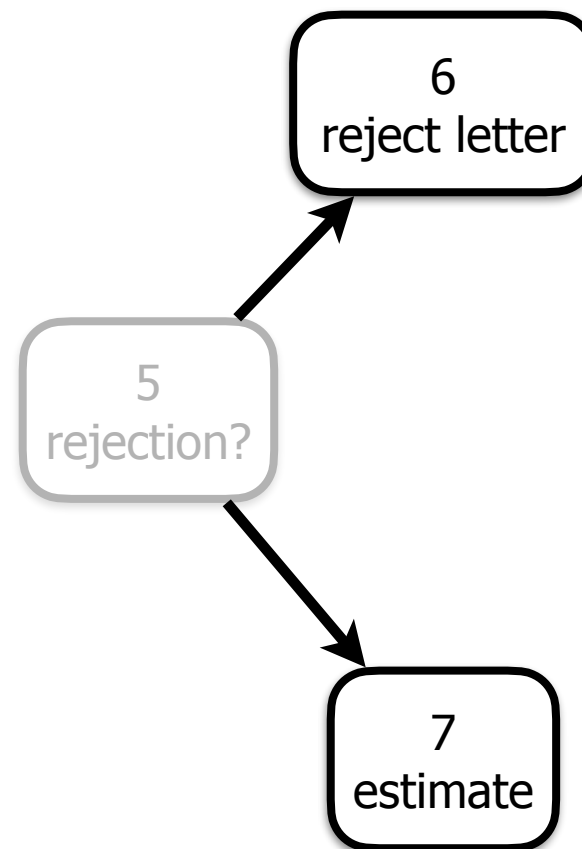

Merge

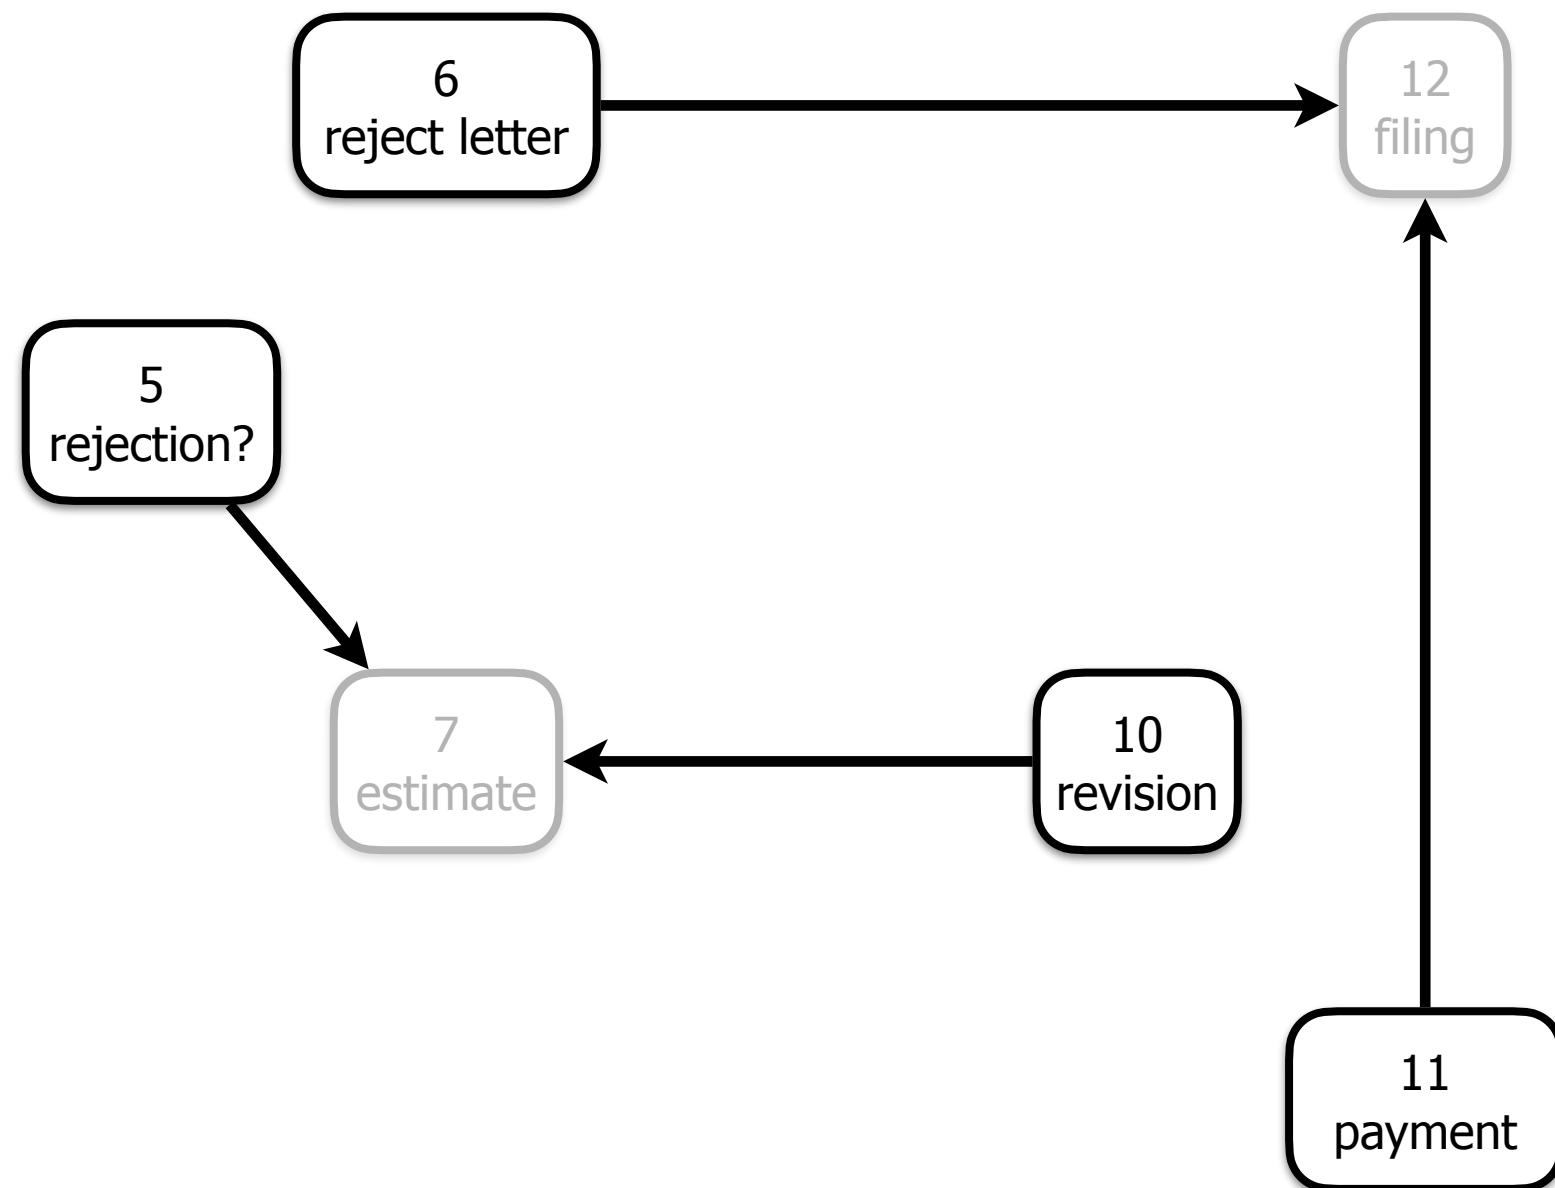


Iteration

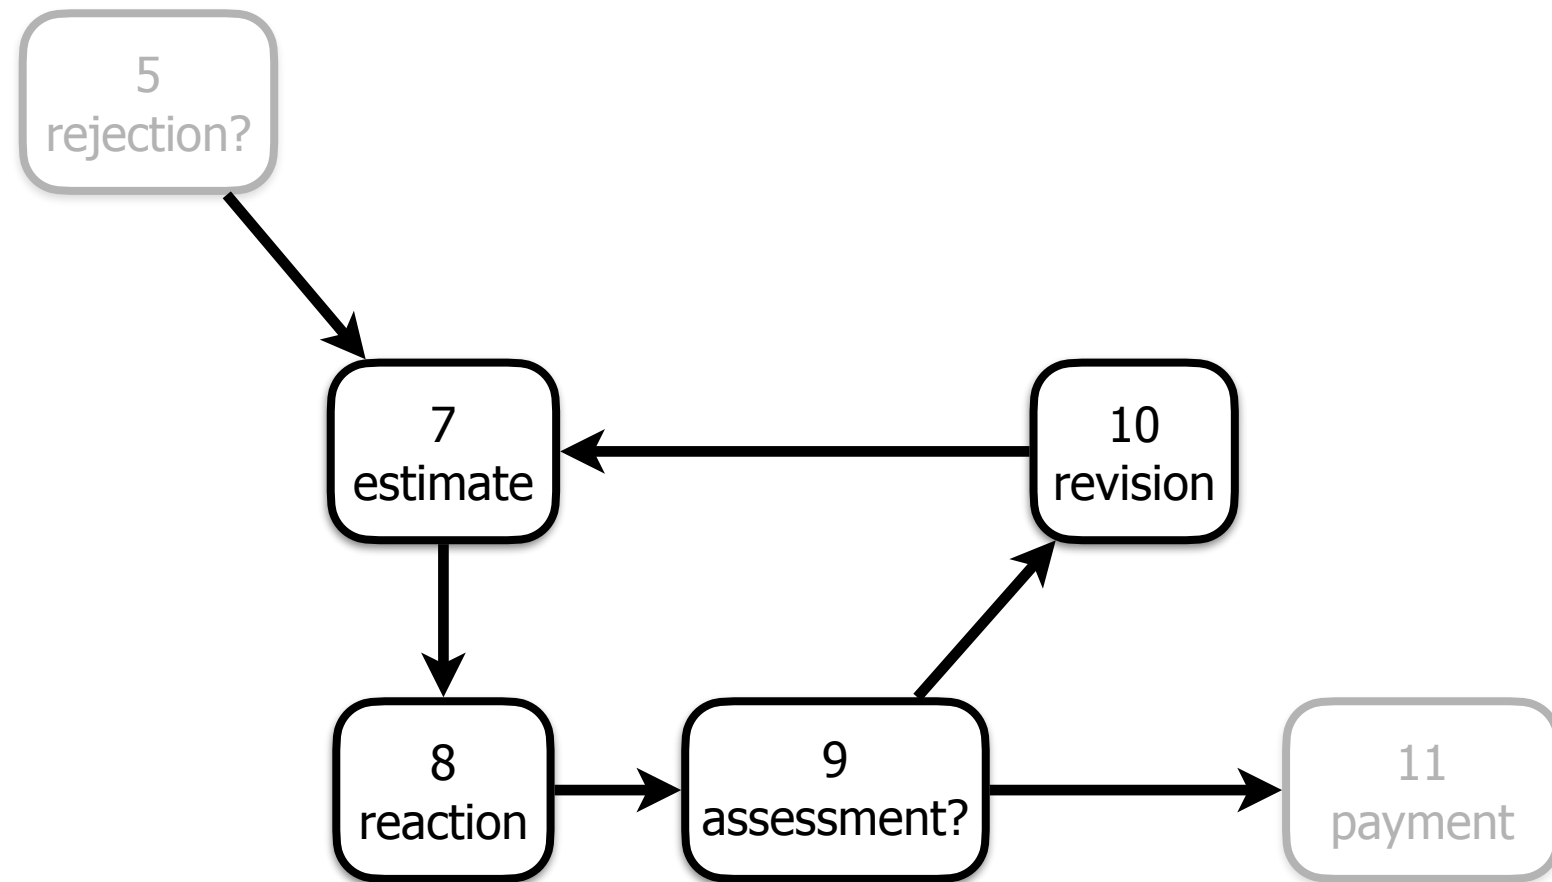


Ambiguity

Ambiguity!


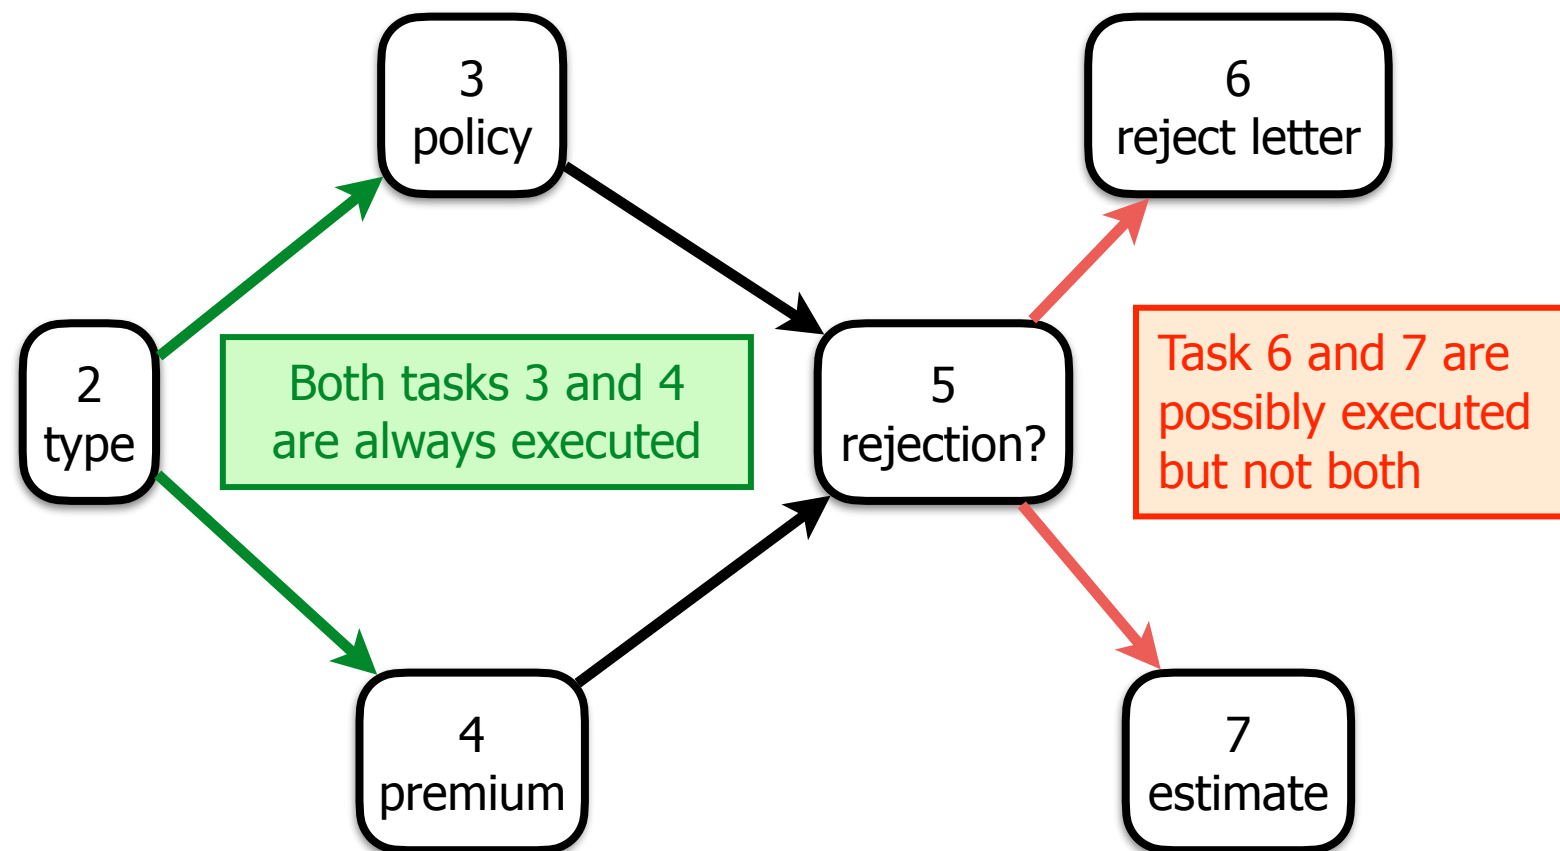


Ambiguity!


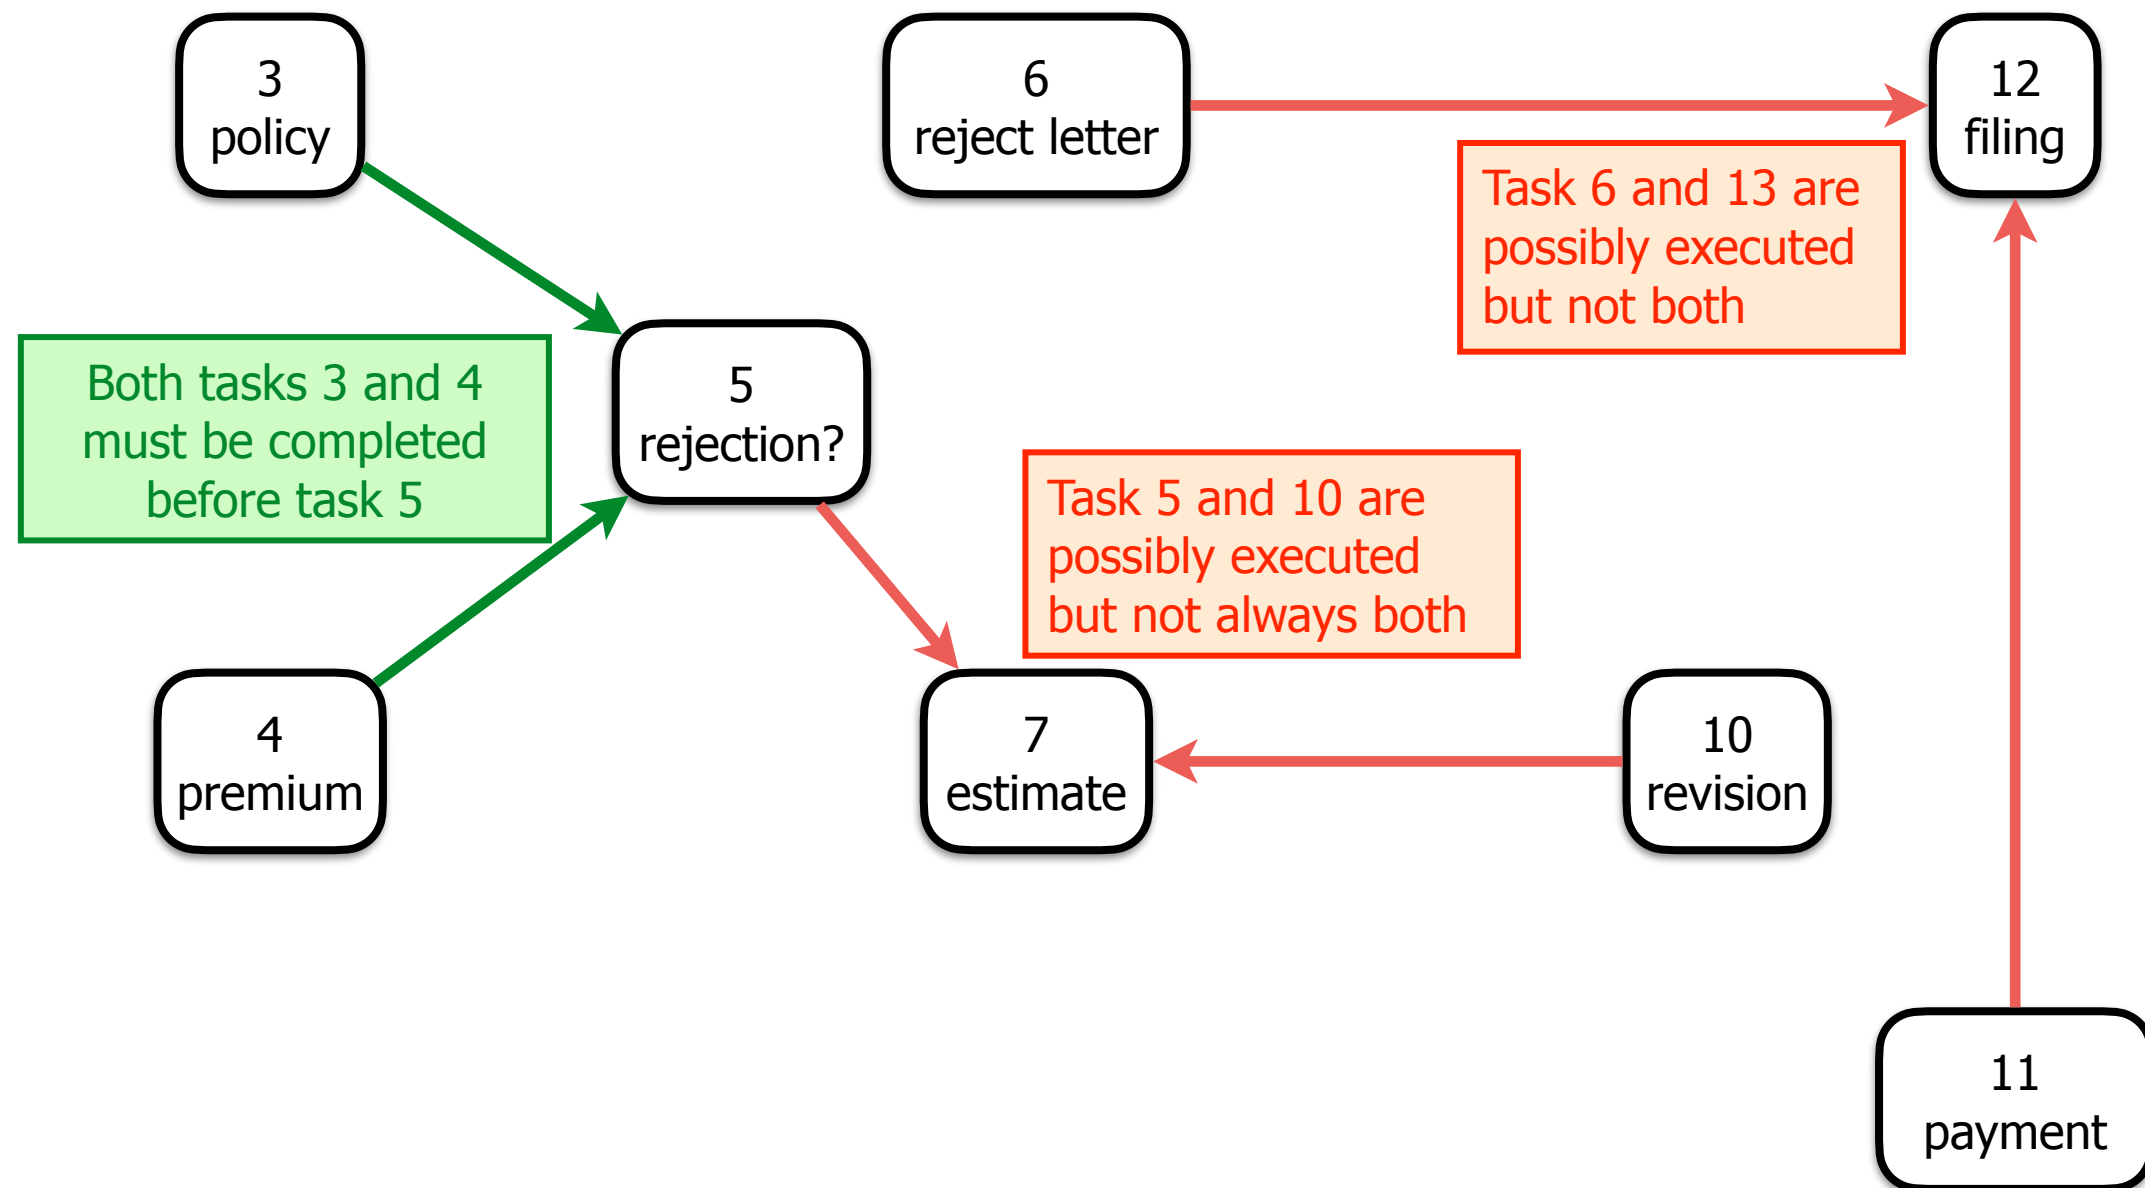


Disambiguation



Disambiguation

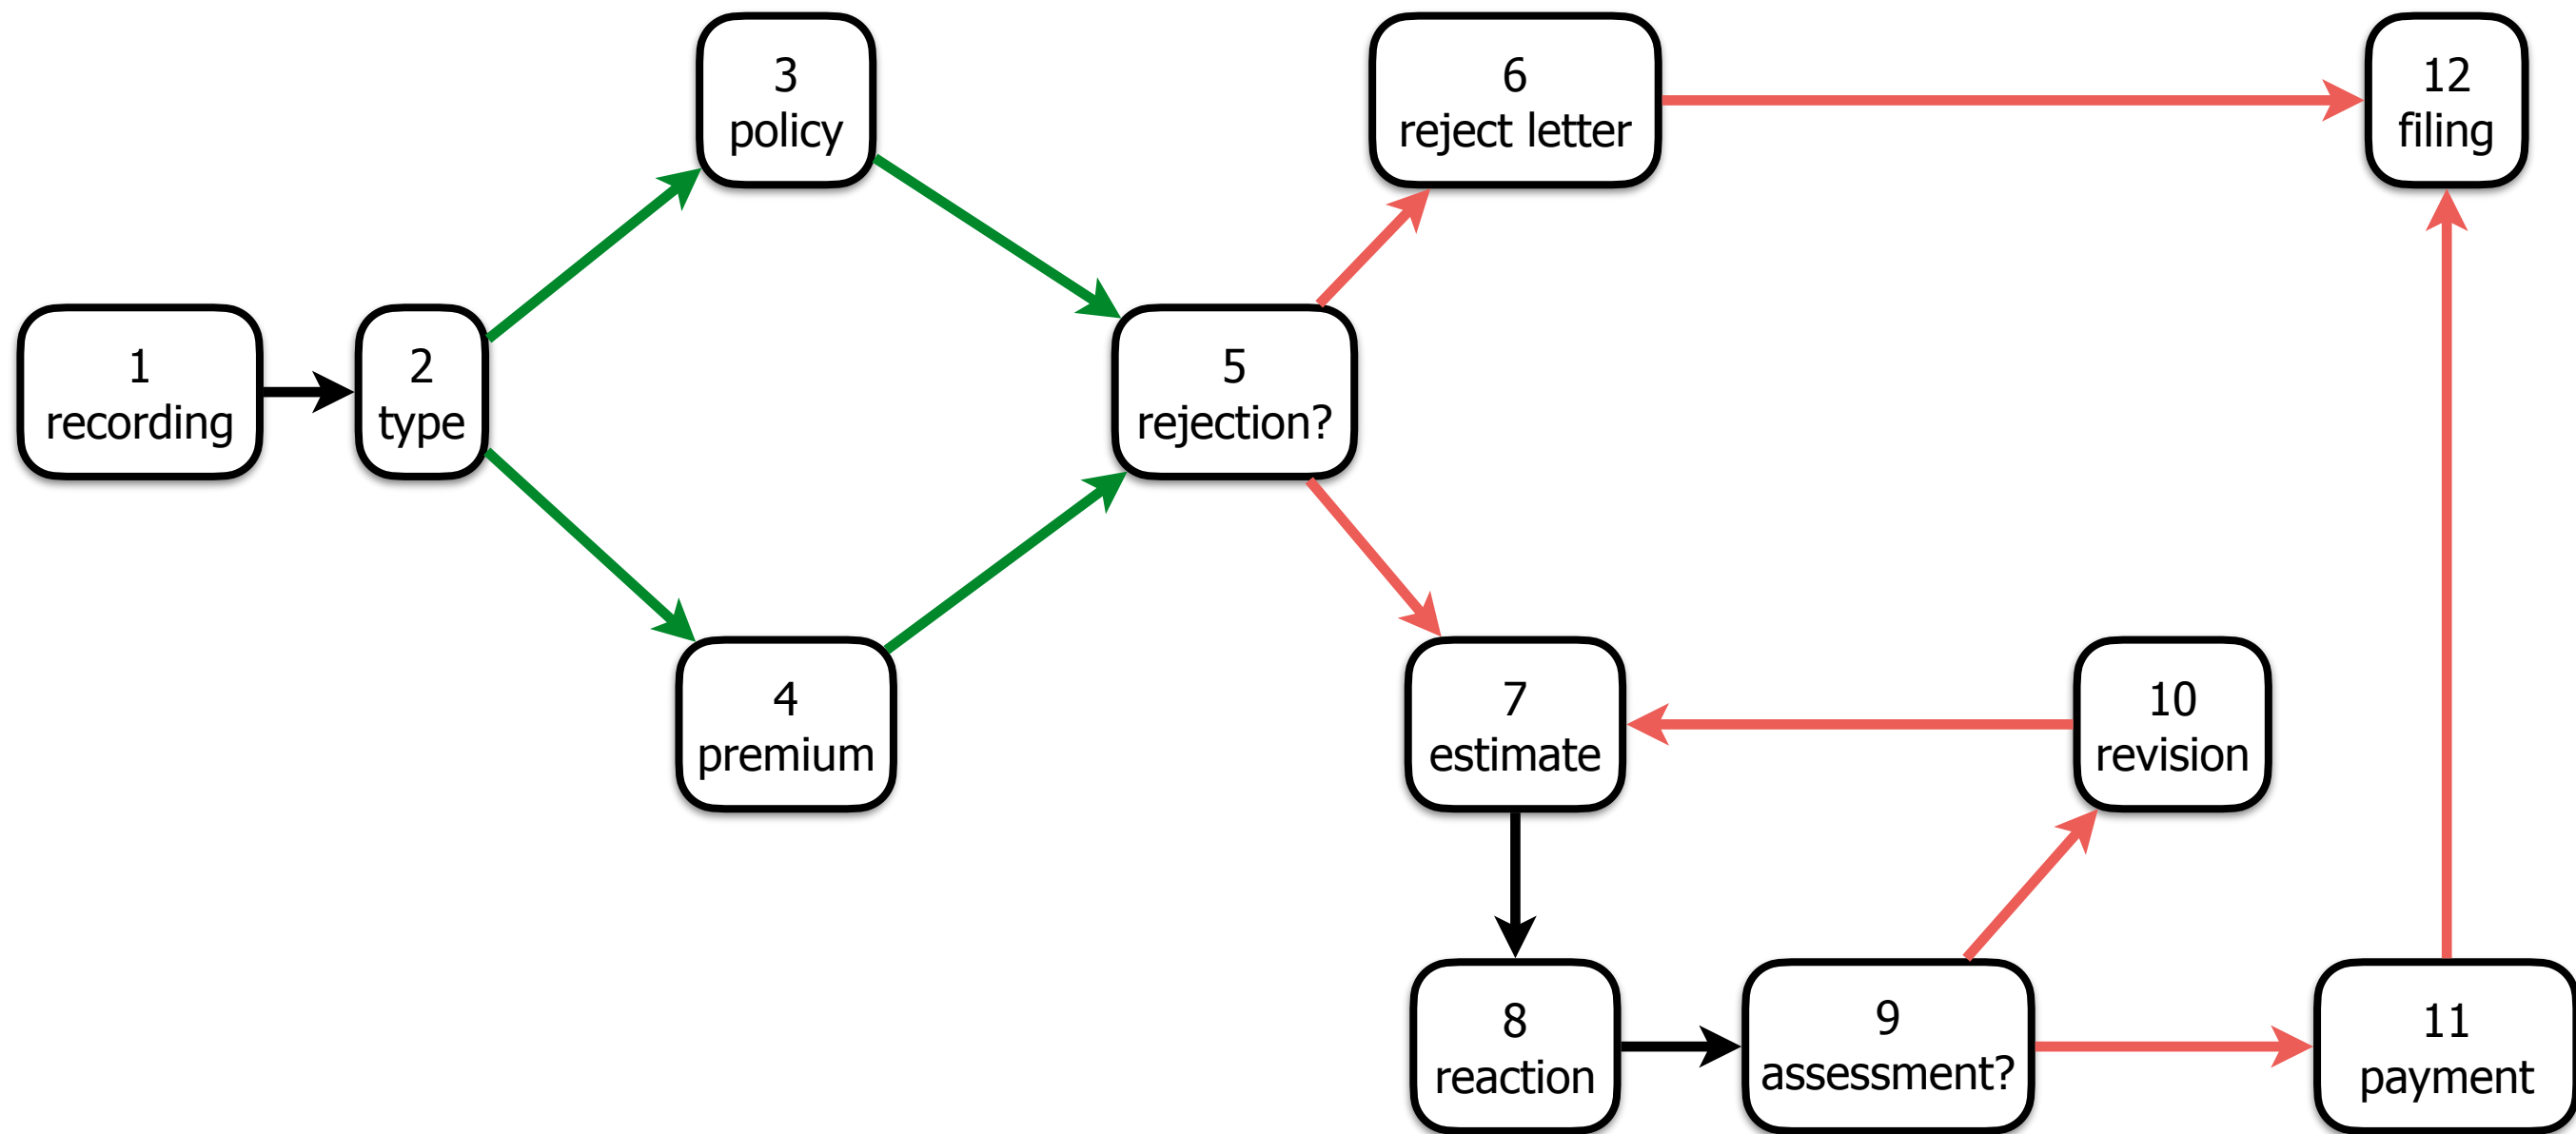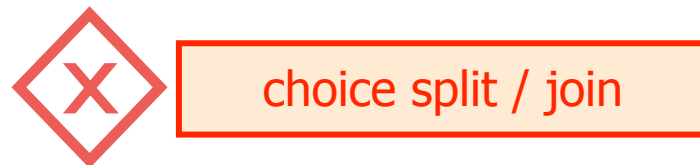



Disambiguation

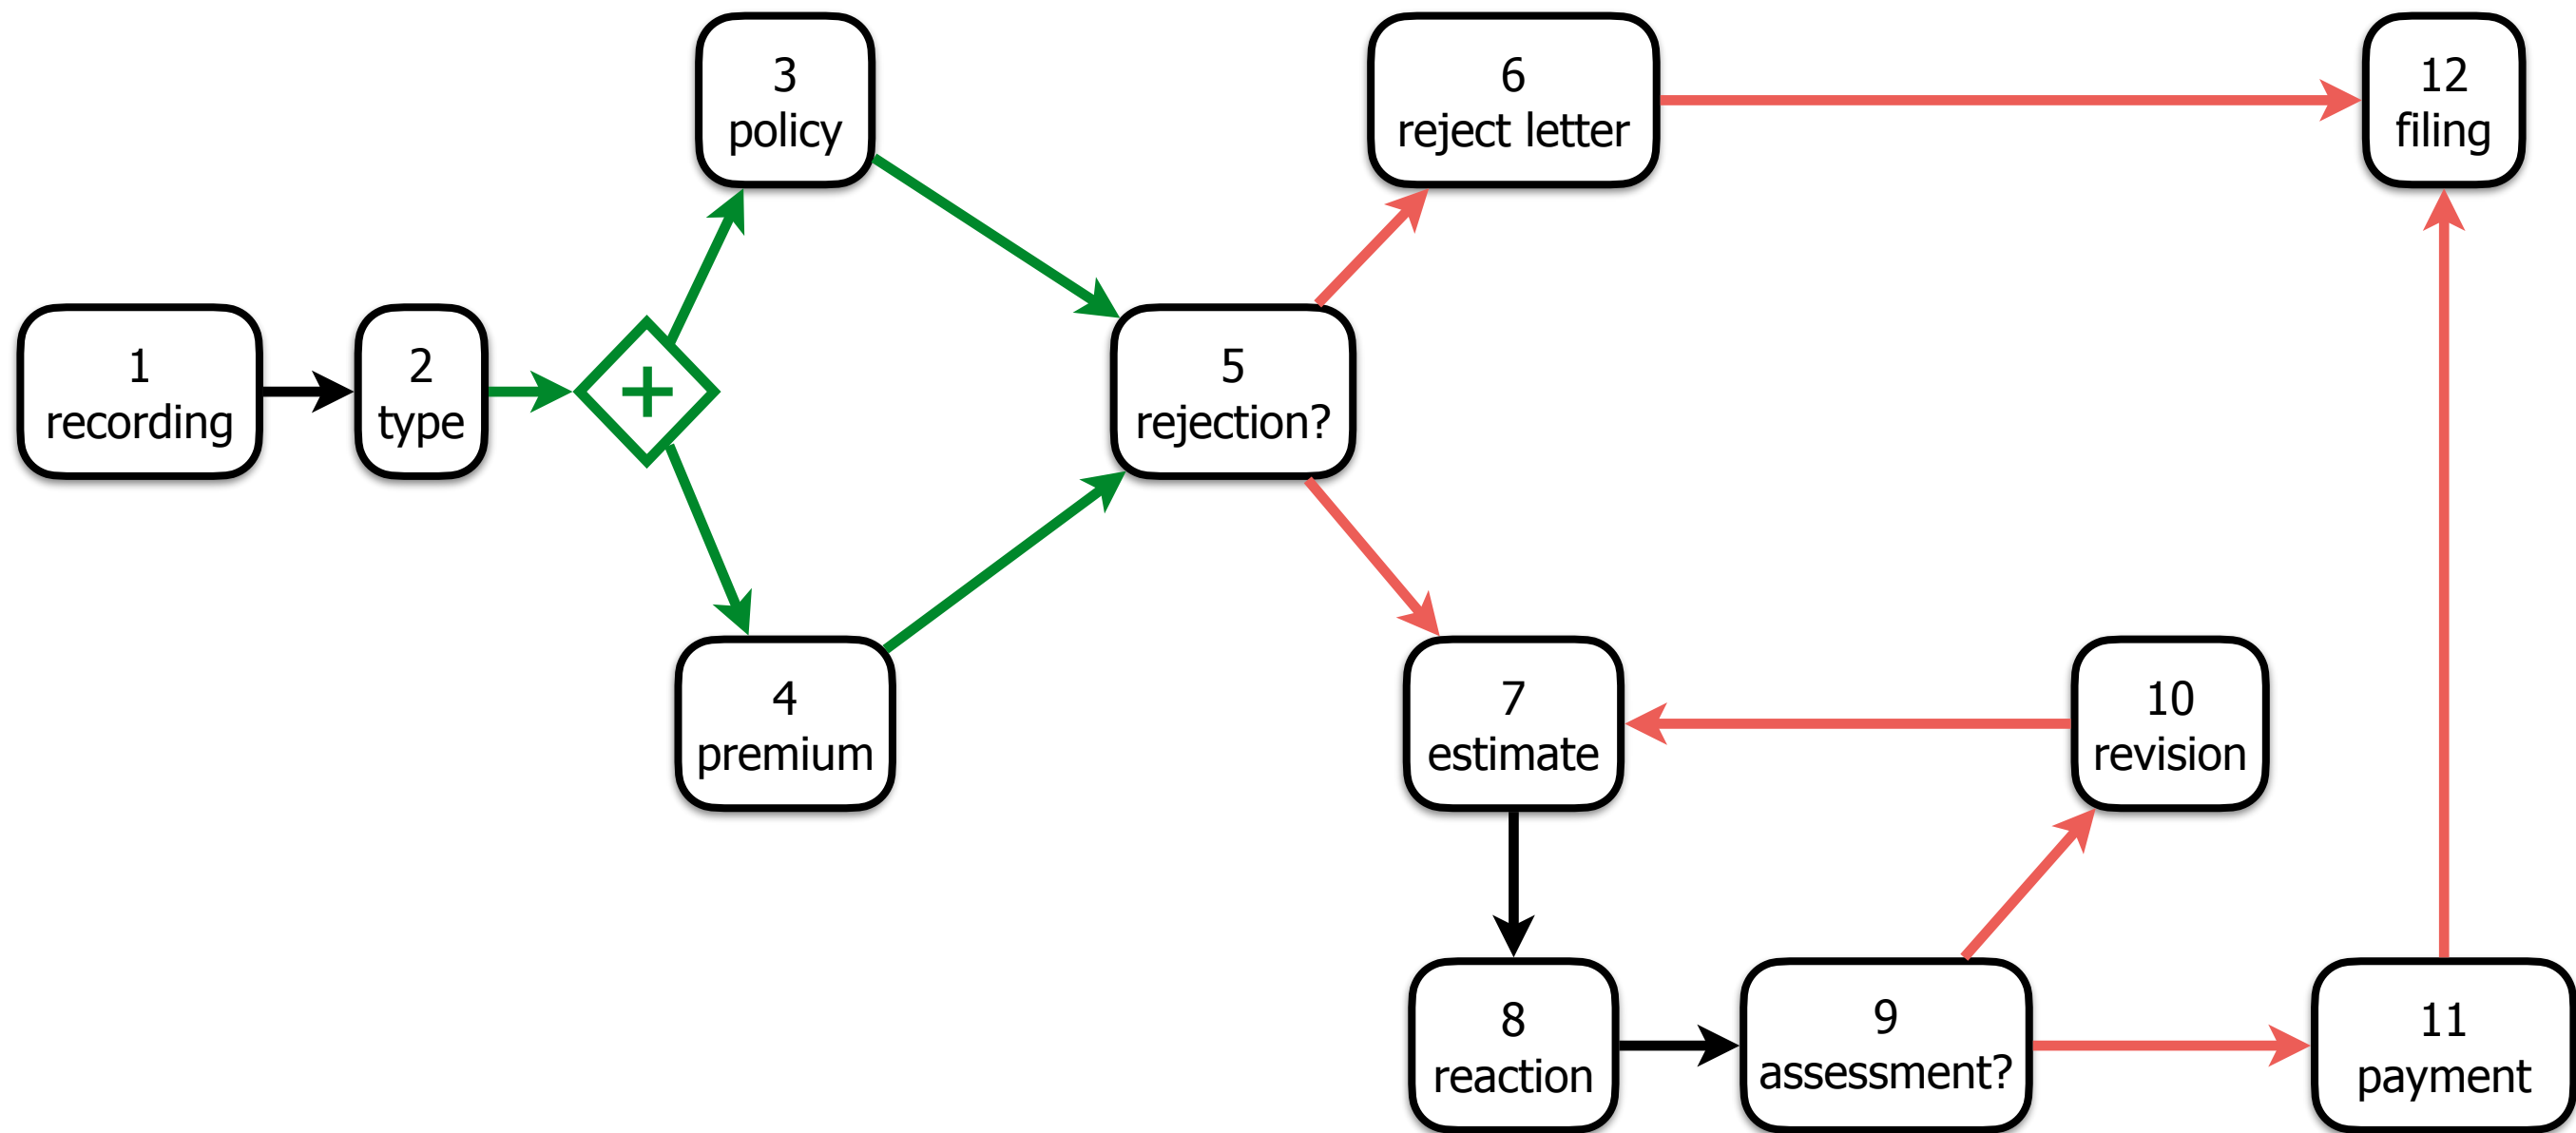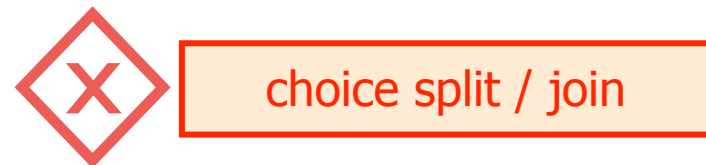


Disambiguation

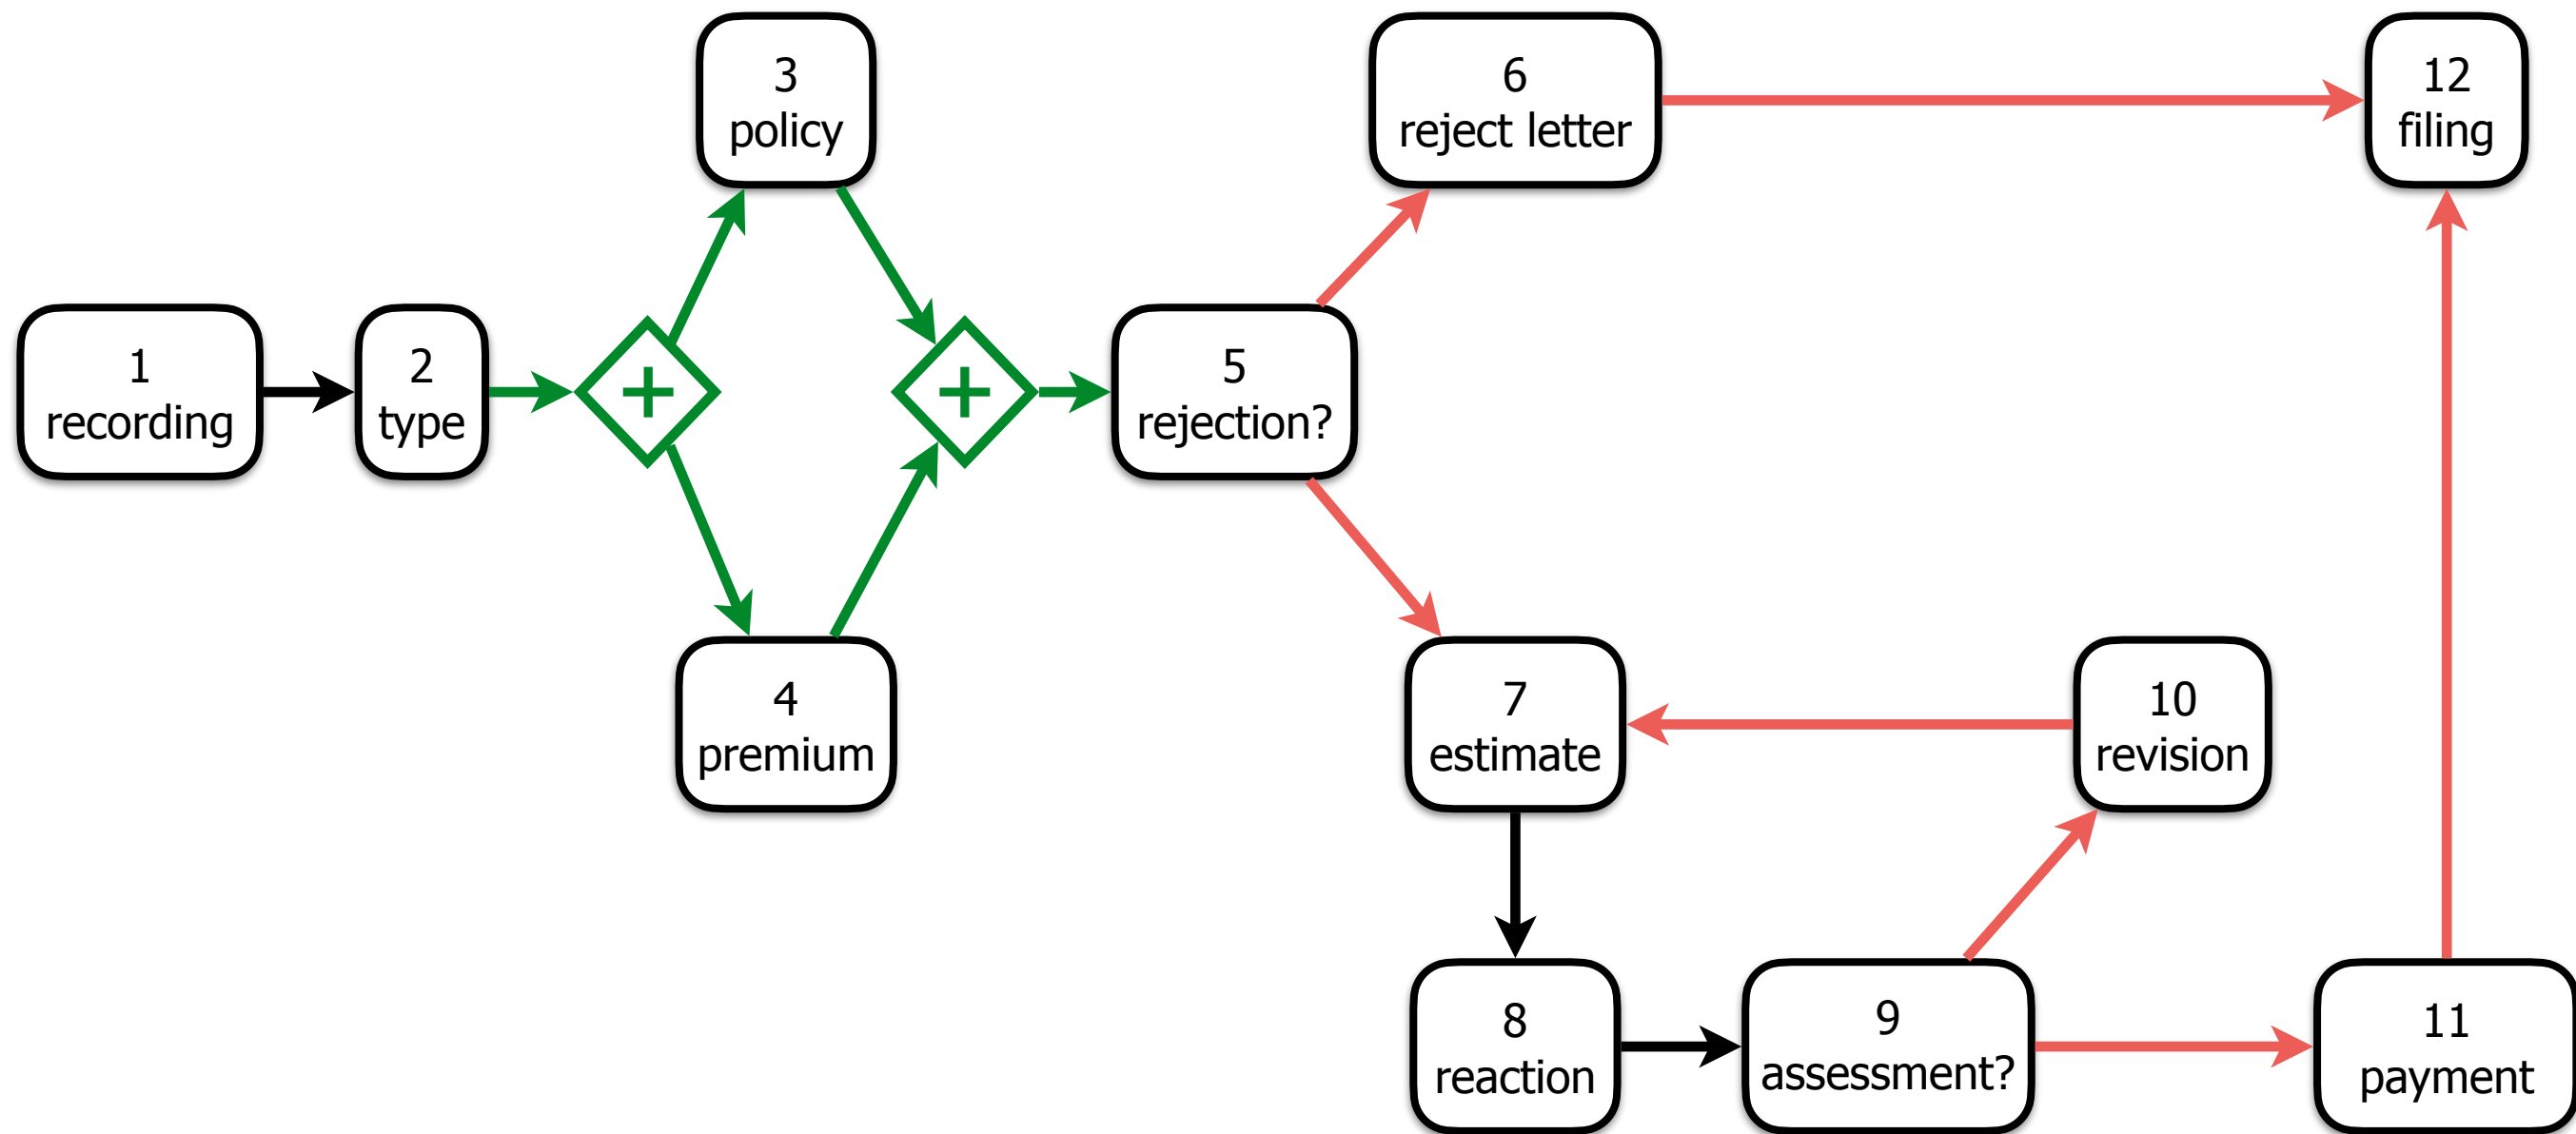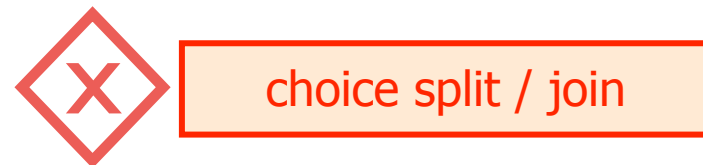



Disambiguation

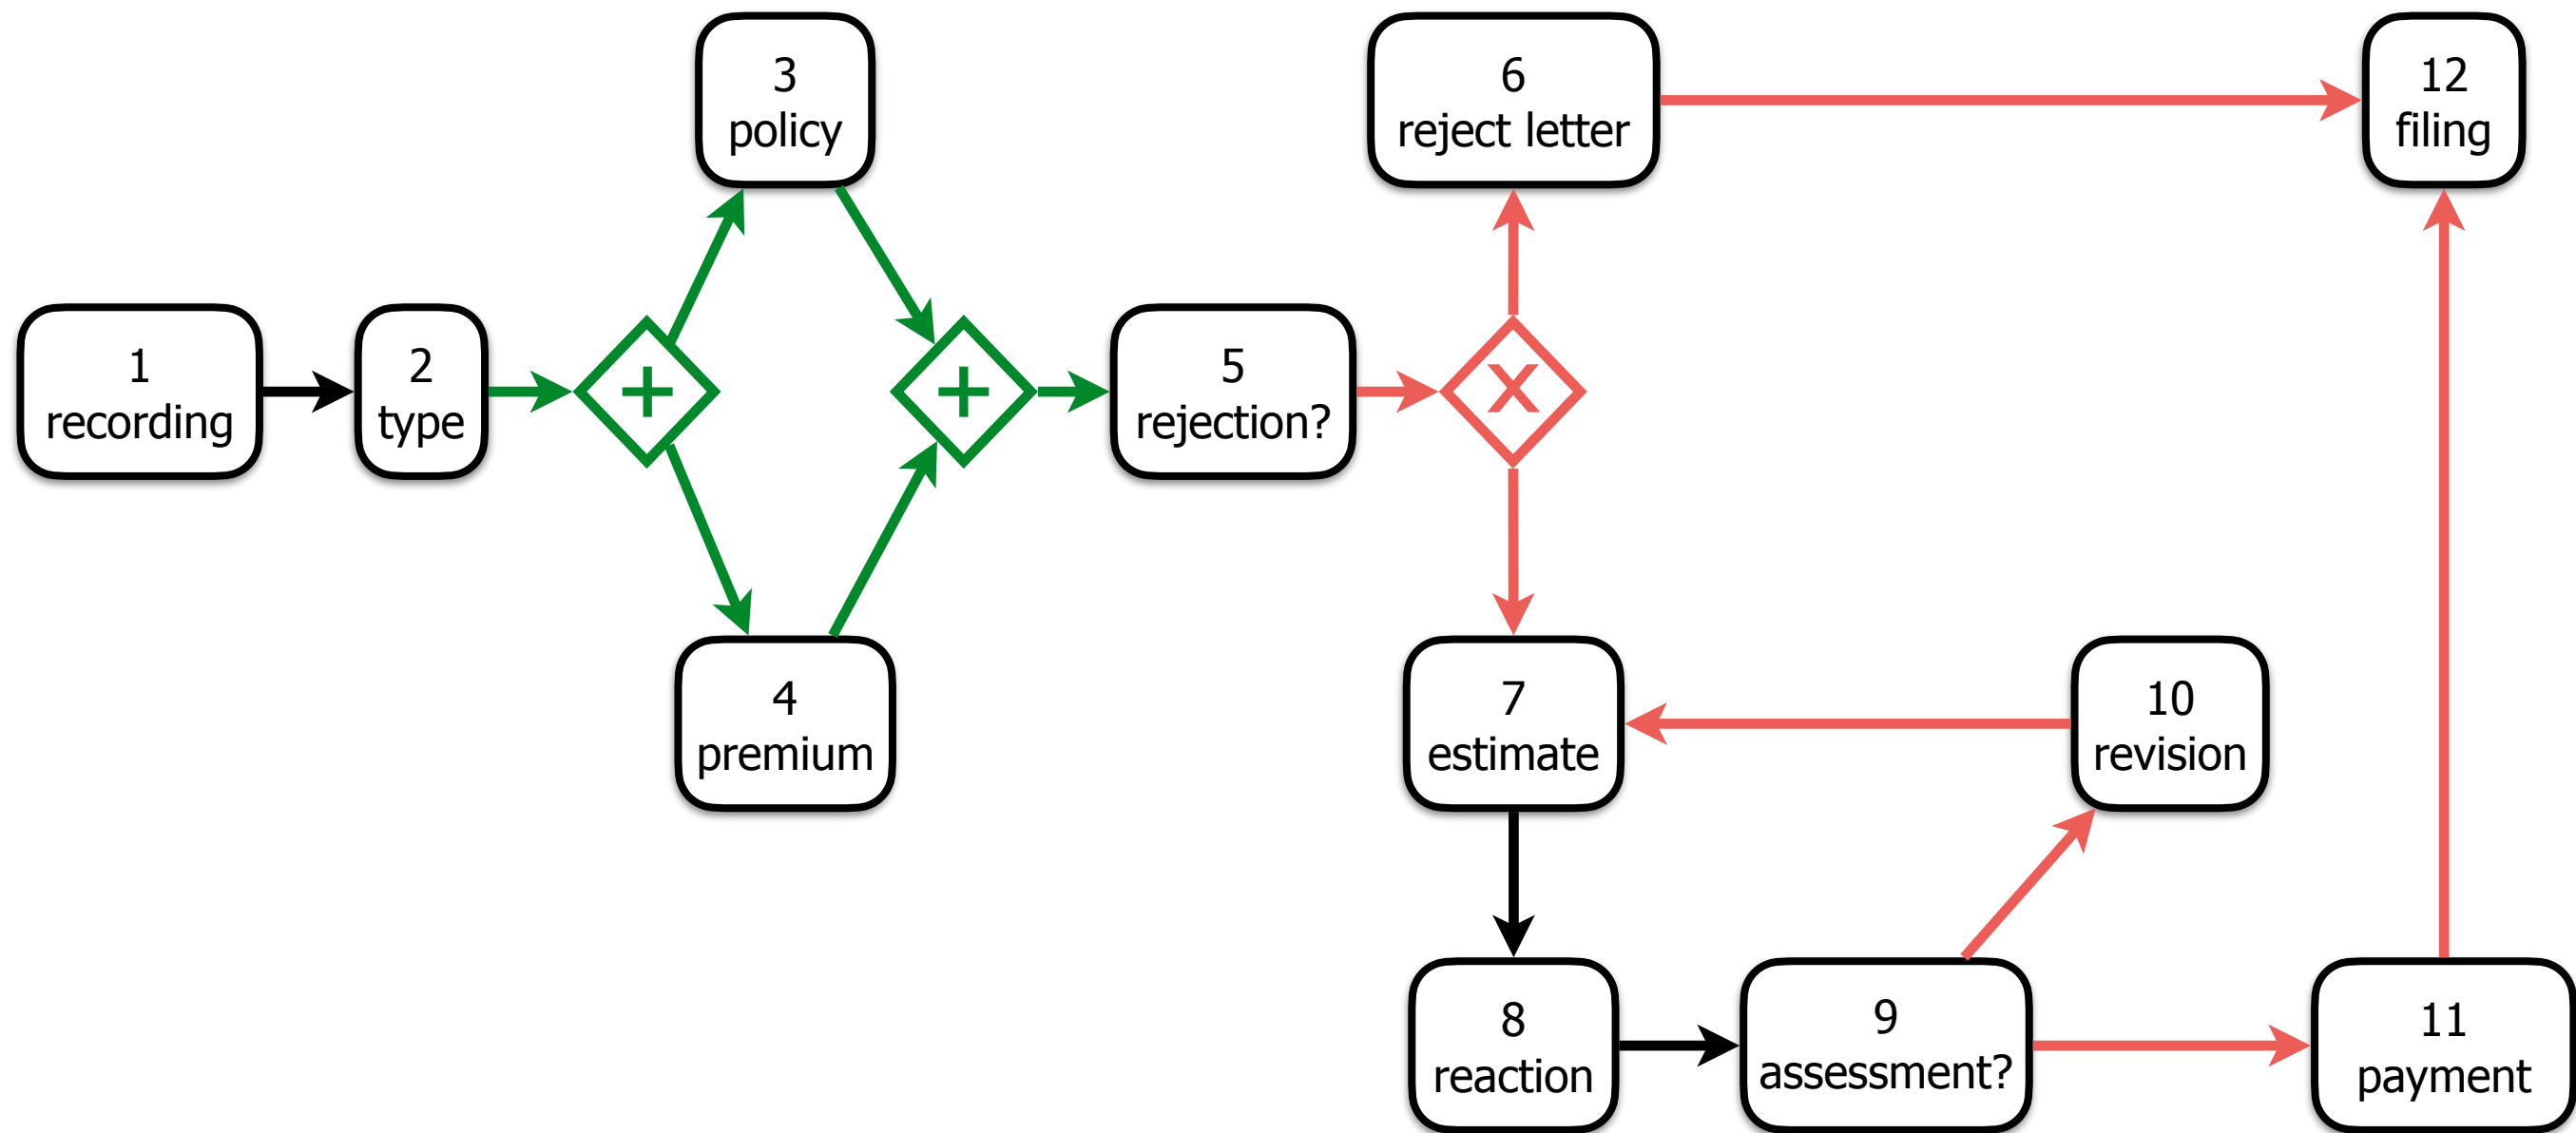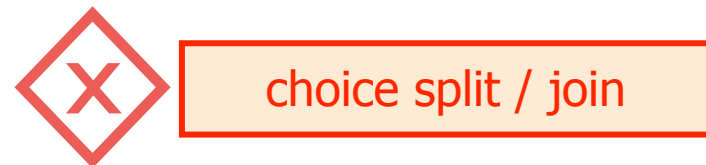



Disambiguation

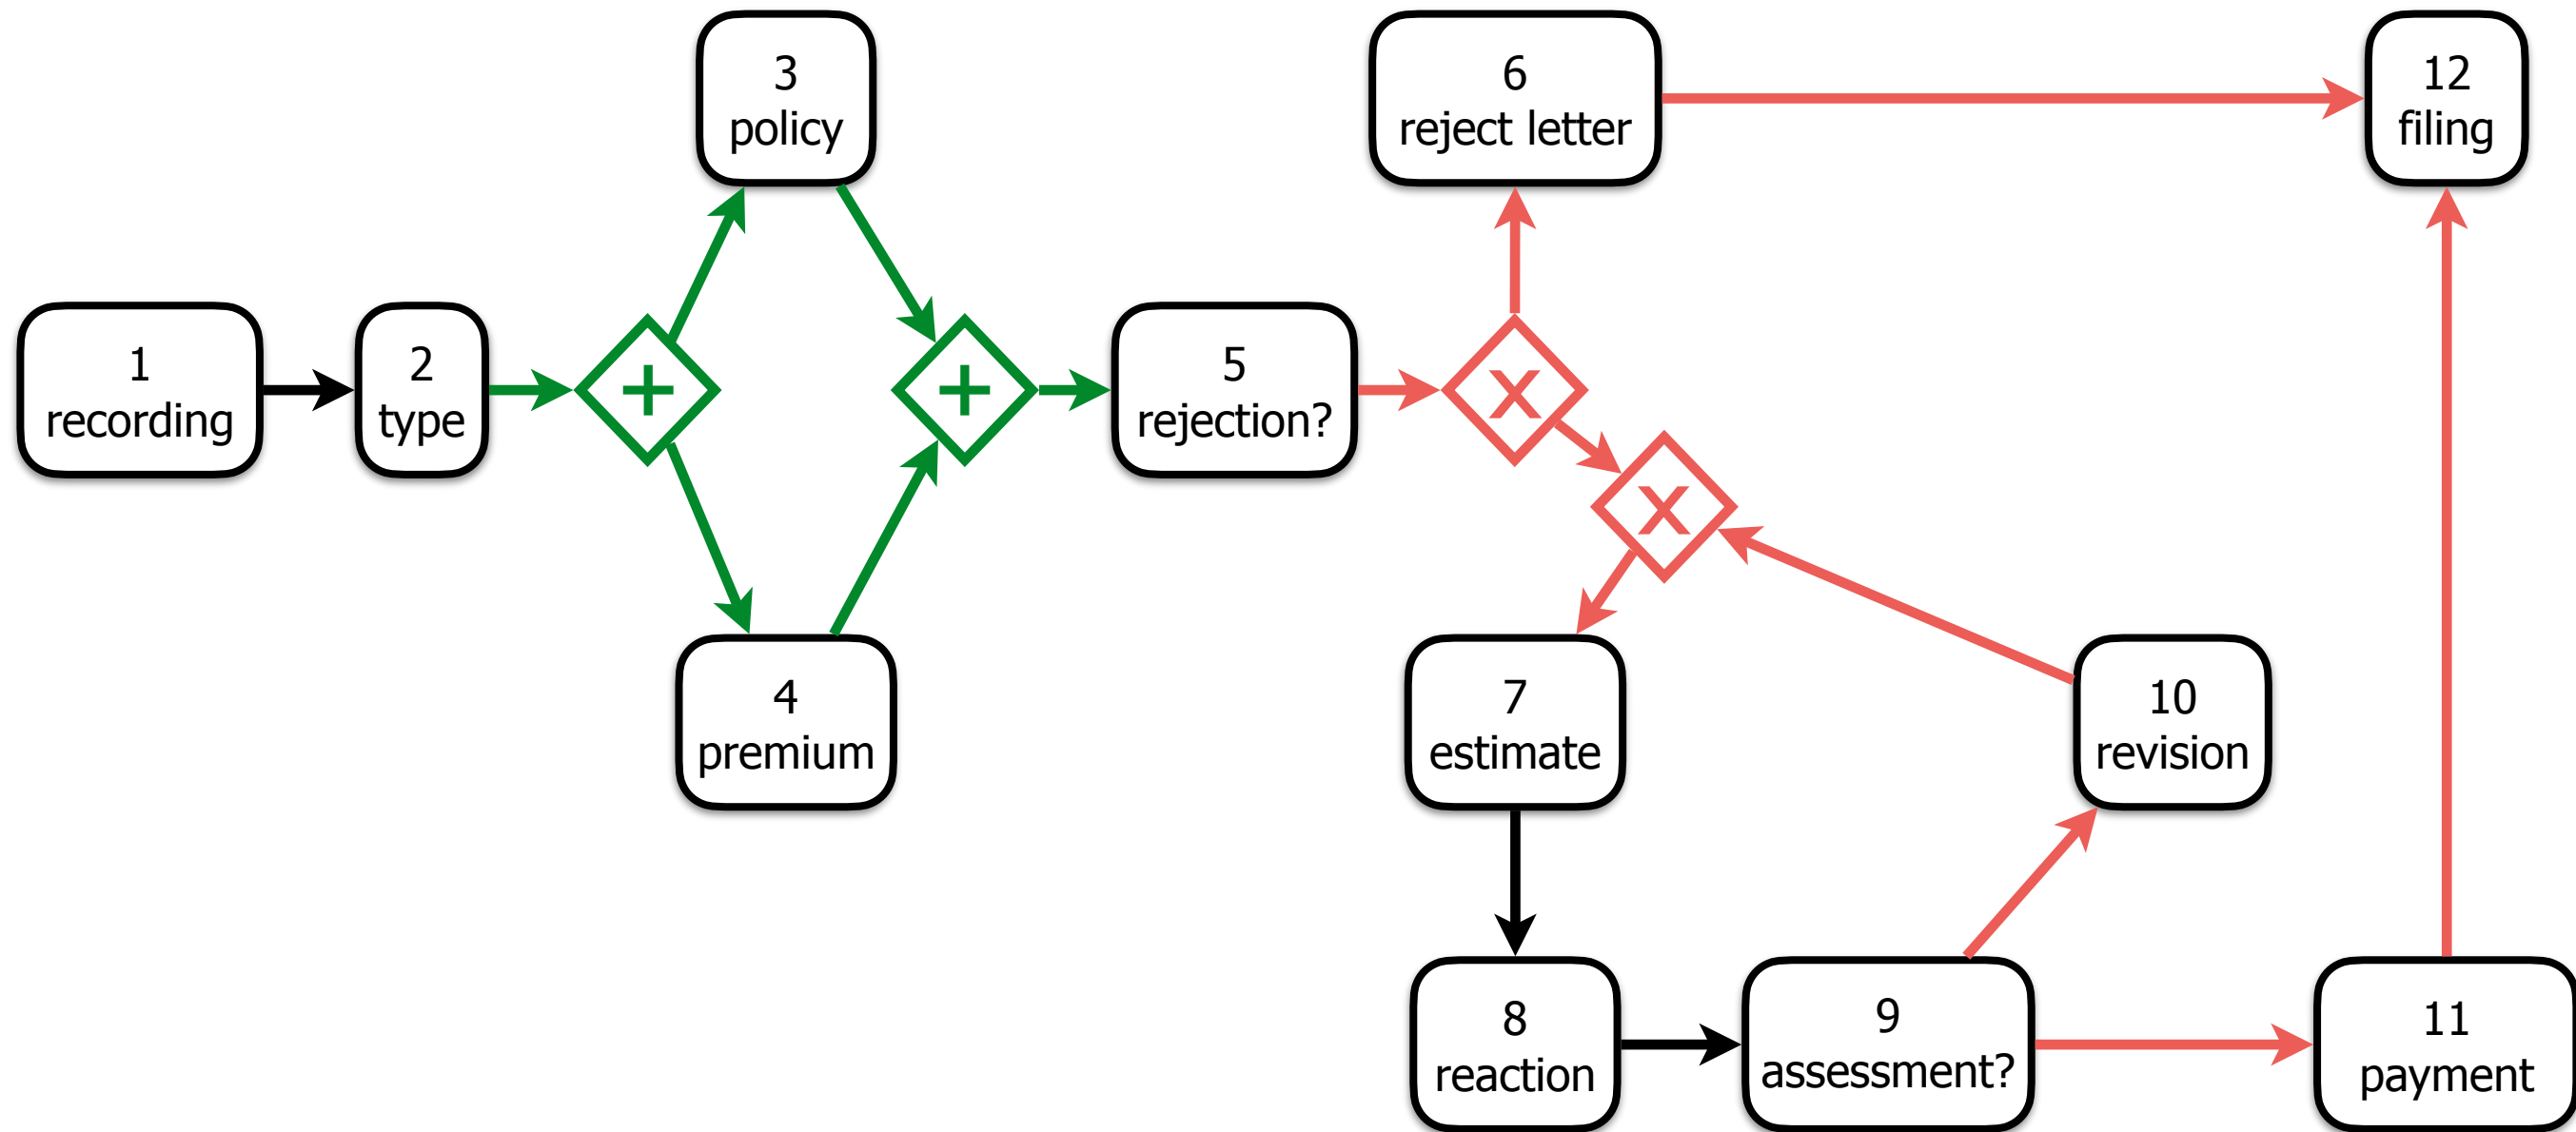


Disambiguation

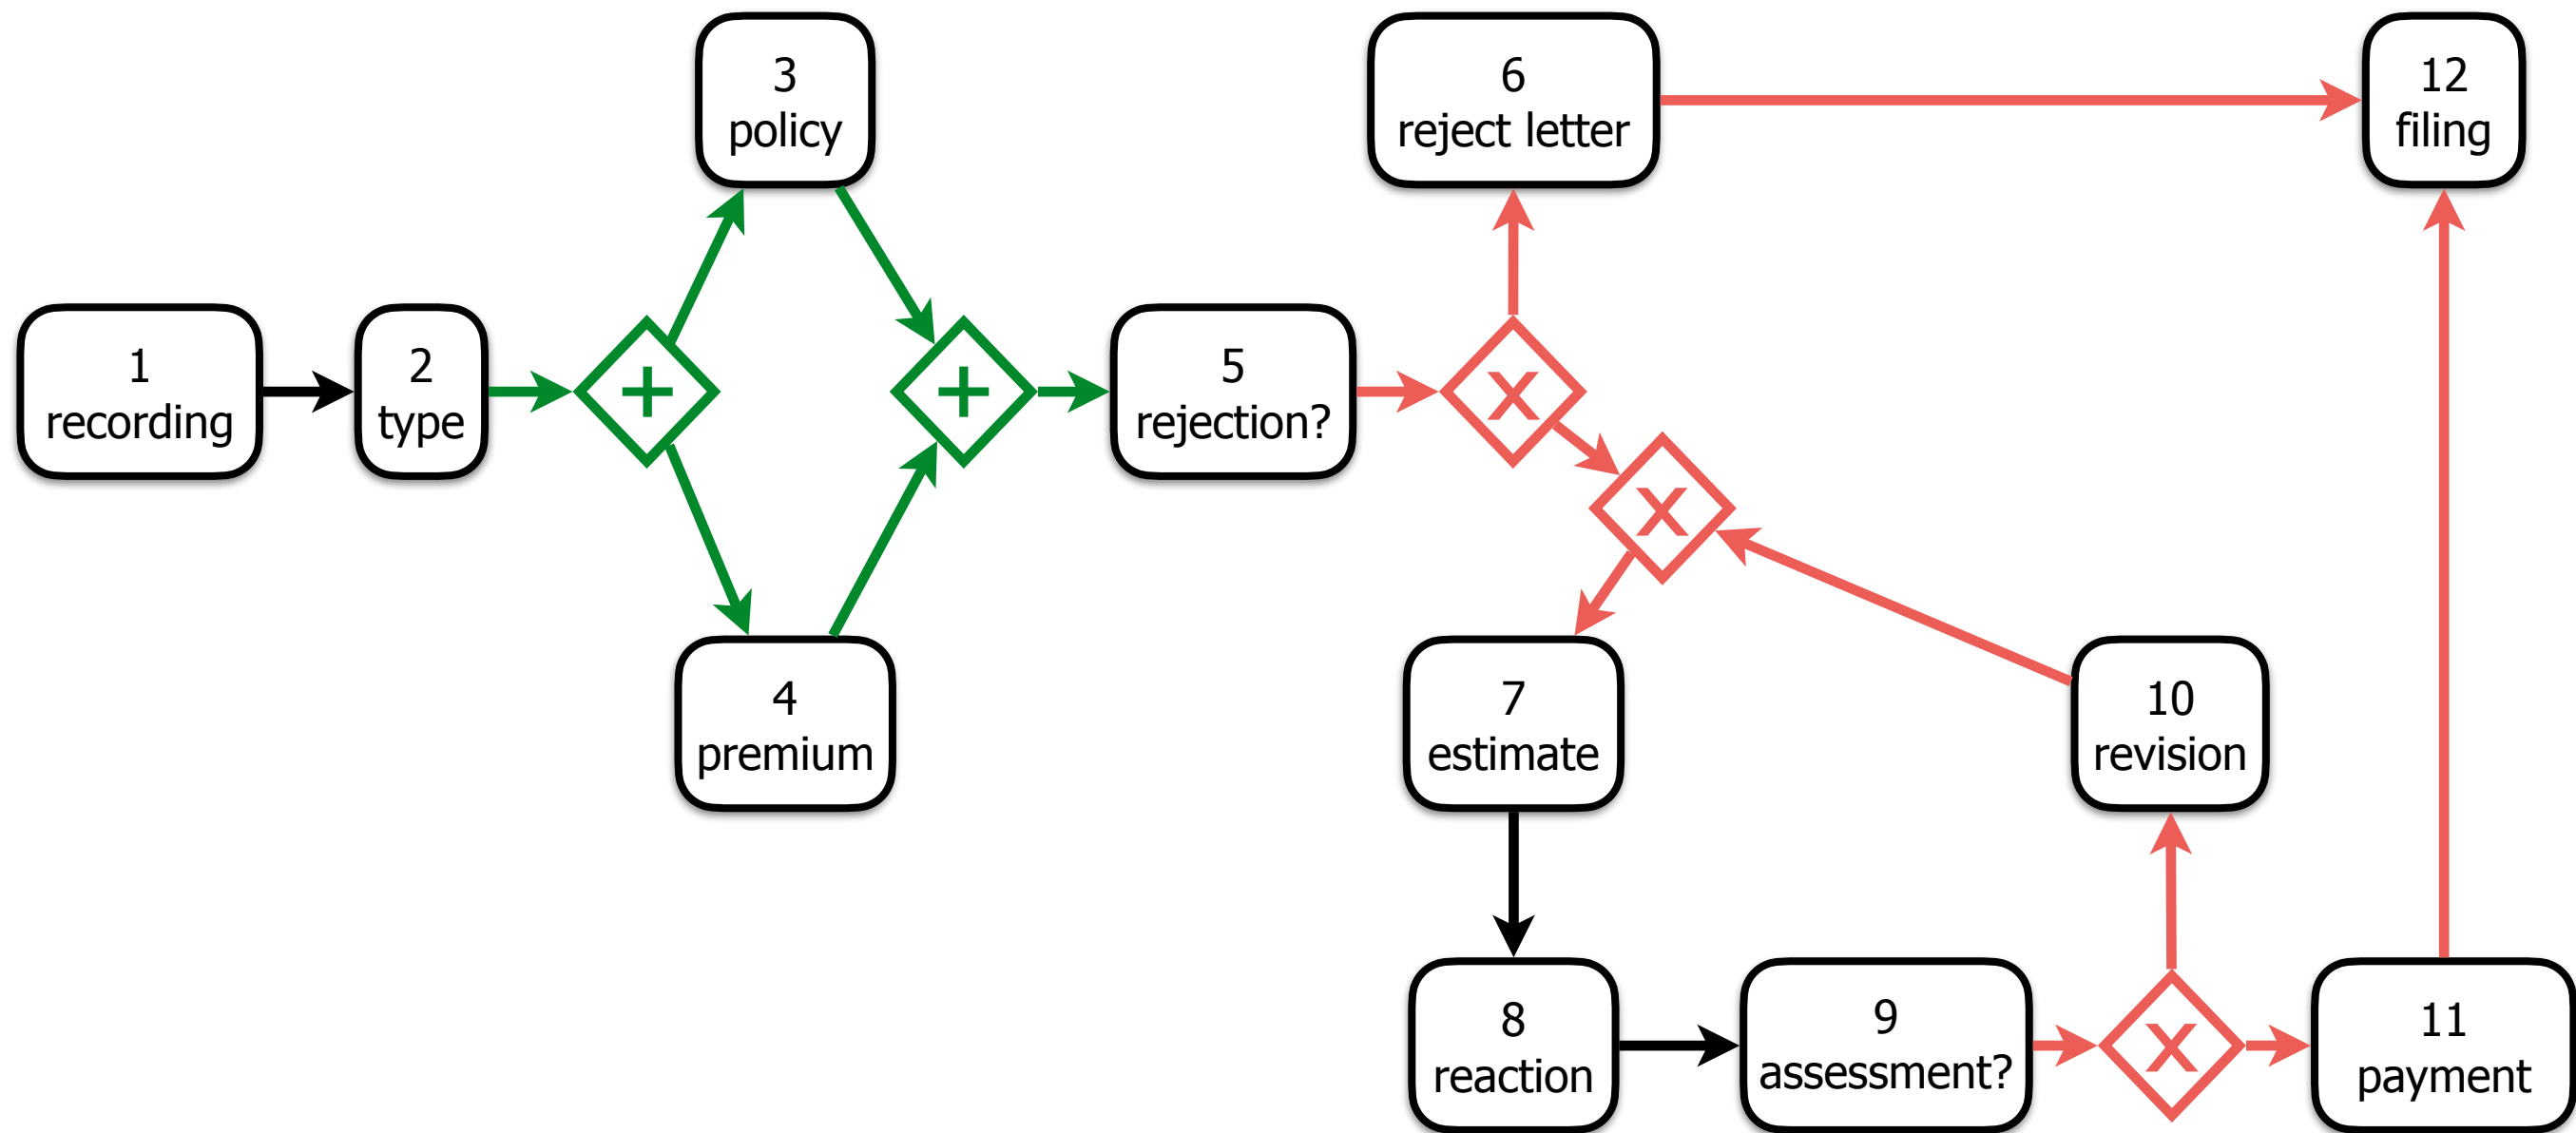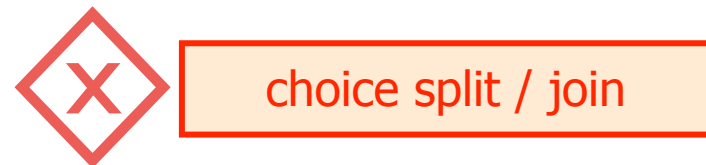

Disambiguation

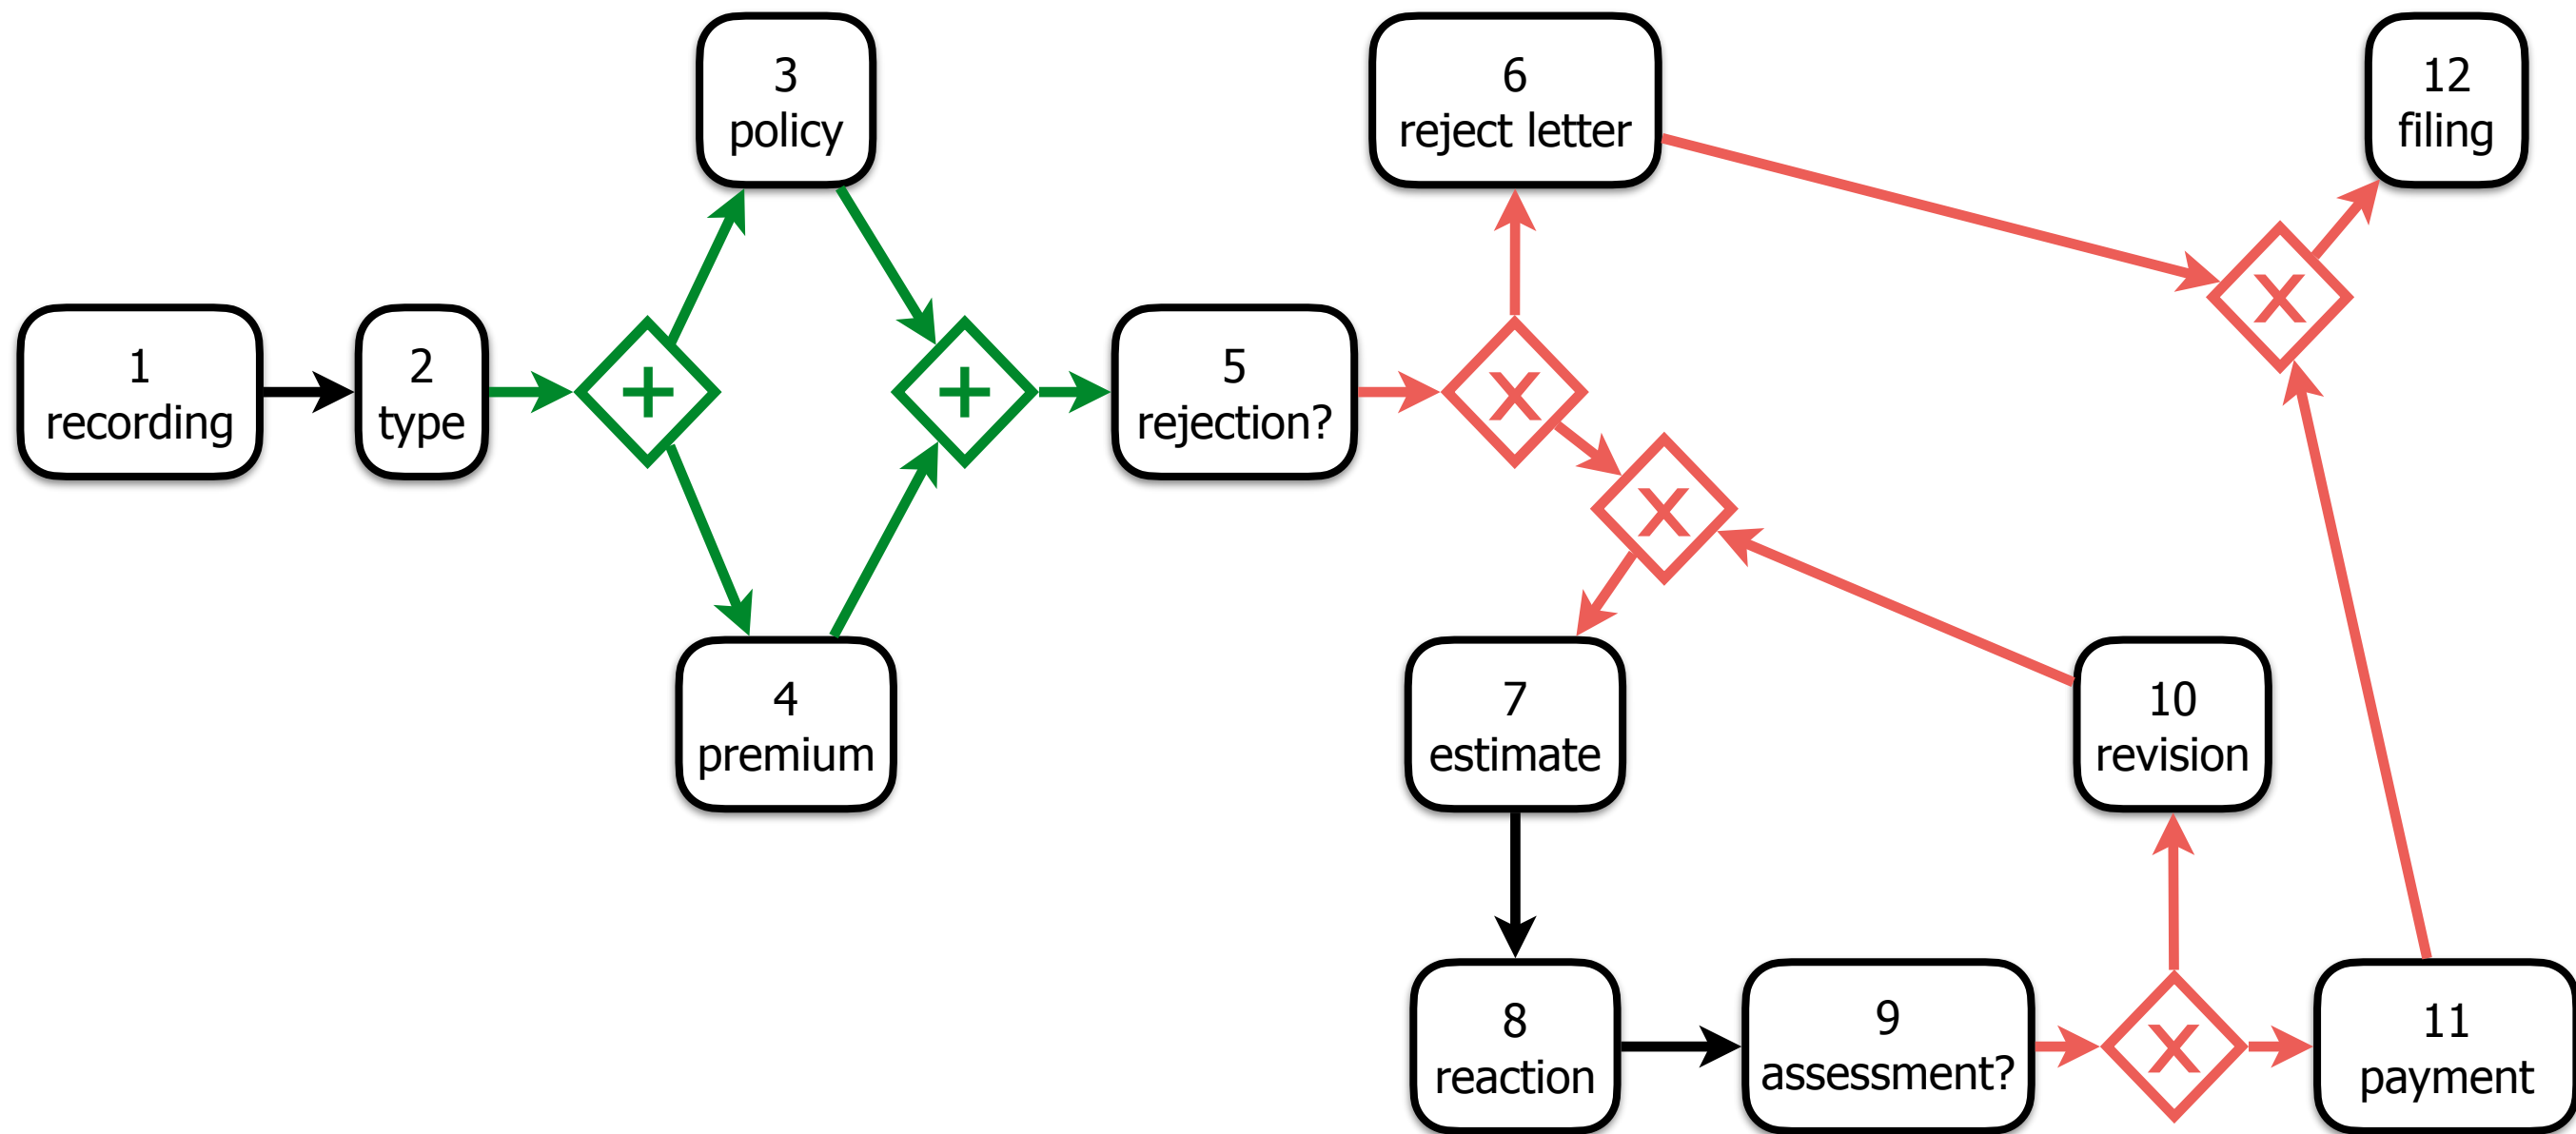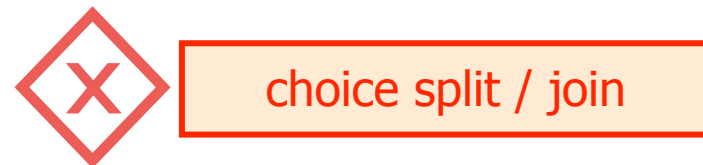


Disambiguation

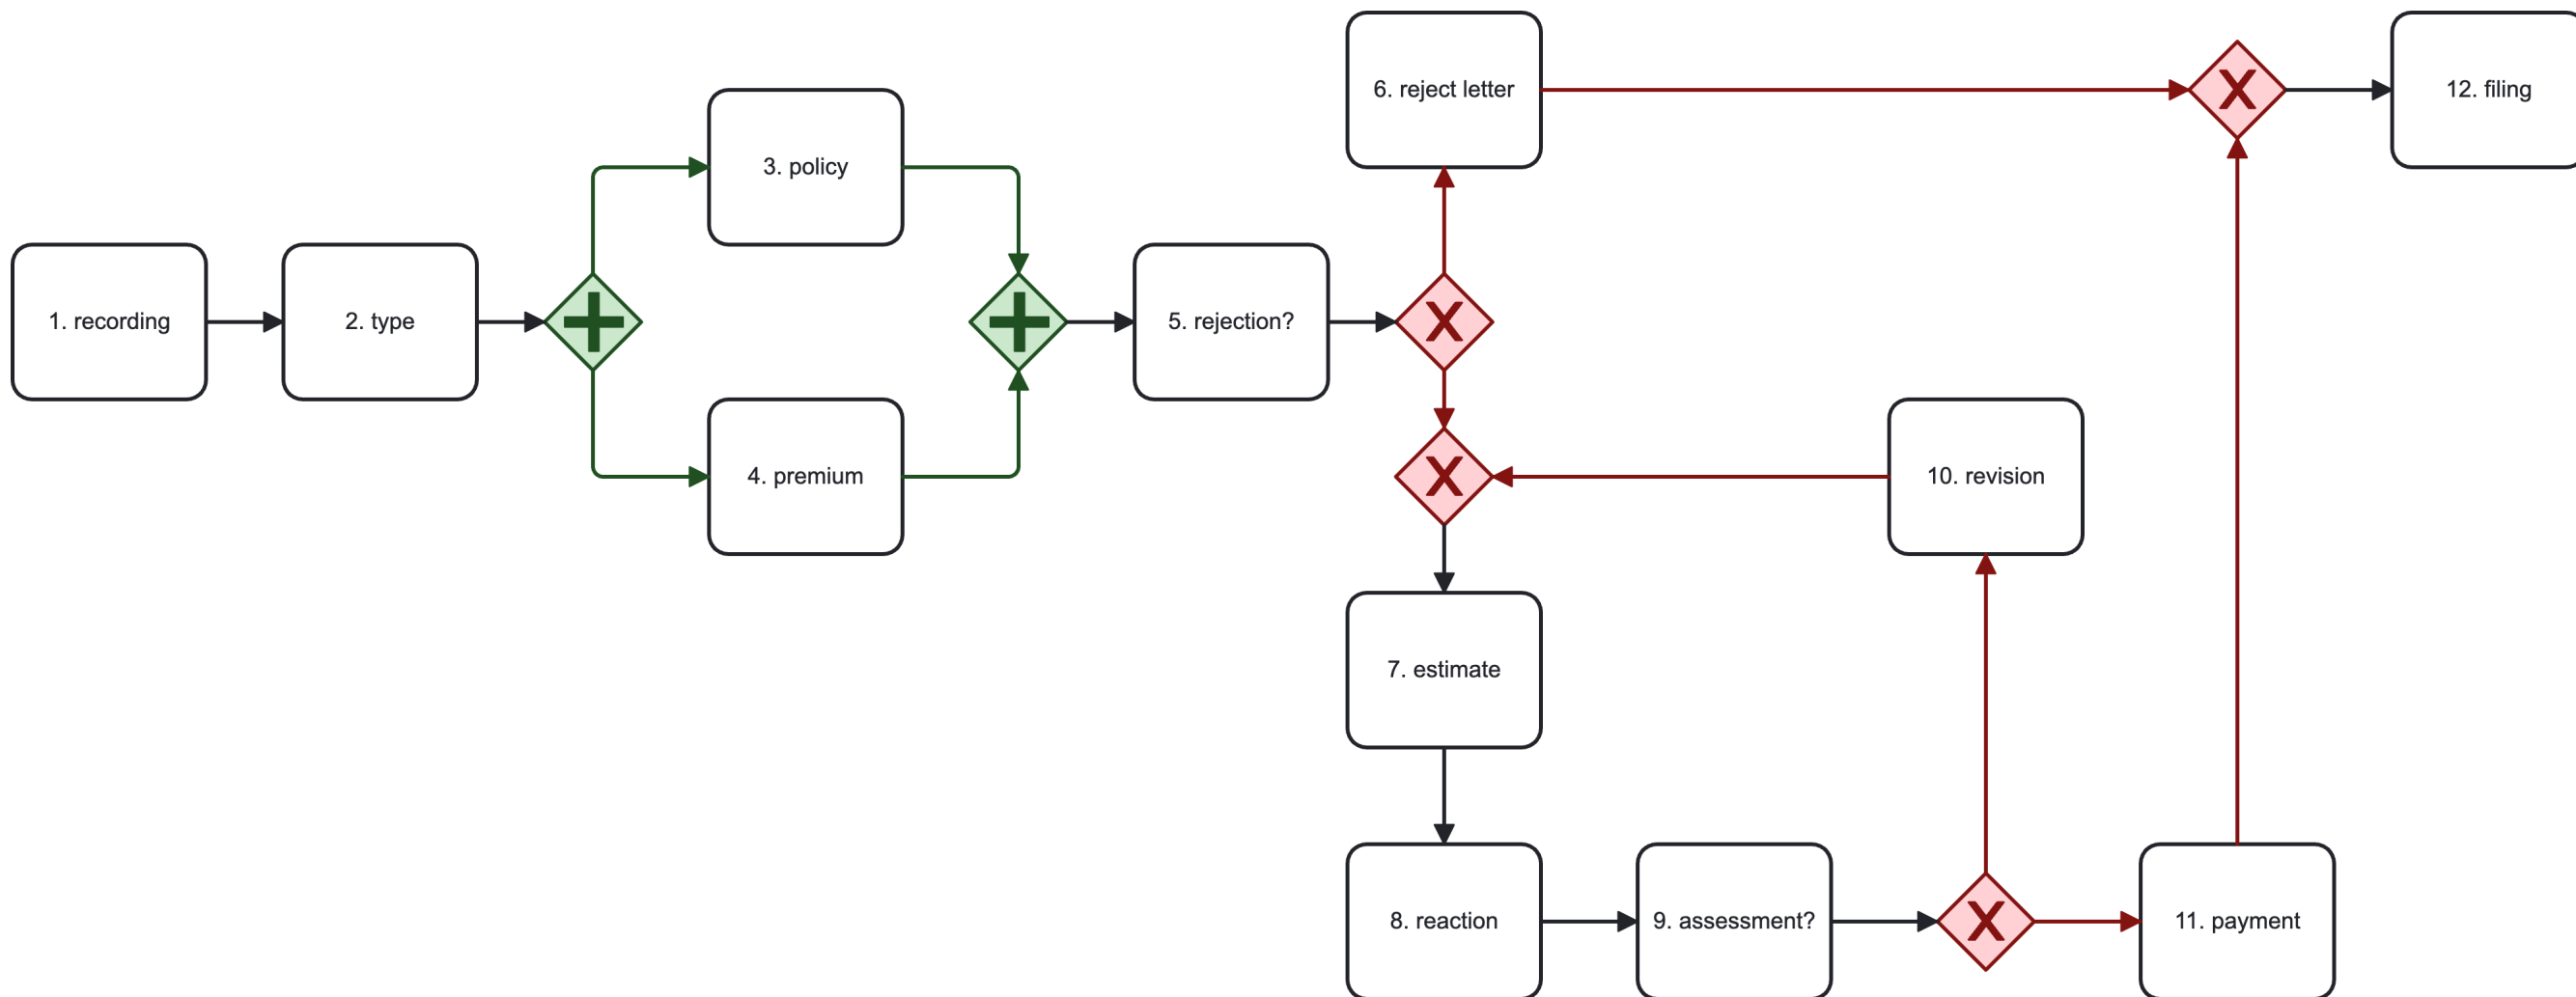


<https://camunda.com/download/modeler/>
<https://bpmn.io/>

Disambiguation

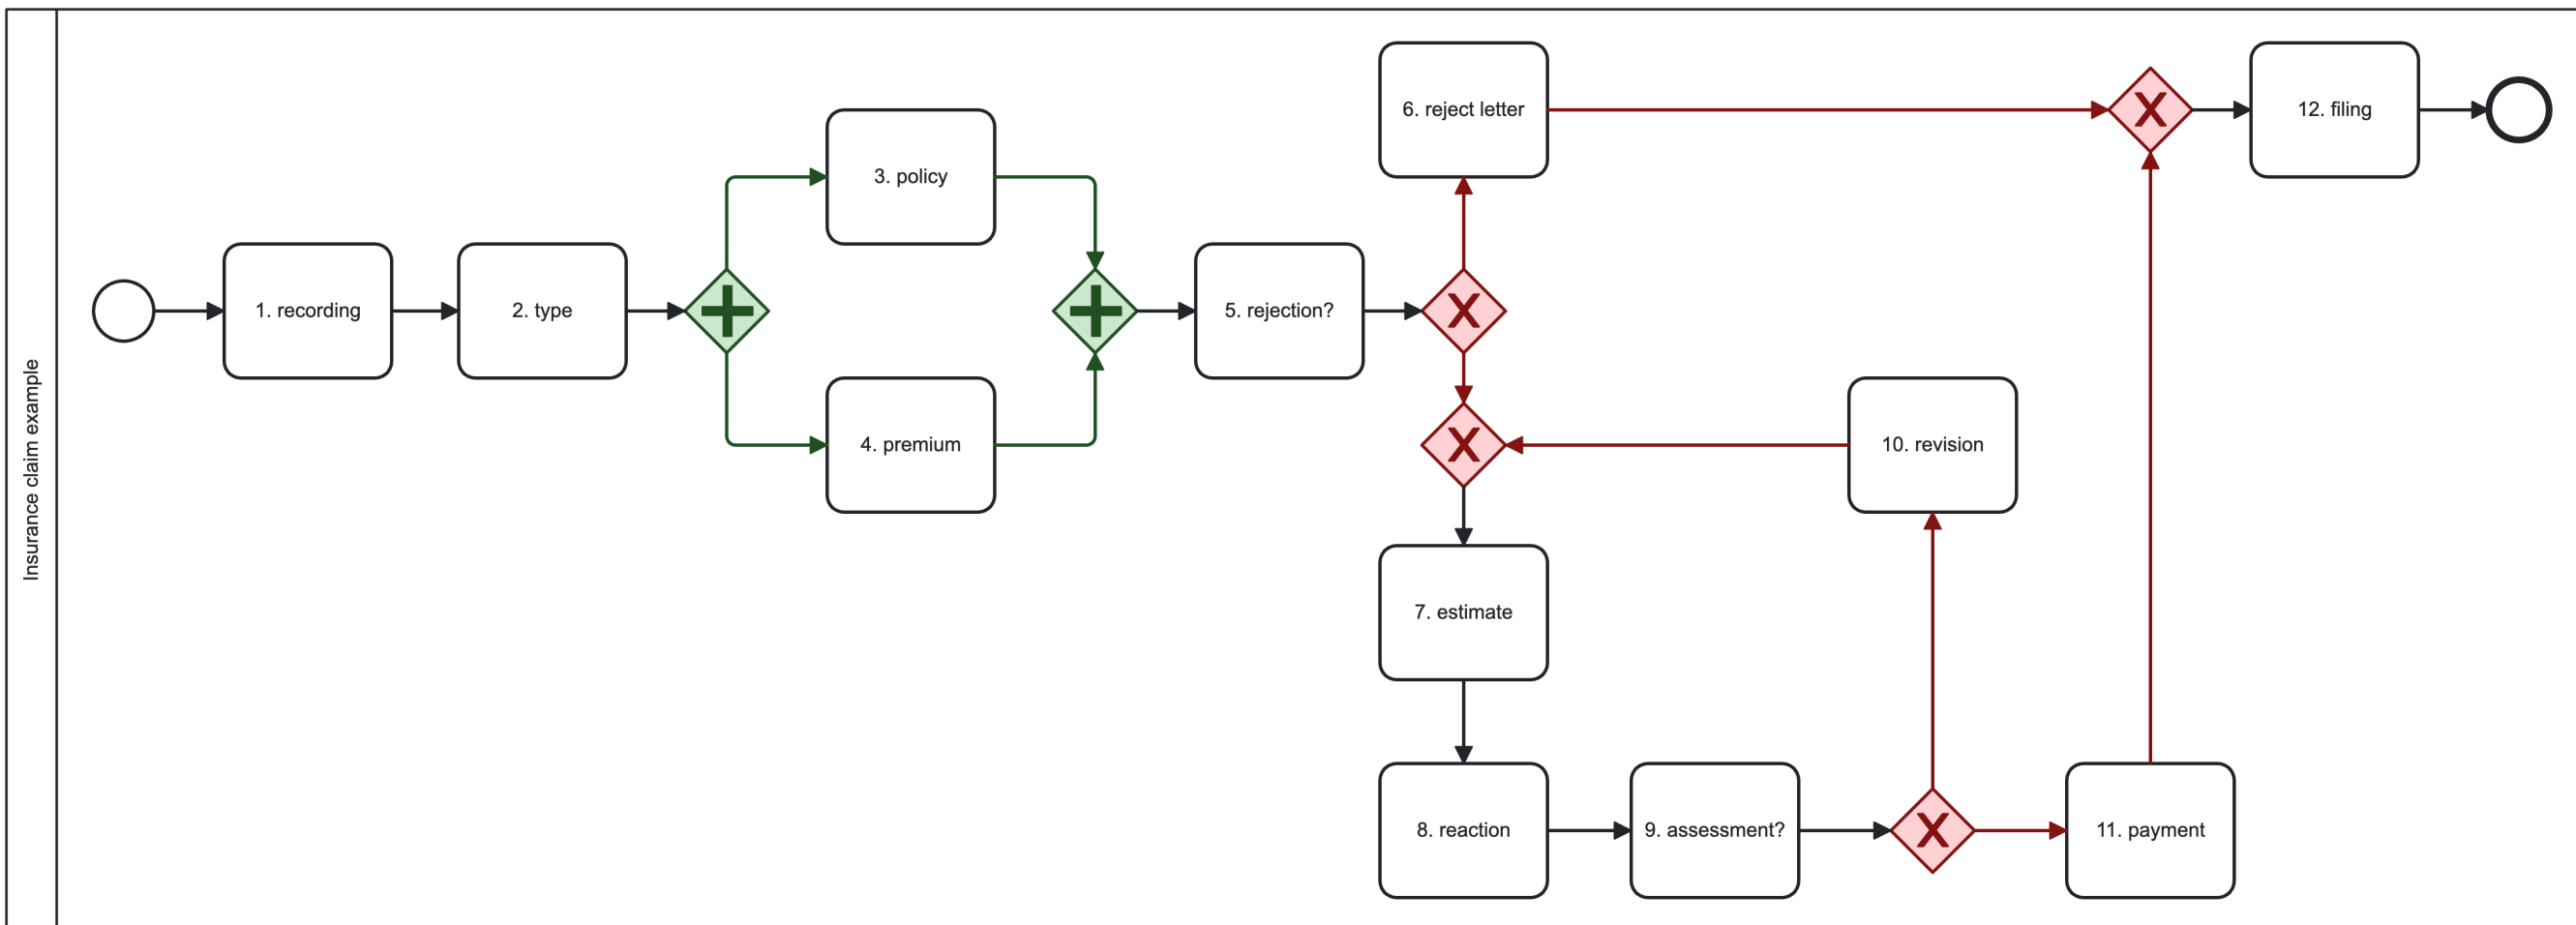



<https://camunda.com/download/modeler/>
<https://bpmn.io/>

Disambiguation (BPMN)

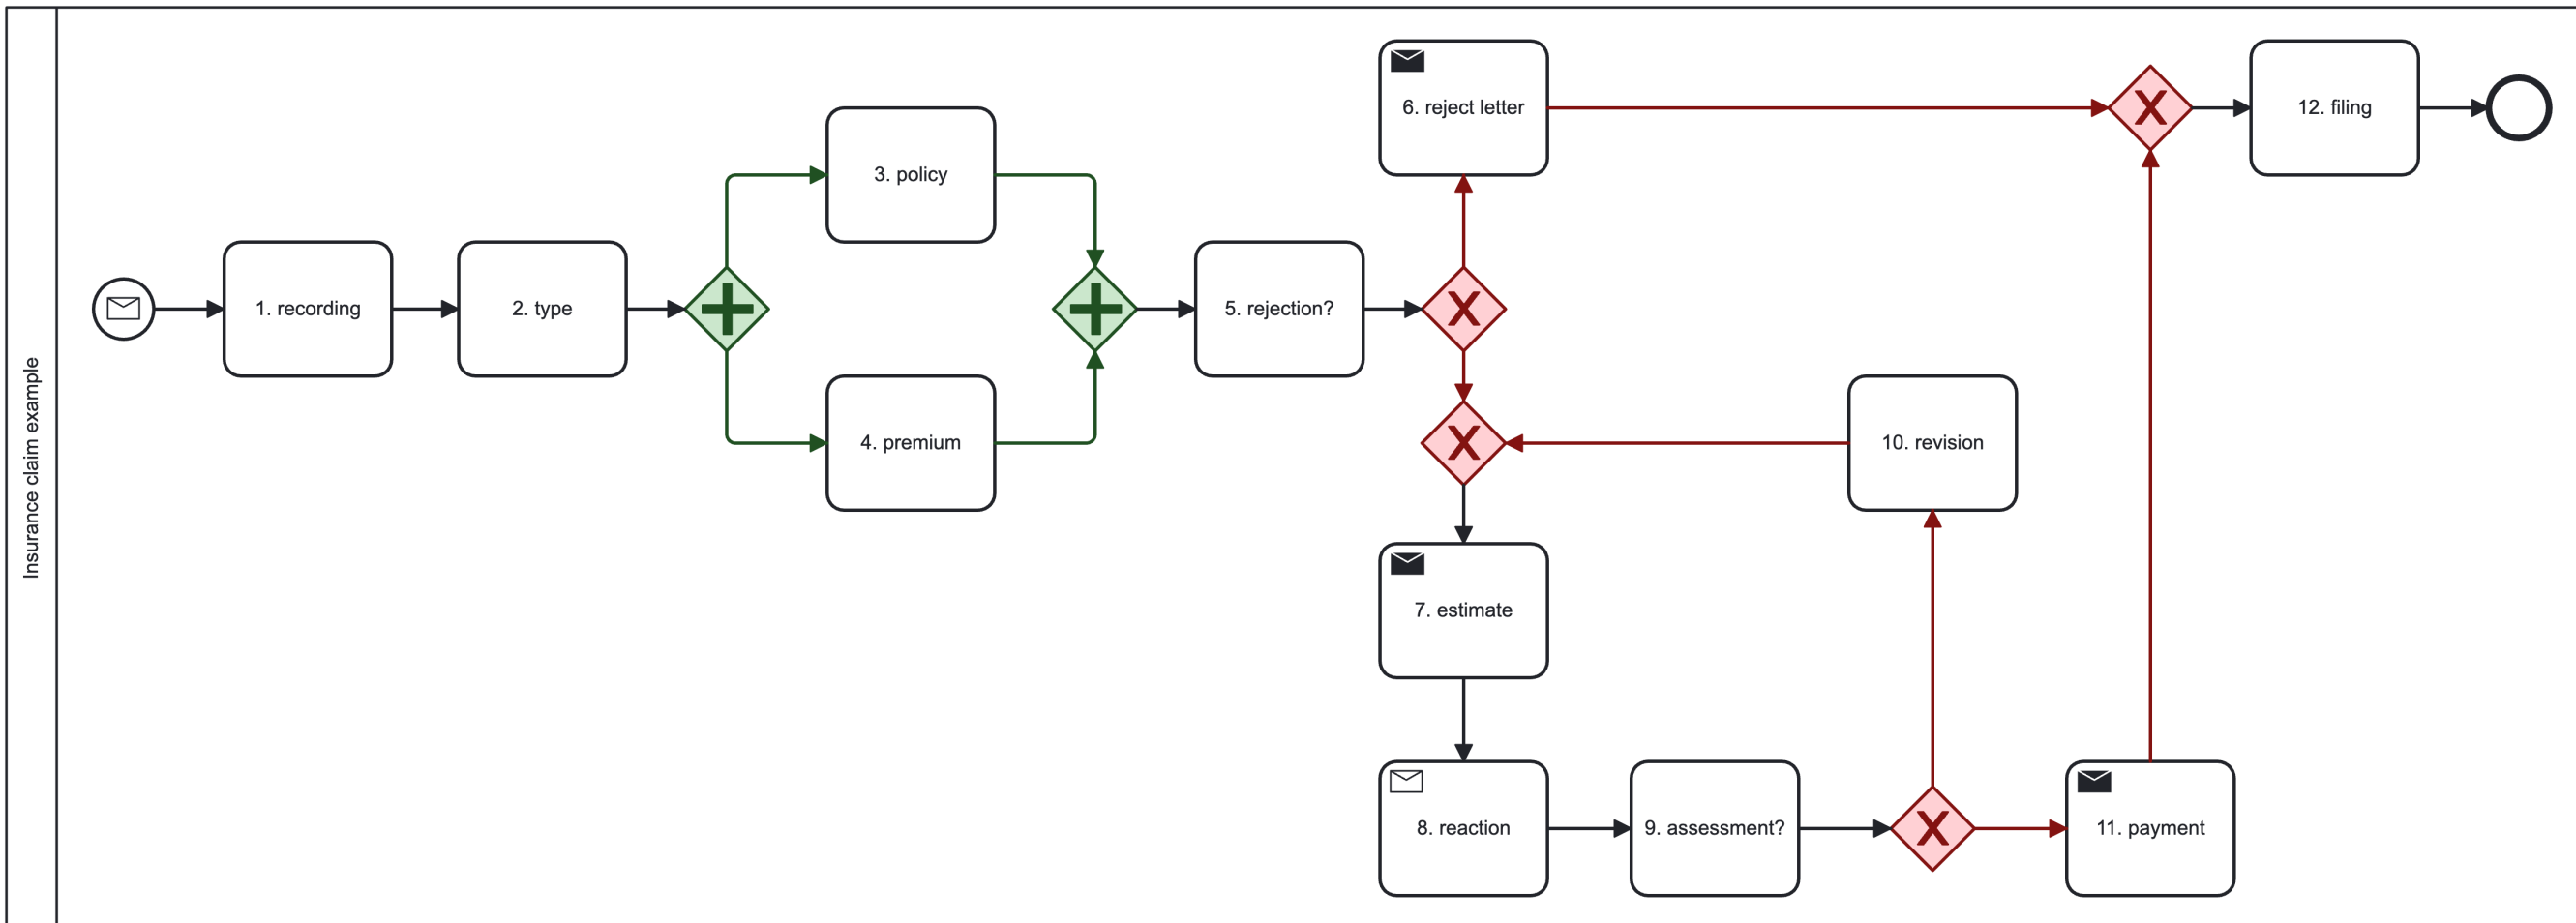

<https://camunda.com/download/modeler/>
<https://bpmn.io/>


EPC: example

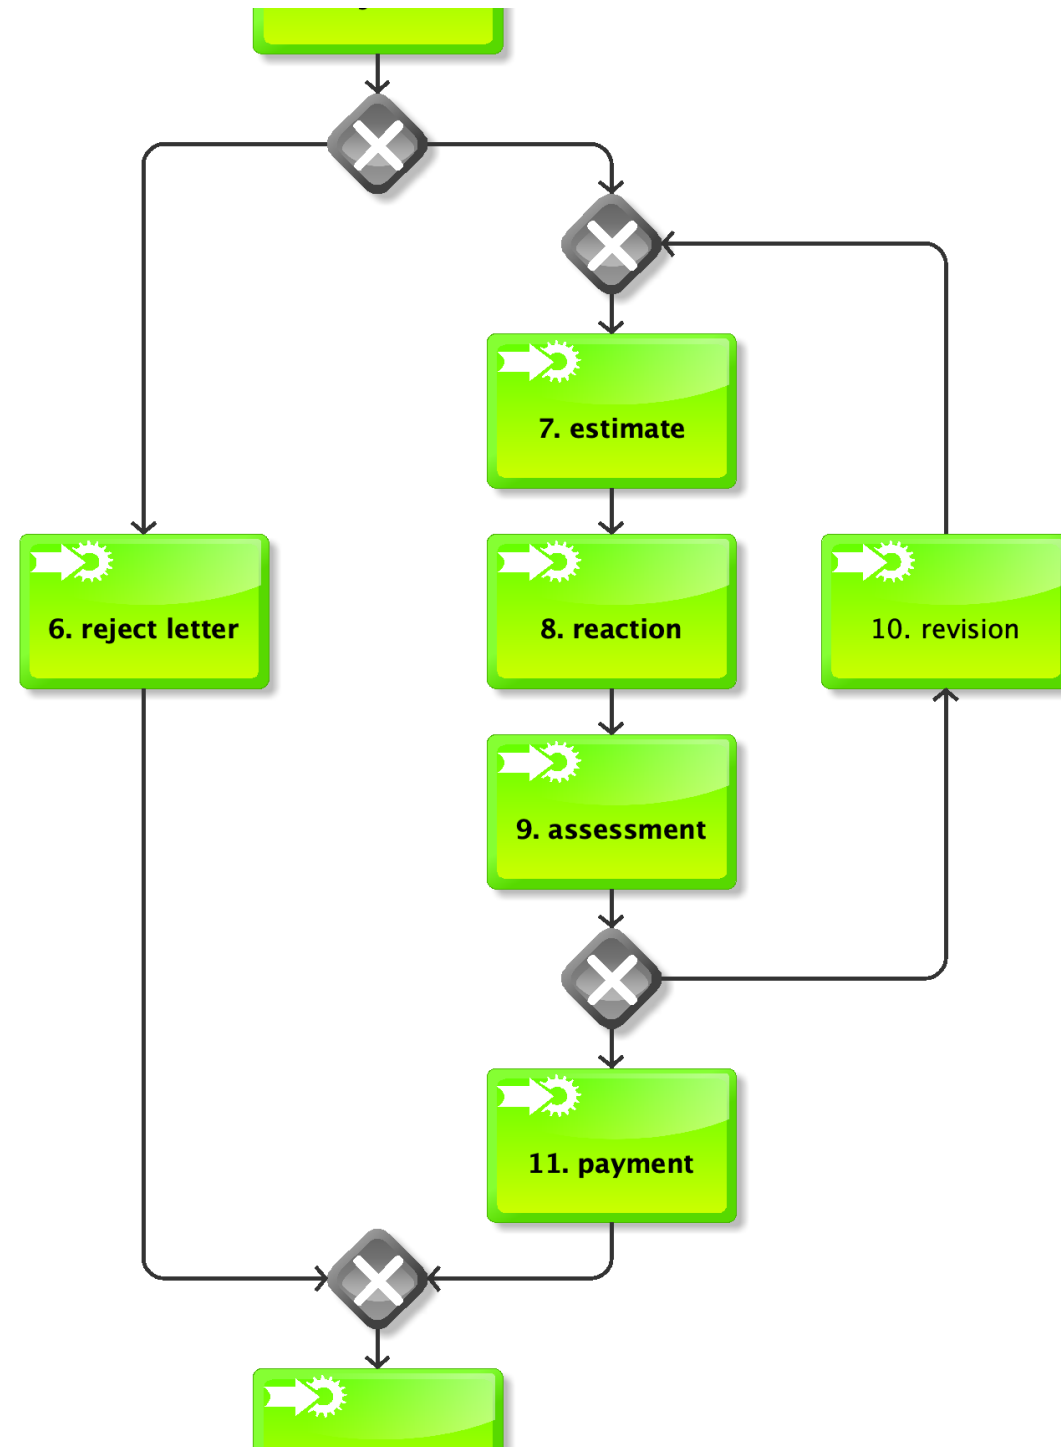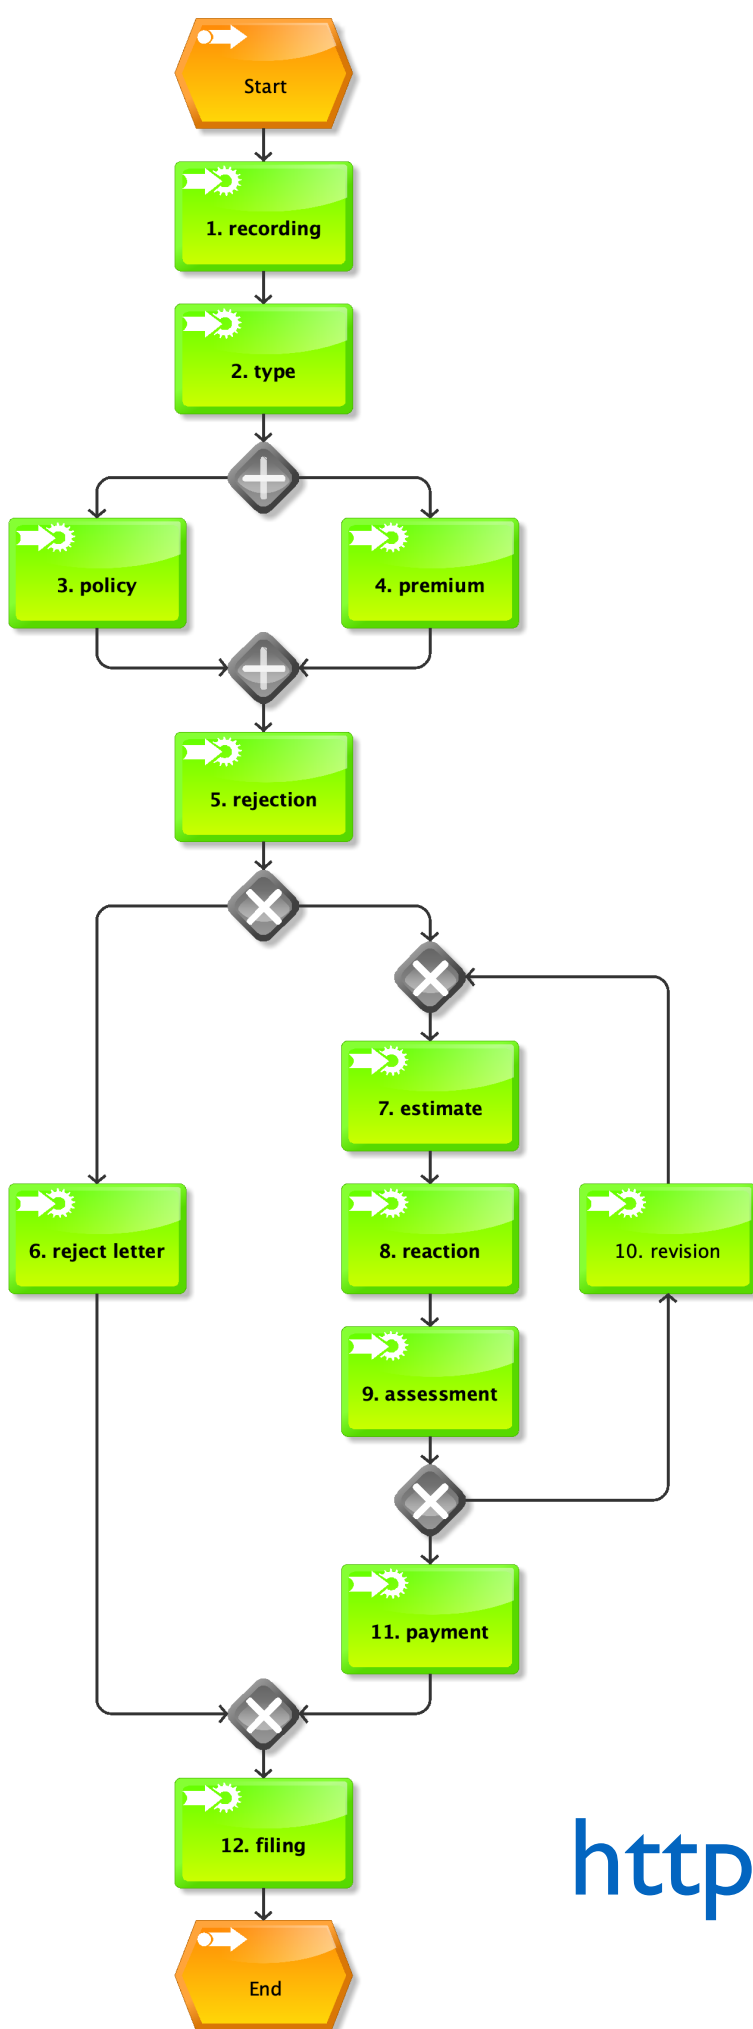

<https://ariscommunity.com/arisc-express>



Disambiguation (WfN)

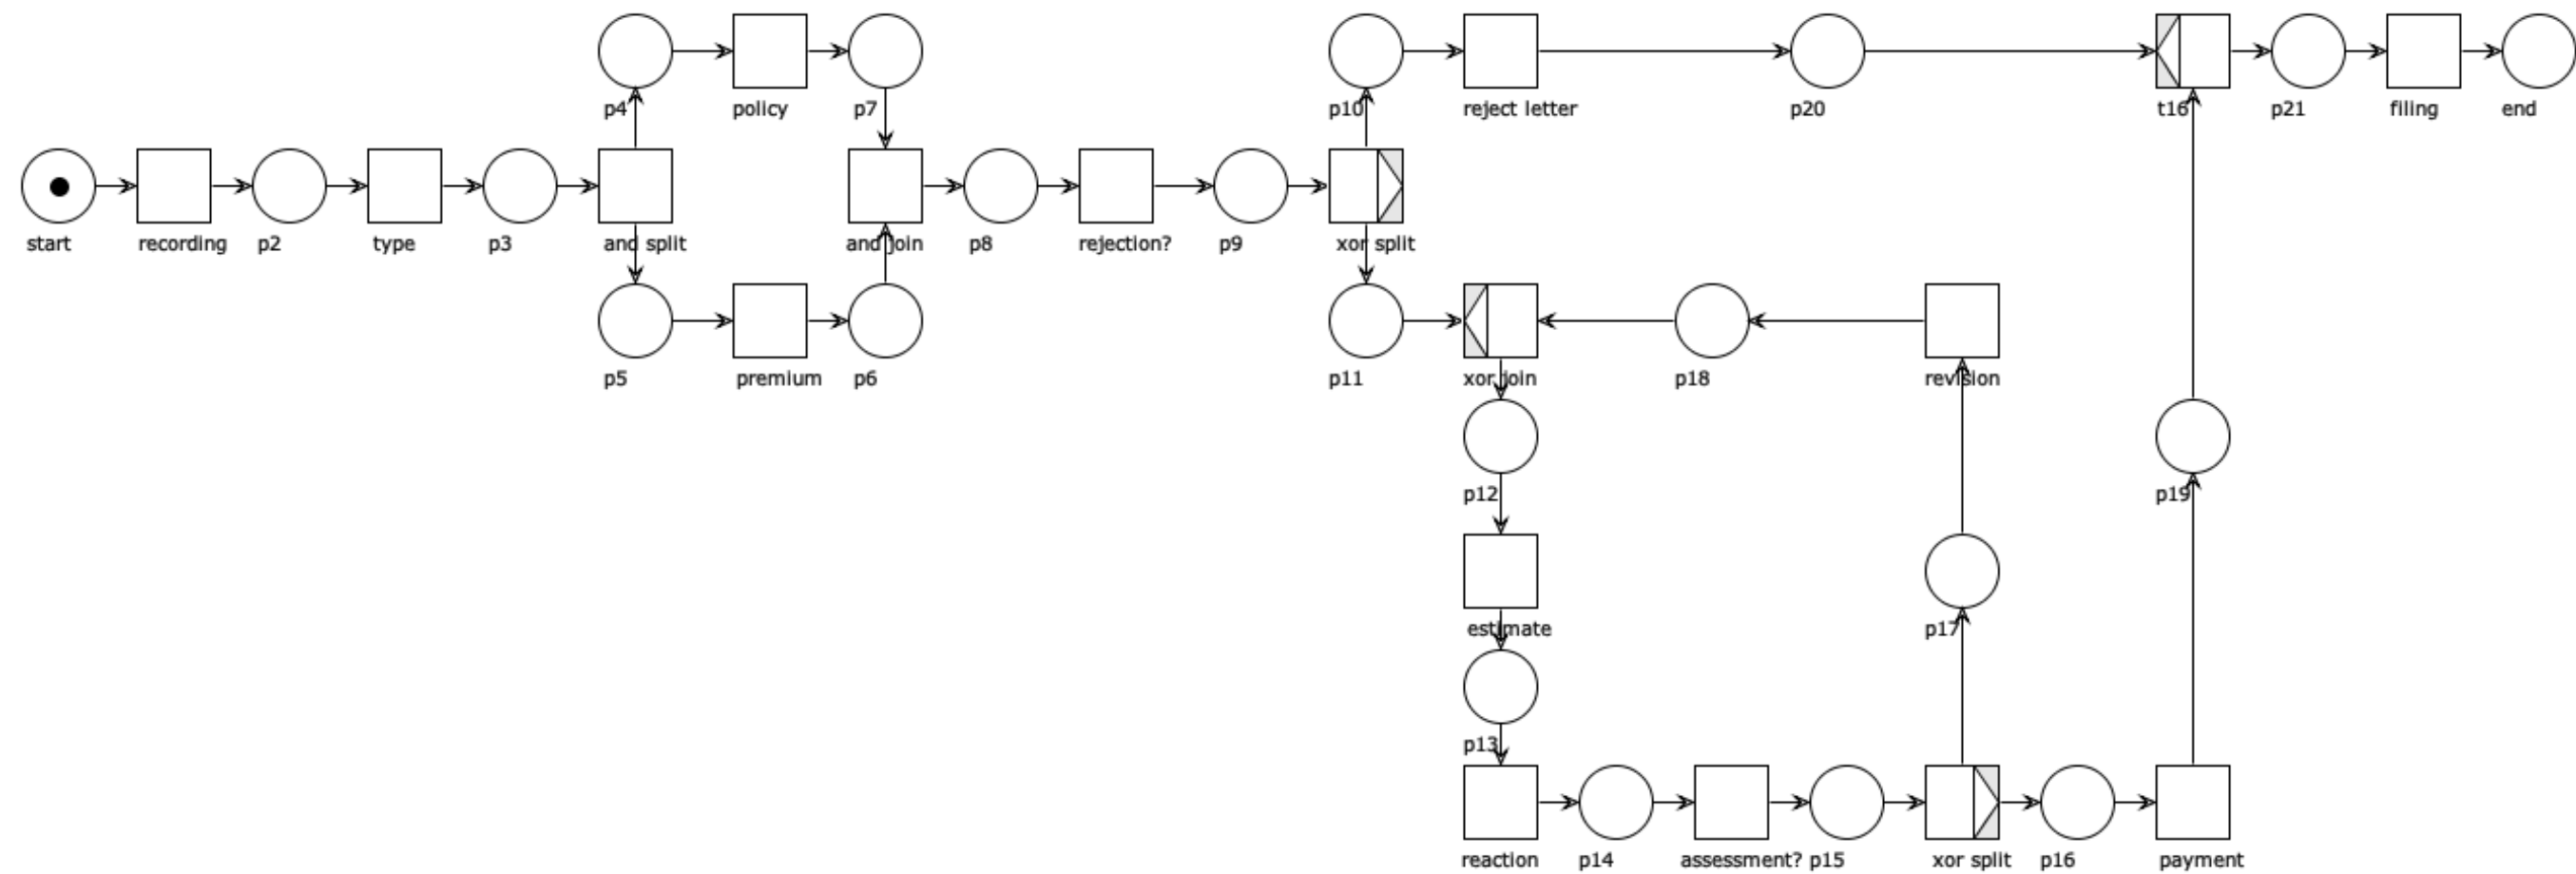


<http://woped.dhbw-karlsruhe.de/>

Ingredients

start / end	nodes
tasks	nodes
join & split: concurrency	nodes
join & split: internal decisions	nodes
split: external decisions	nodes
links: causal and temporal dependencies	edges
responsibility: whole process / single tasks	?
information: data, parameters, ...	?
platform: bindings, services, ports, ...	?

Let's invent our own notation

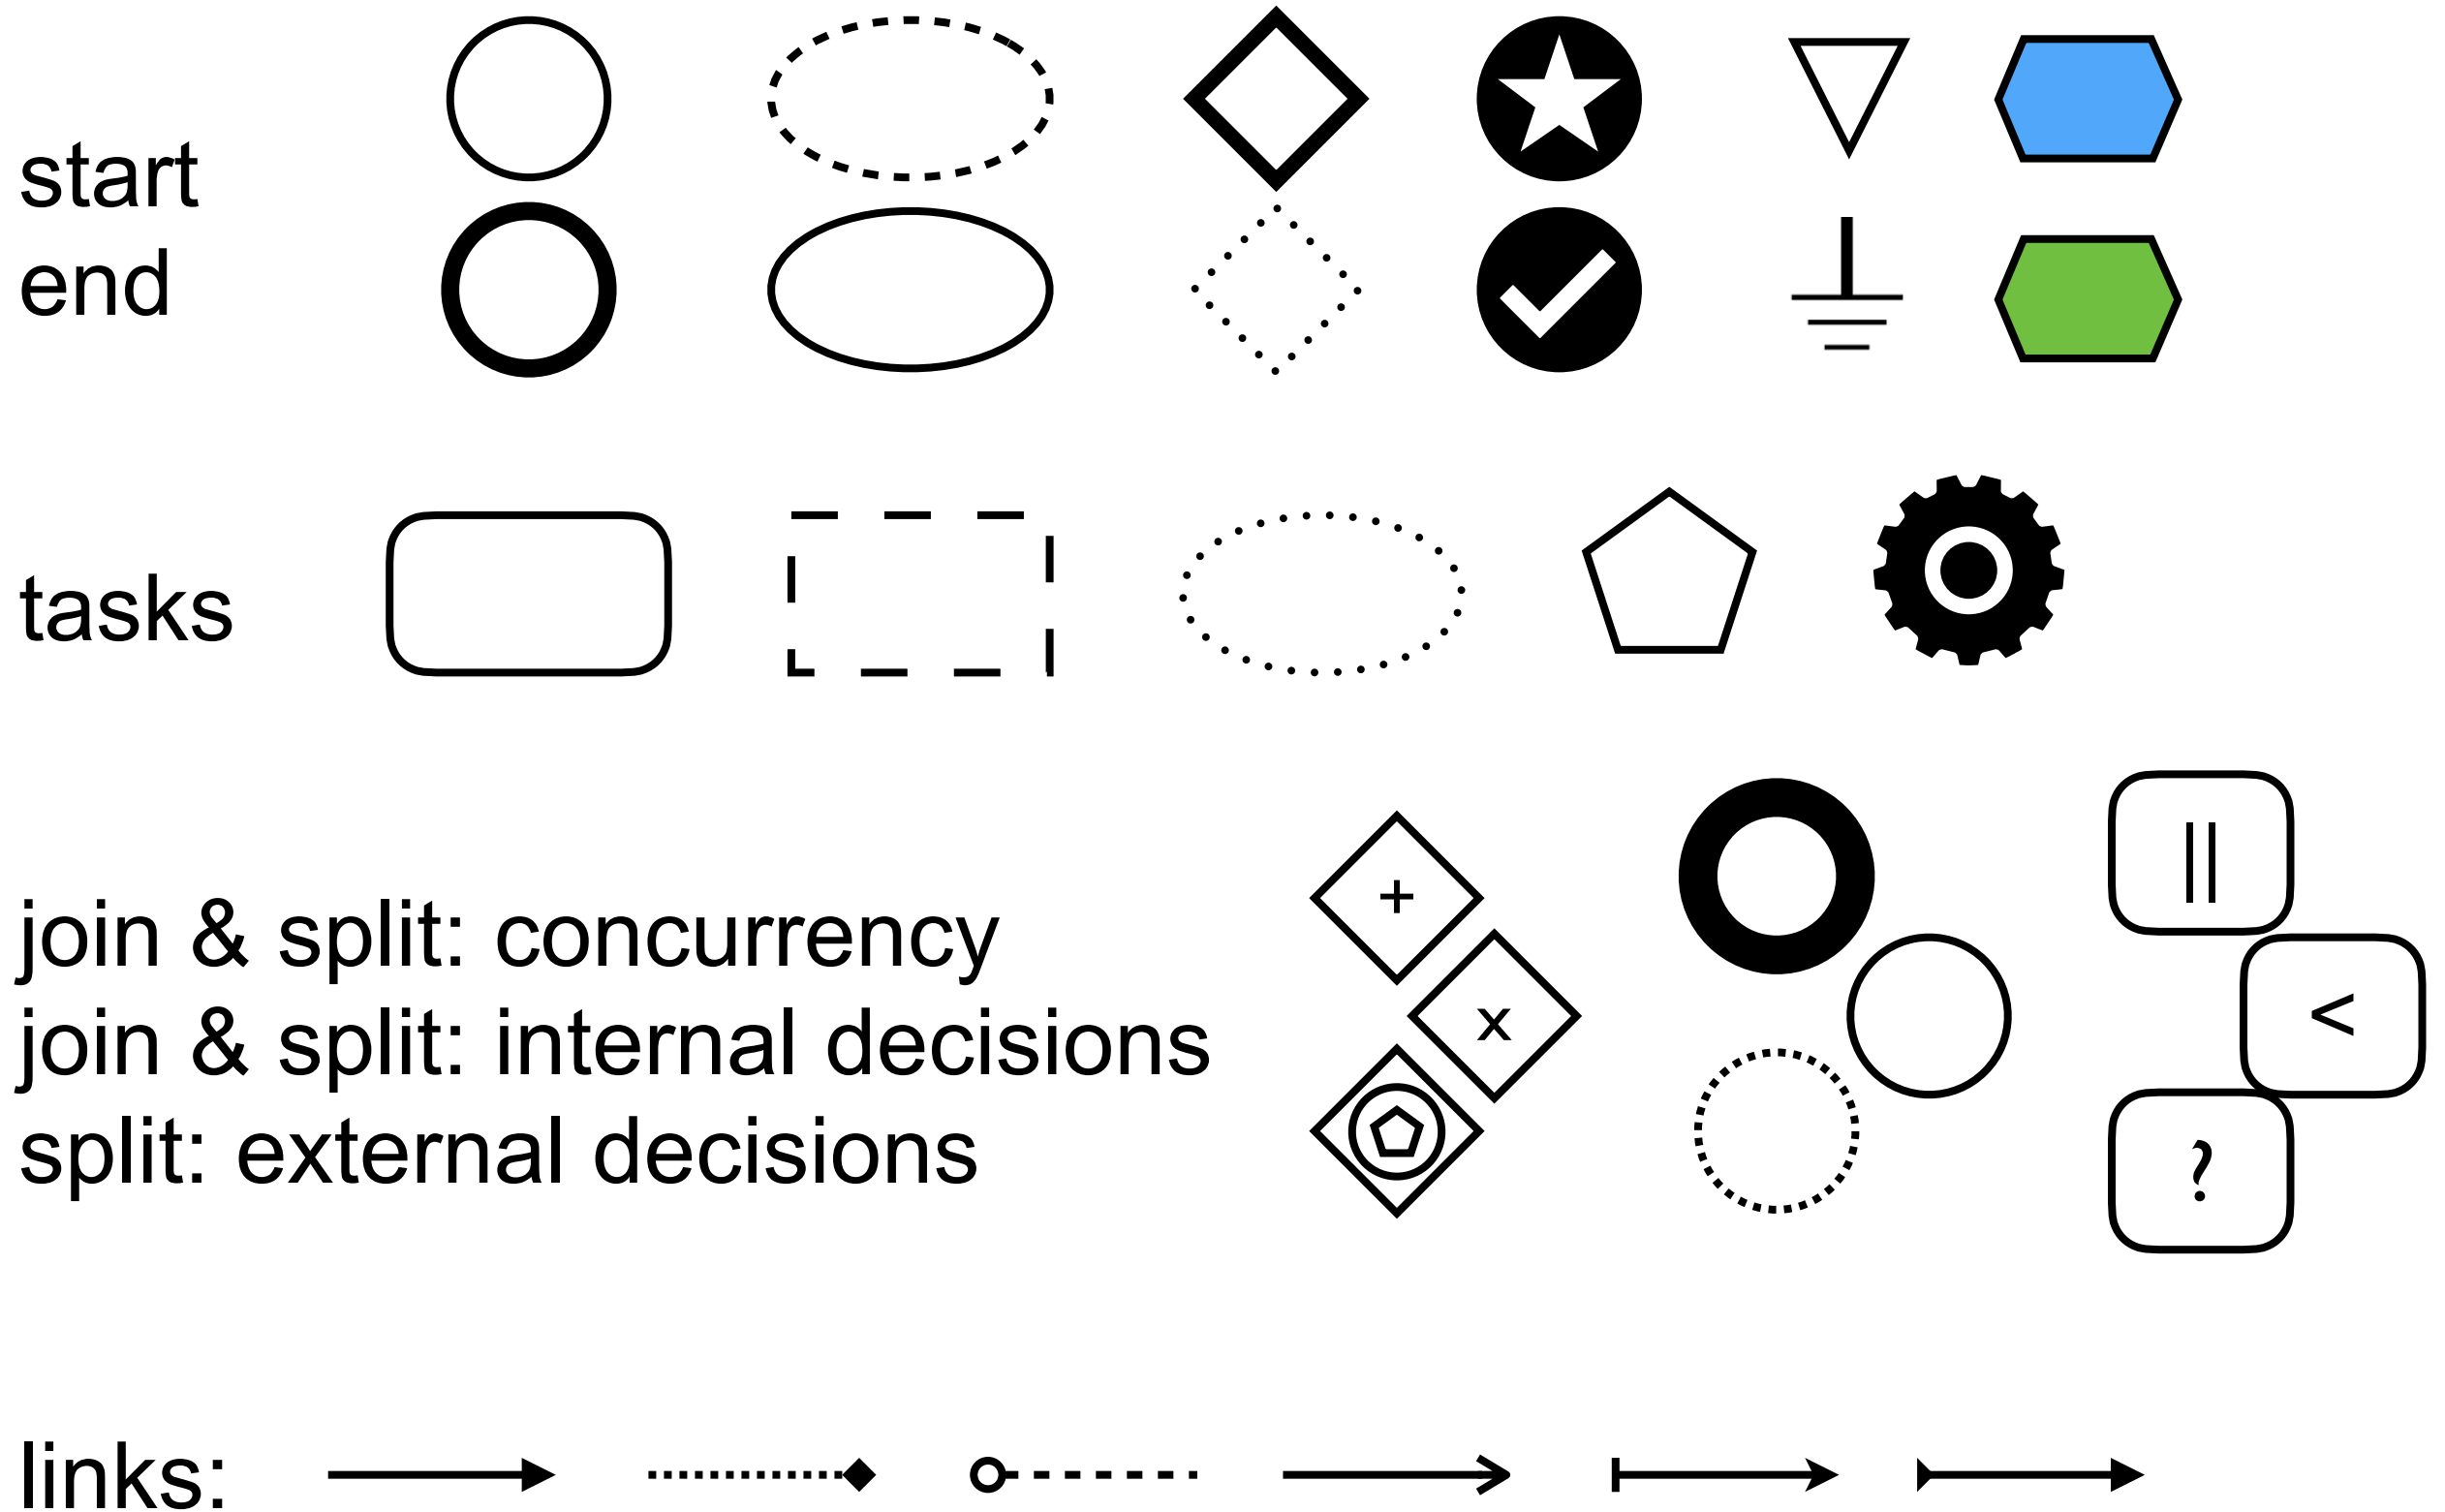

It is your turn

Exercise

Invent your own diagrammatic notation to describe the following interaction protocol (choose symbols, shapes, colours carefully)

Alice wants to sell her car, Bob is interested in buying it.

Alice asks some quote.

Bob can accept the bargain, refuse it or make a counteroffer.


Alice can accept or make a counteroffer and so on,

Until either the bargain is accepted or refused.

Send your solutions to: bruni@di.unipi.it


Your diagrams


Some past diagrams

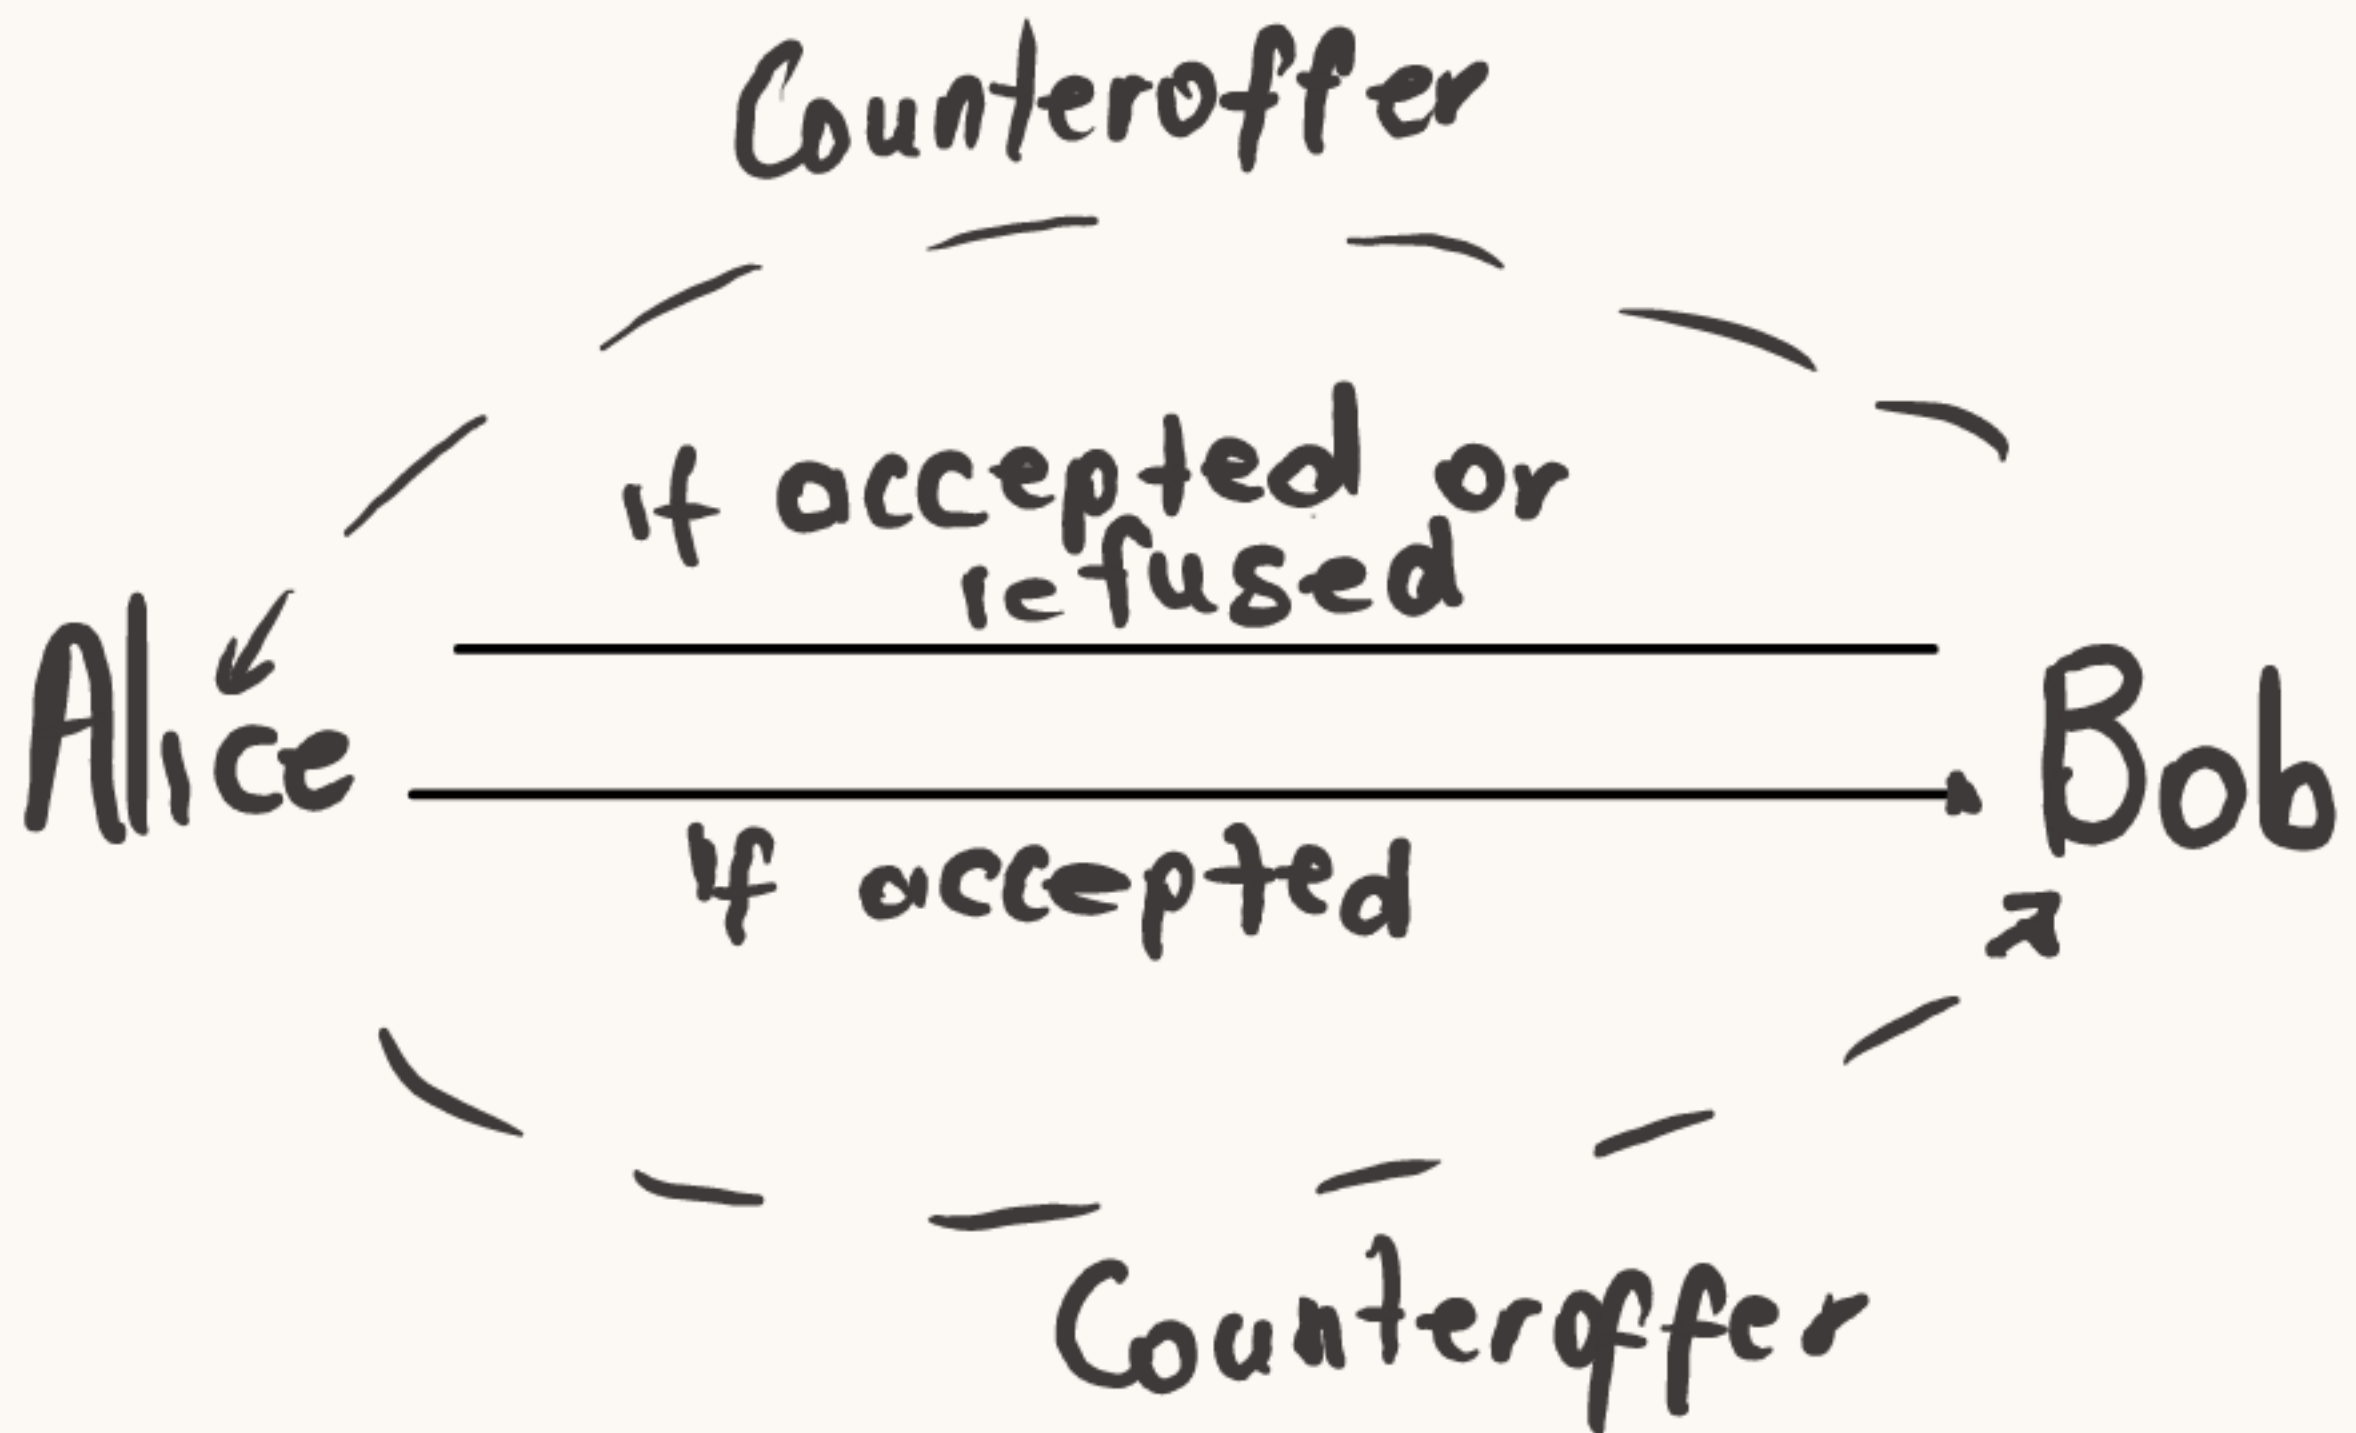



Alice


Bob

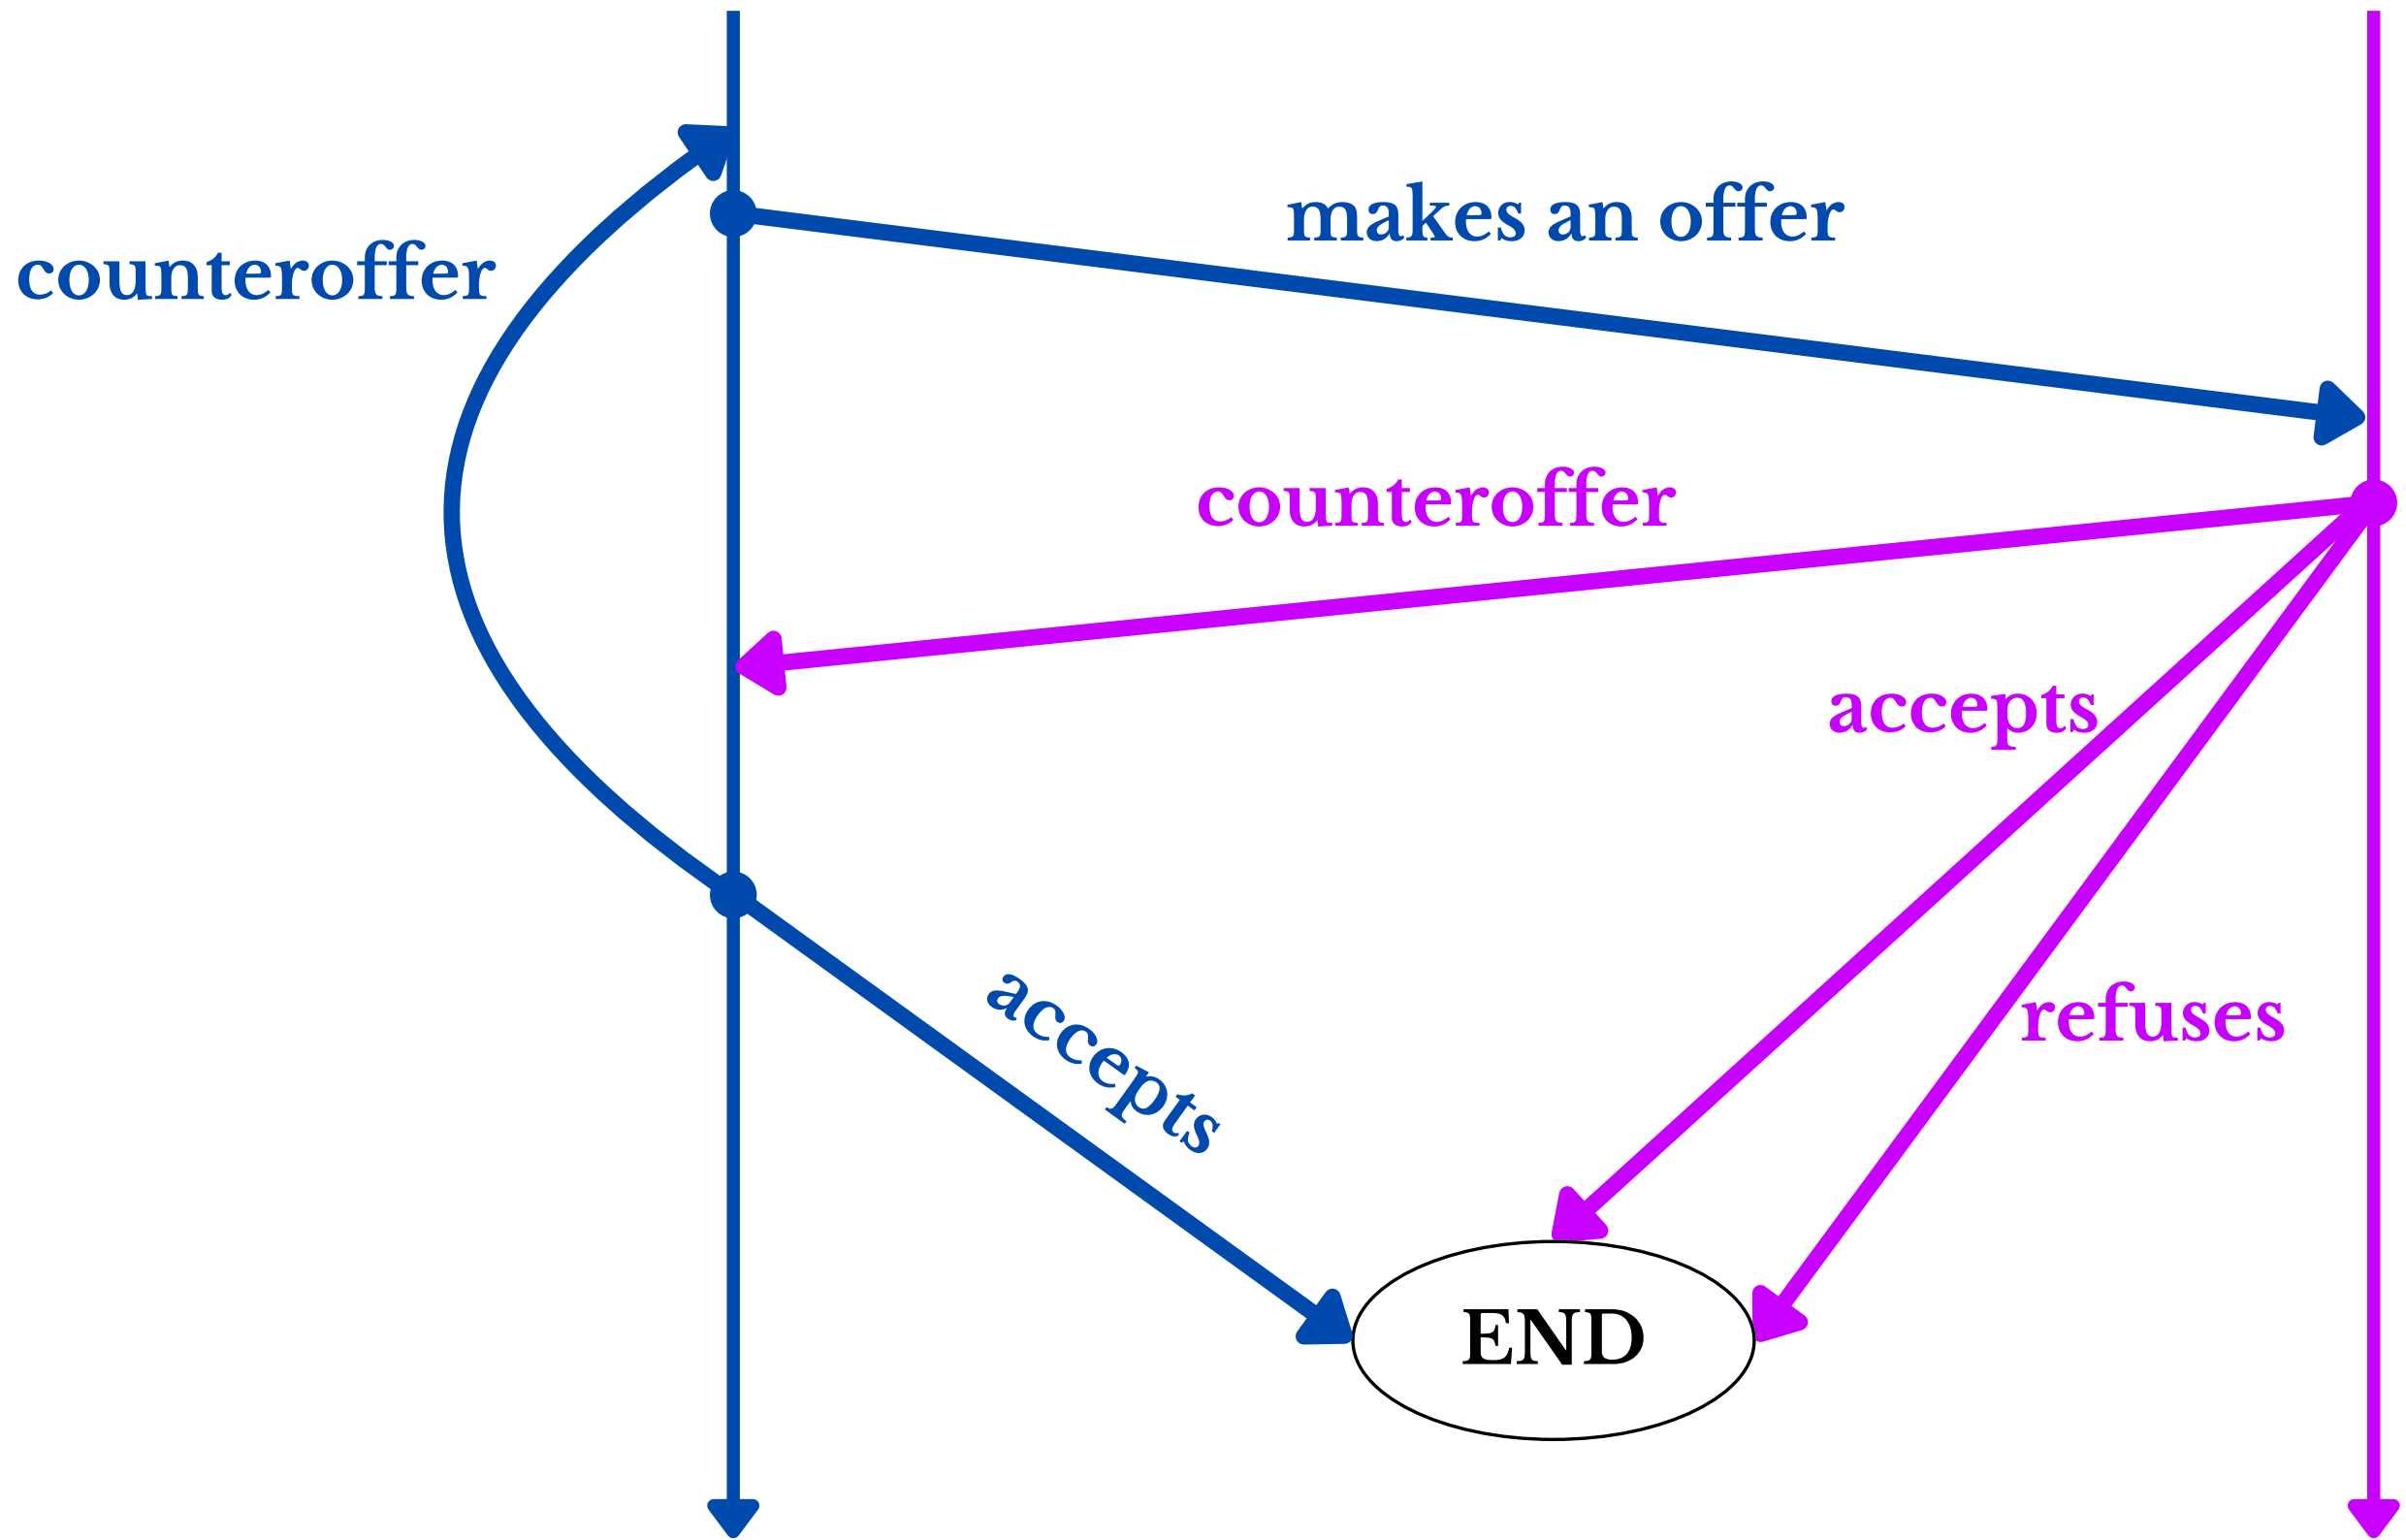

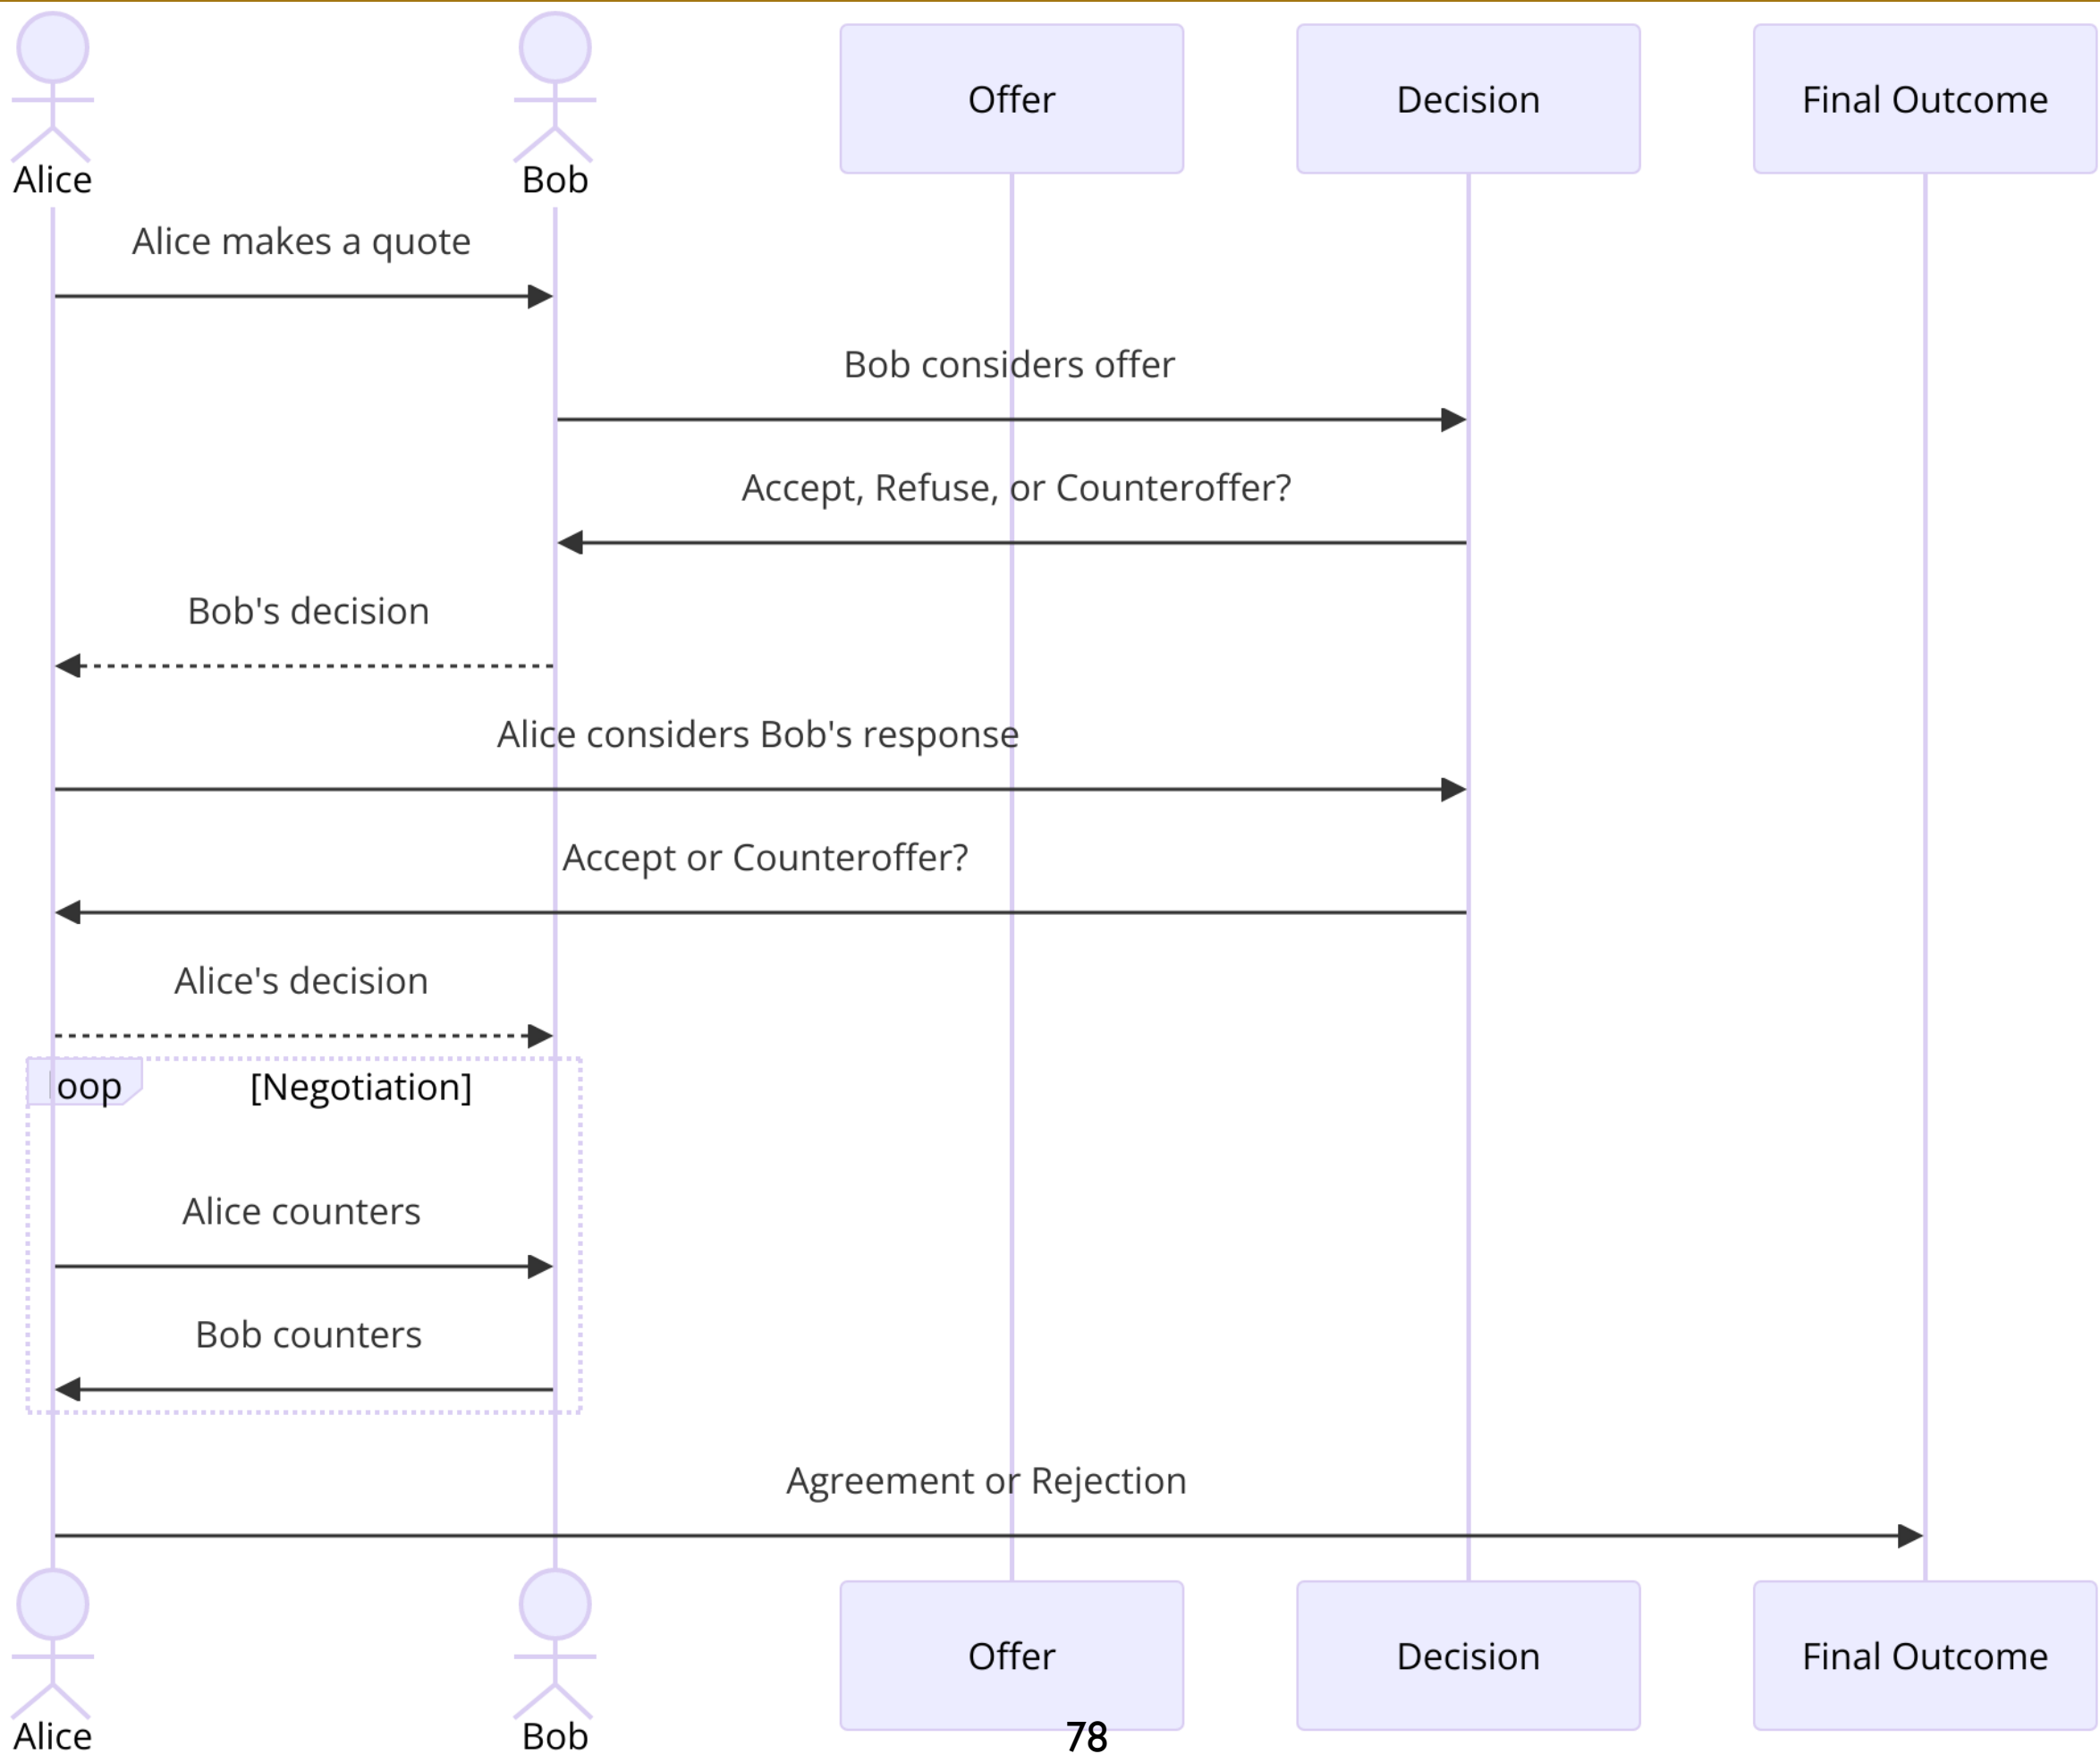


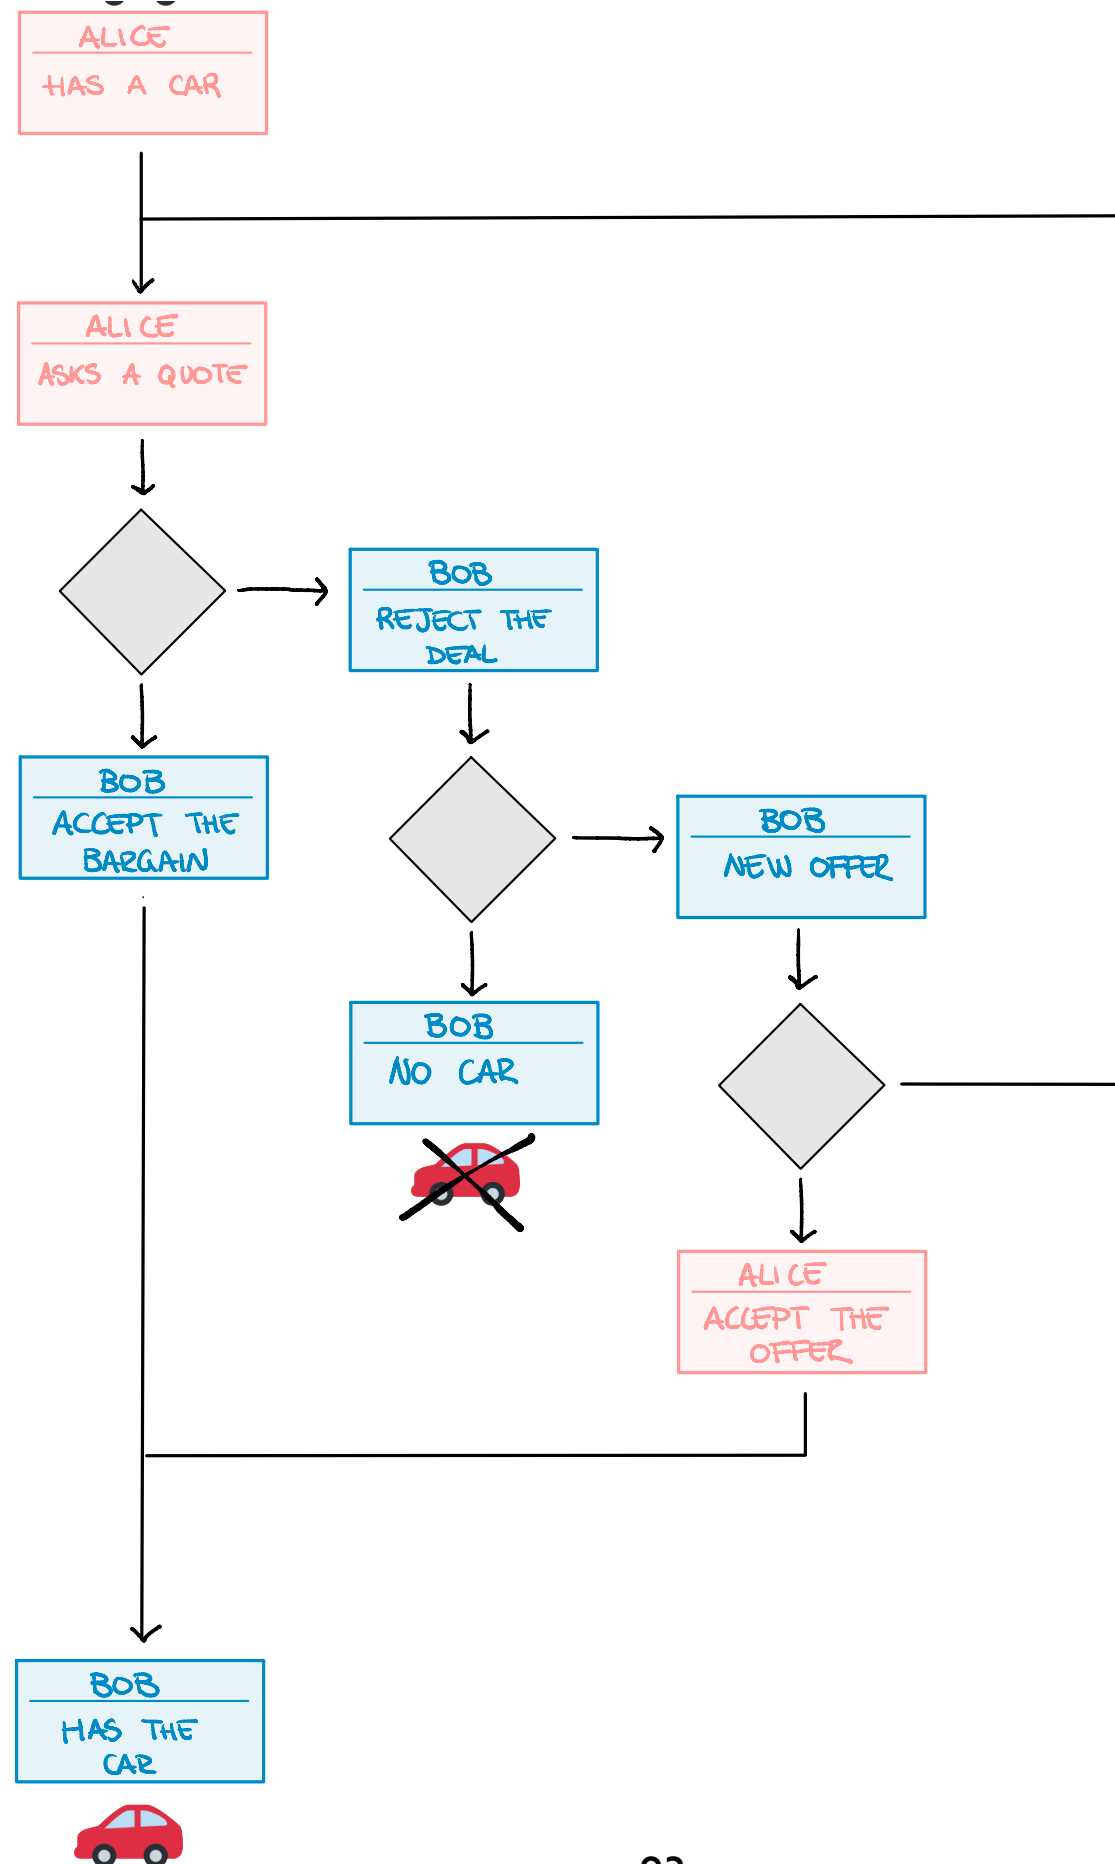

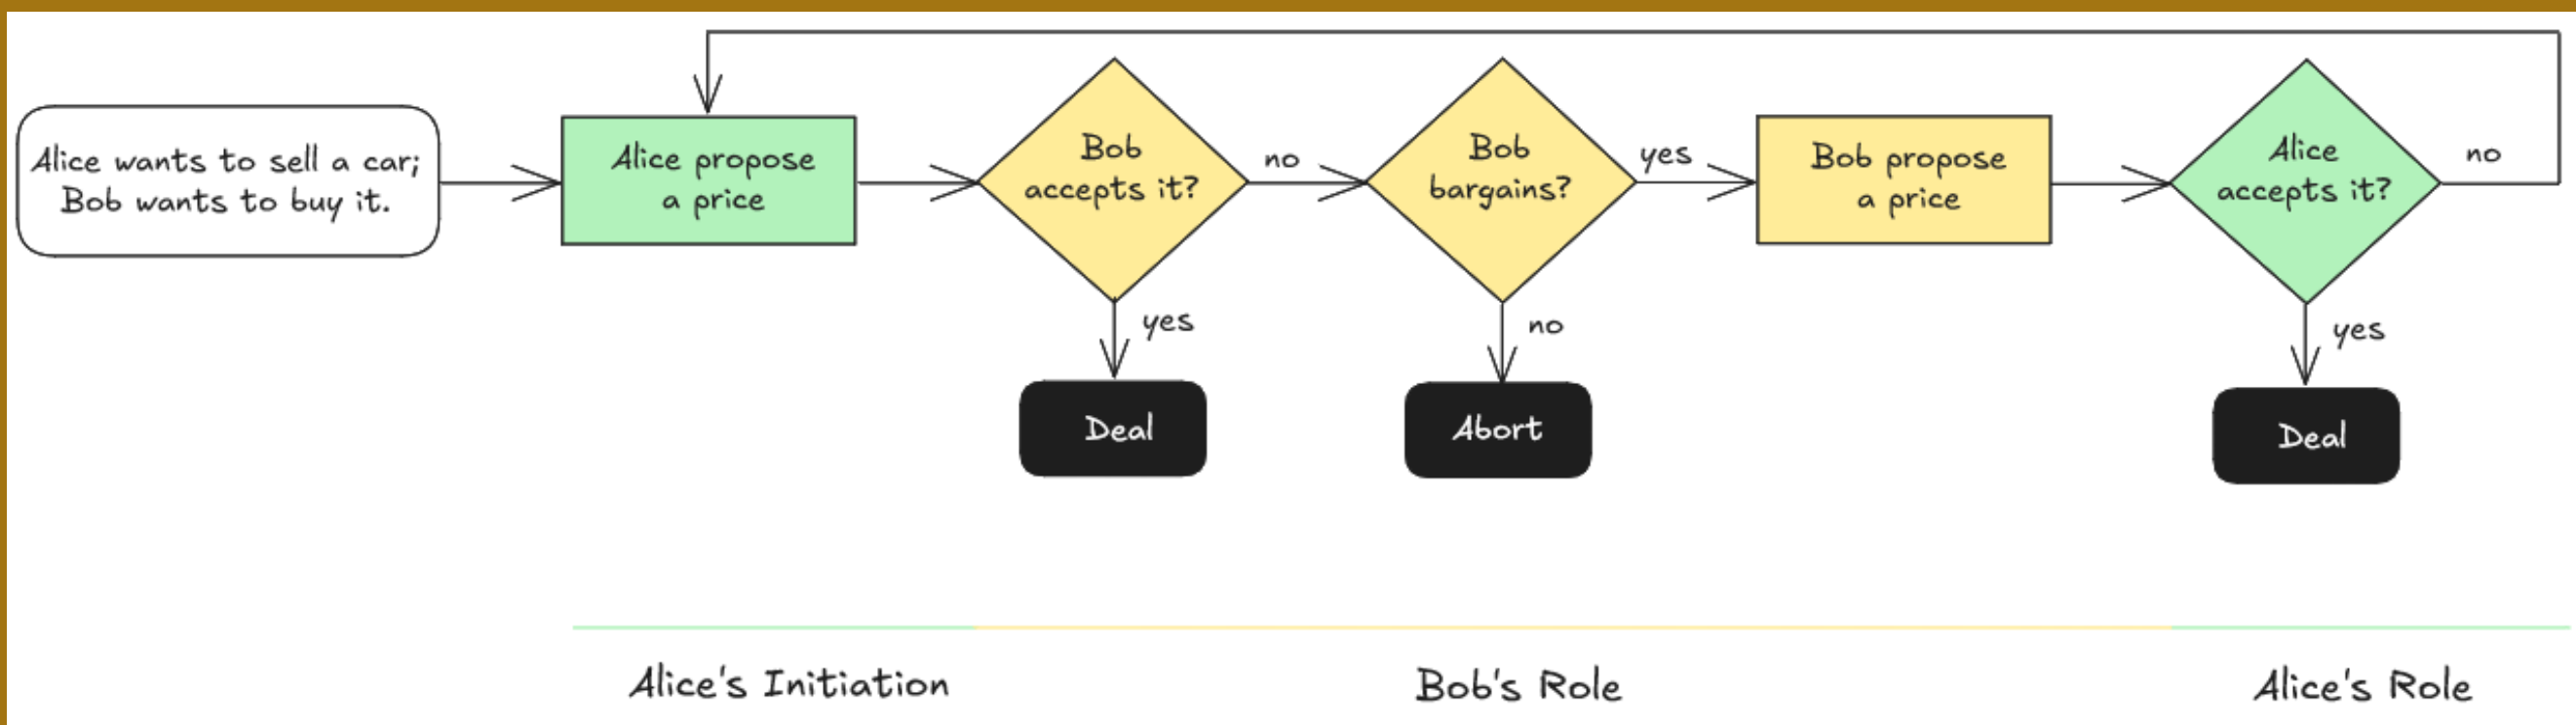

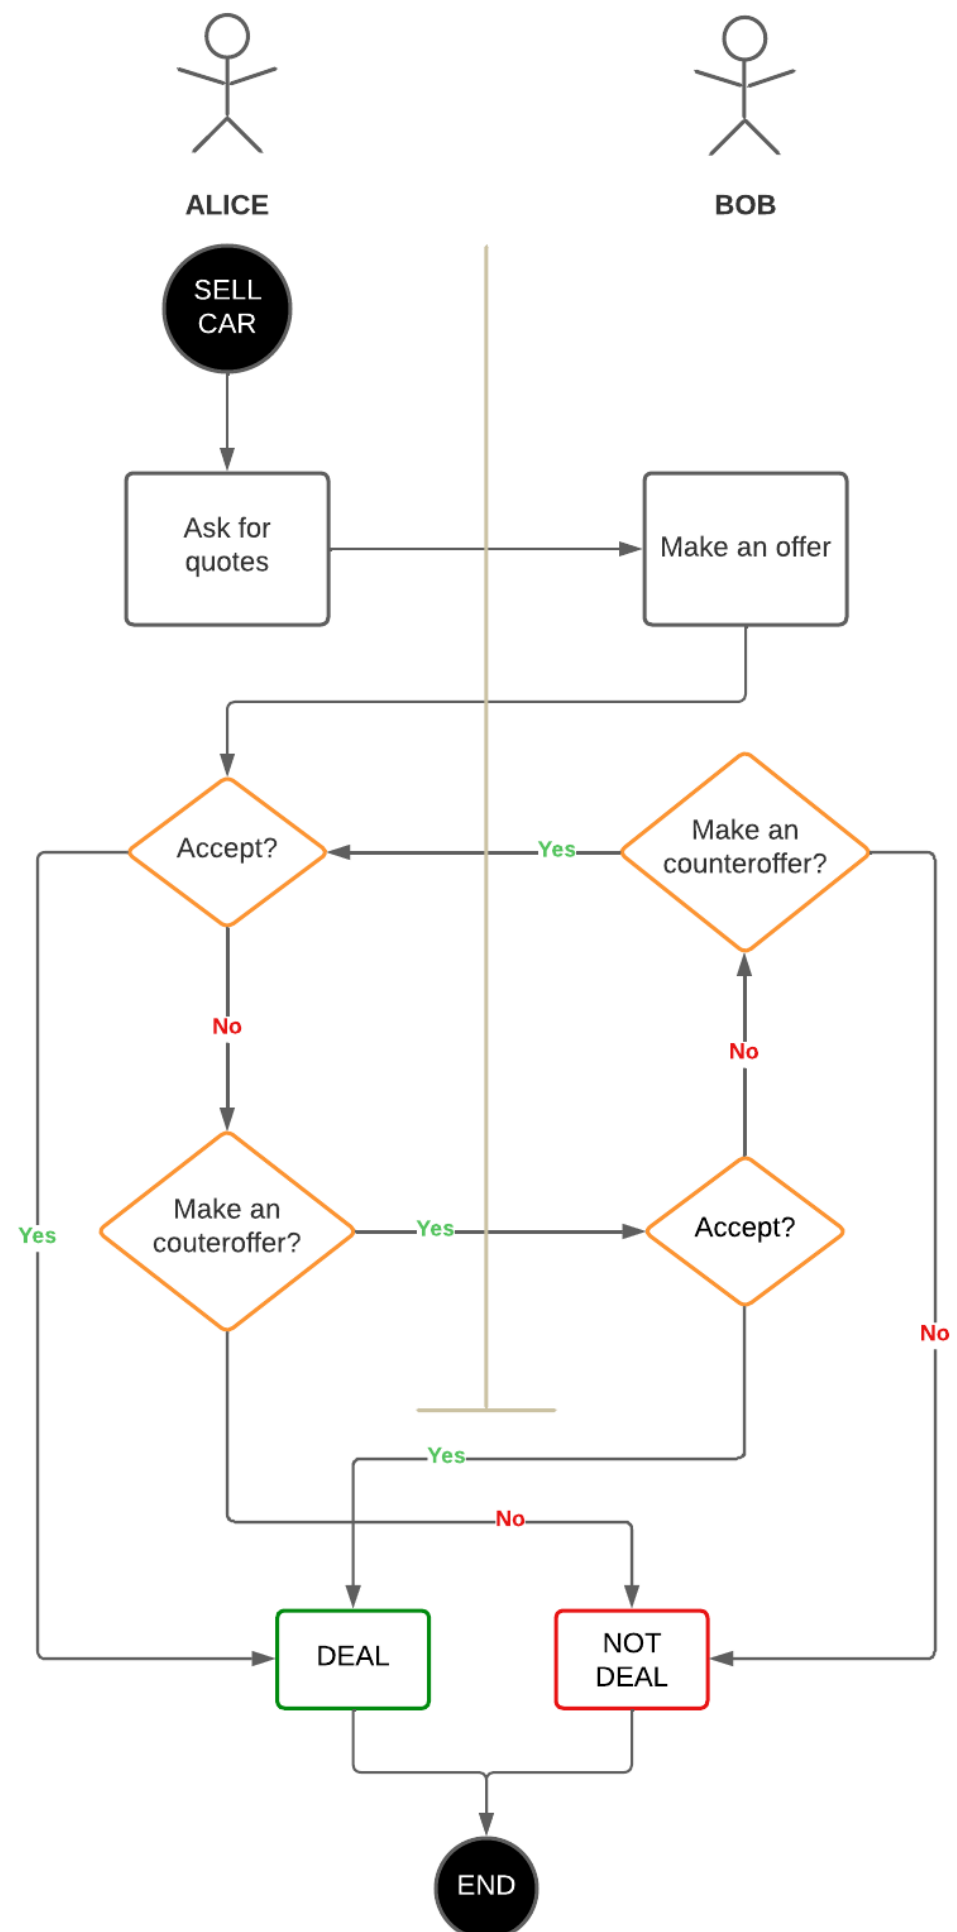


SCENARIO: SELLING A CAR

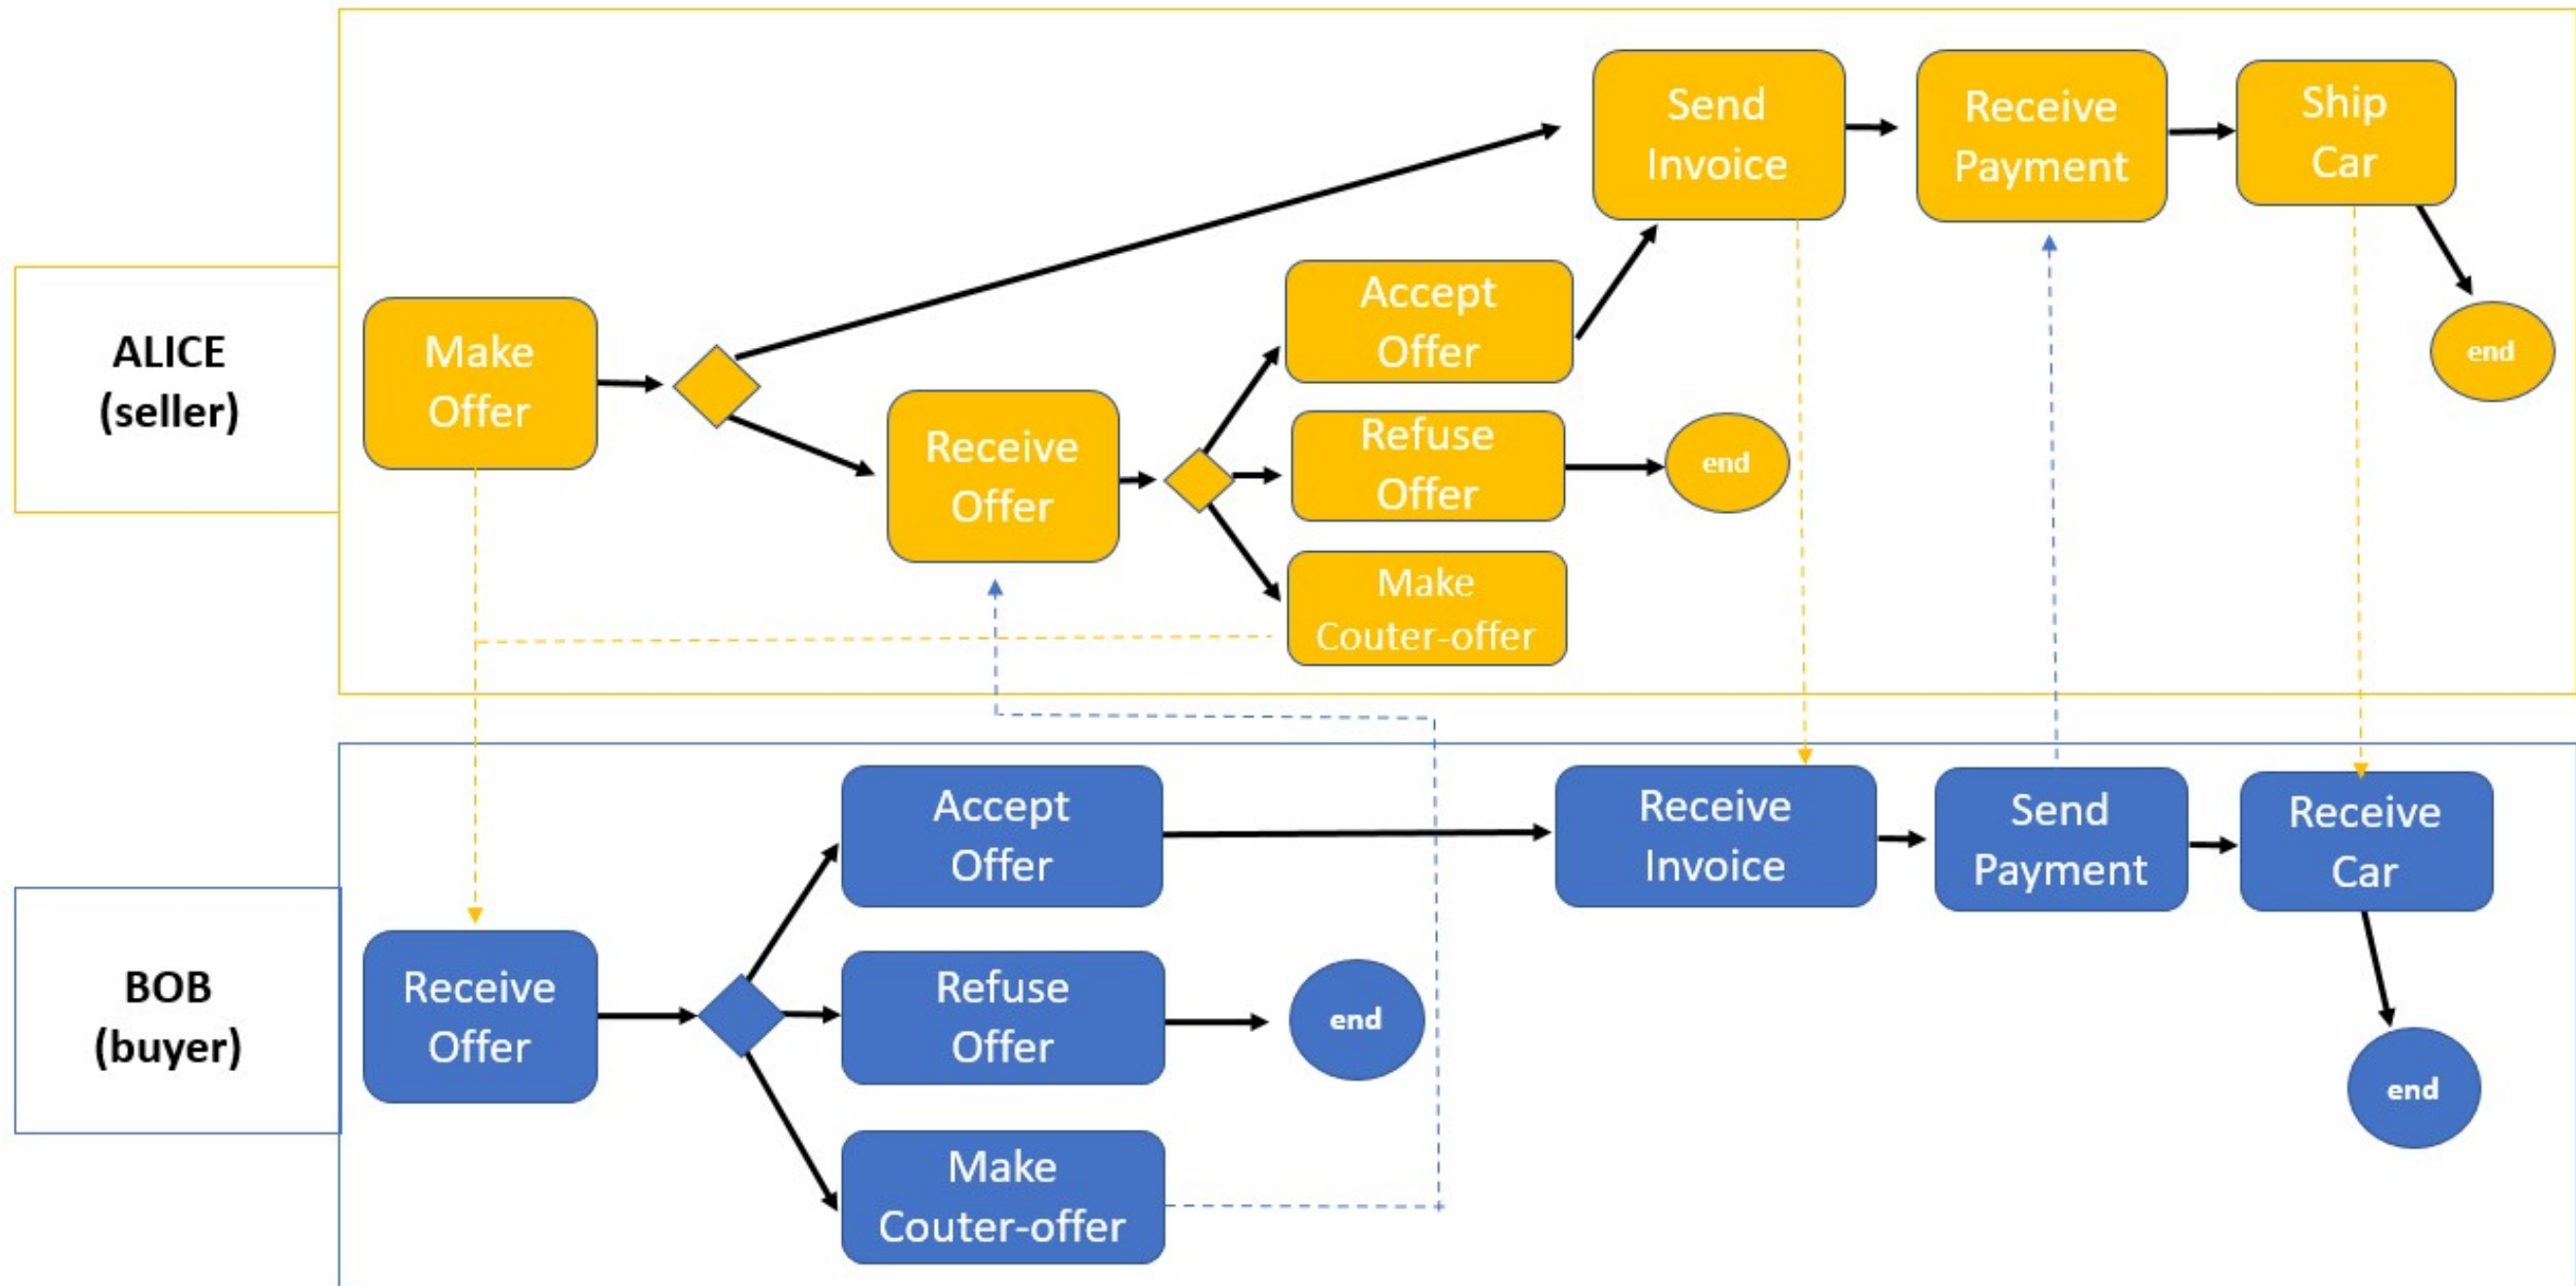


Which lesson?

Let's invent our own notation

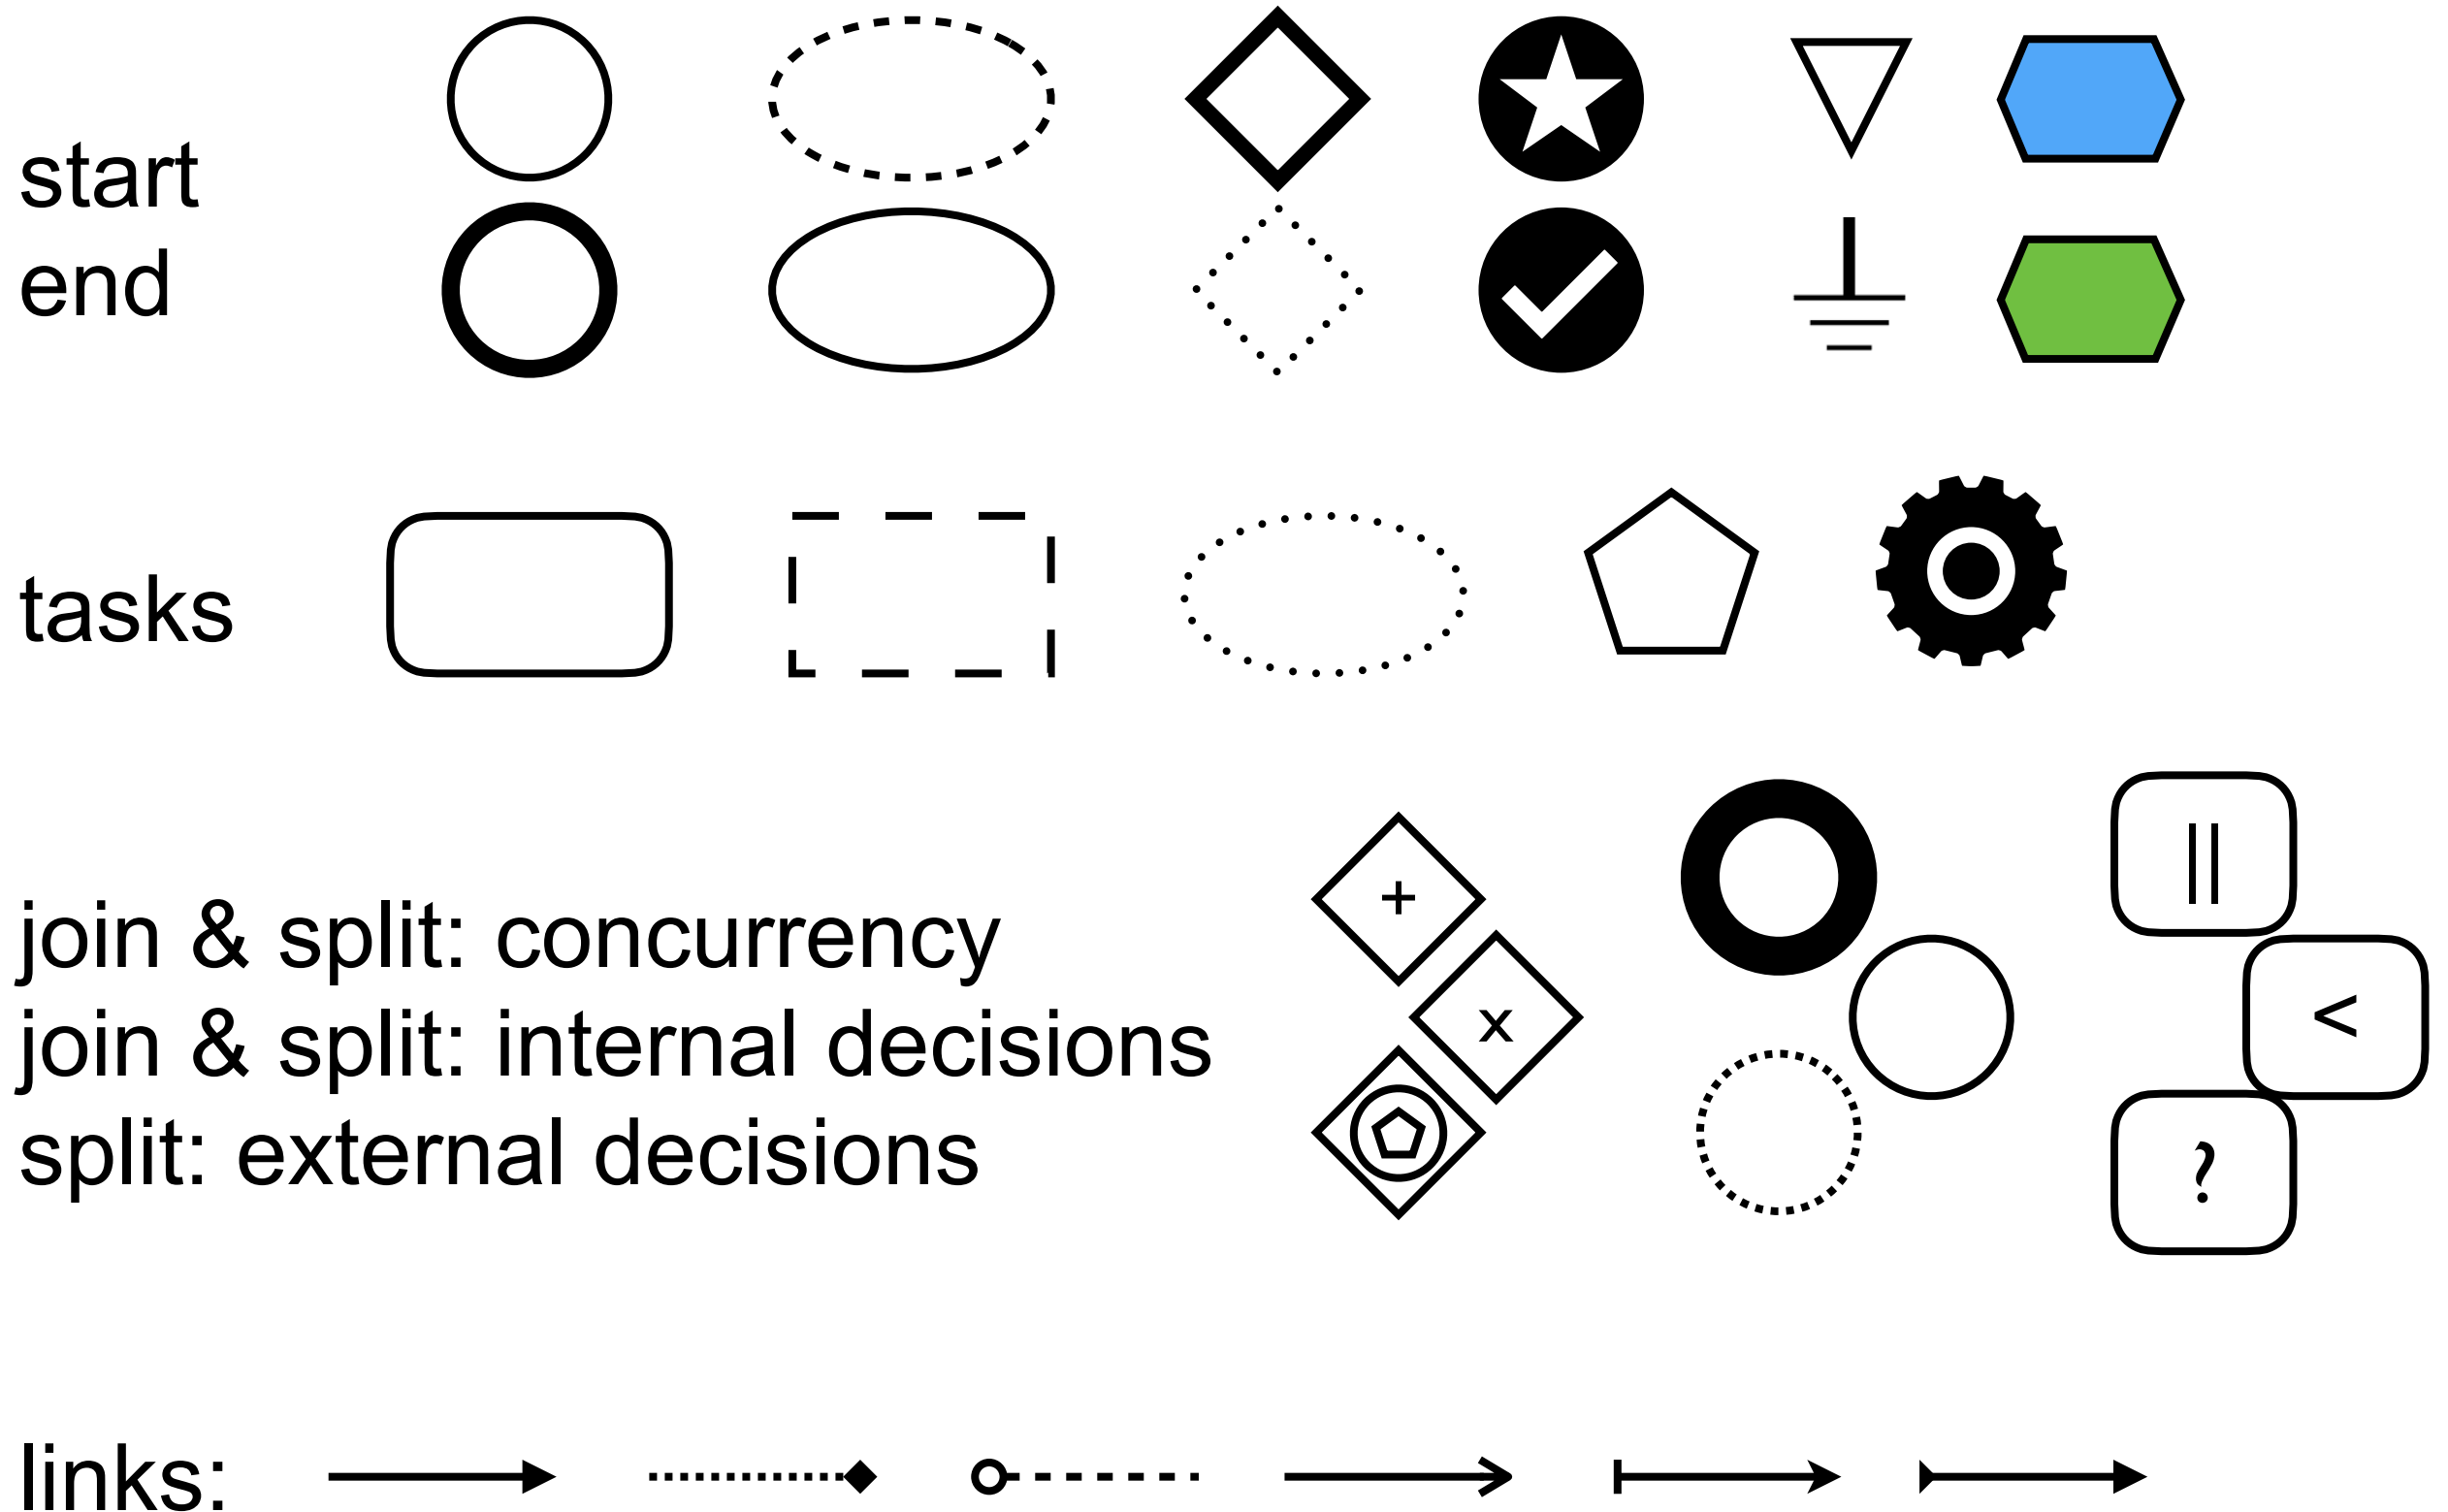


A sneak peek at standards

BPMN, EPC, Workflow nets

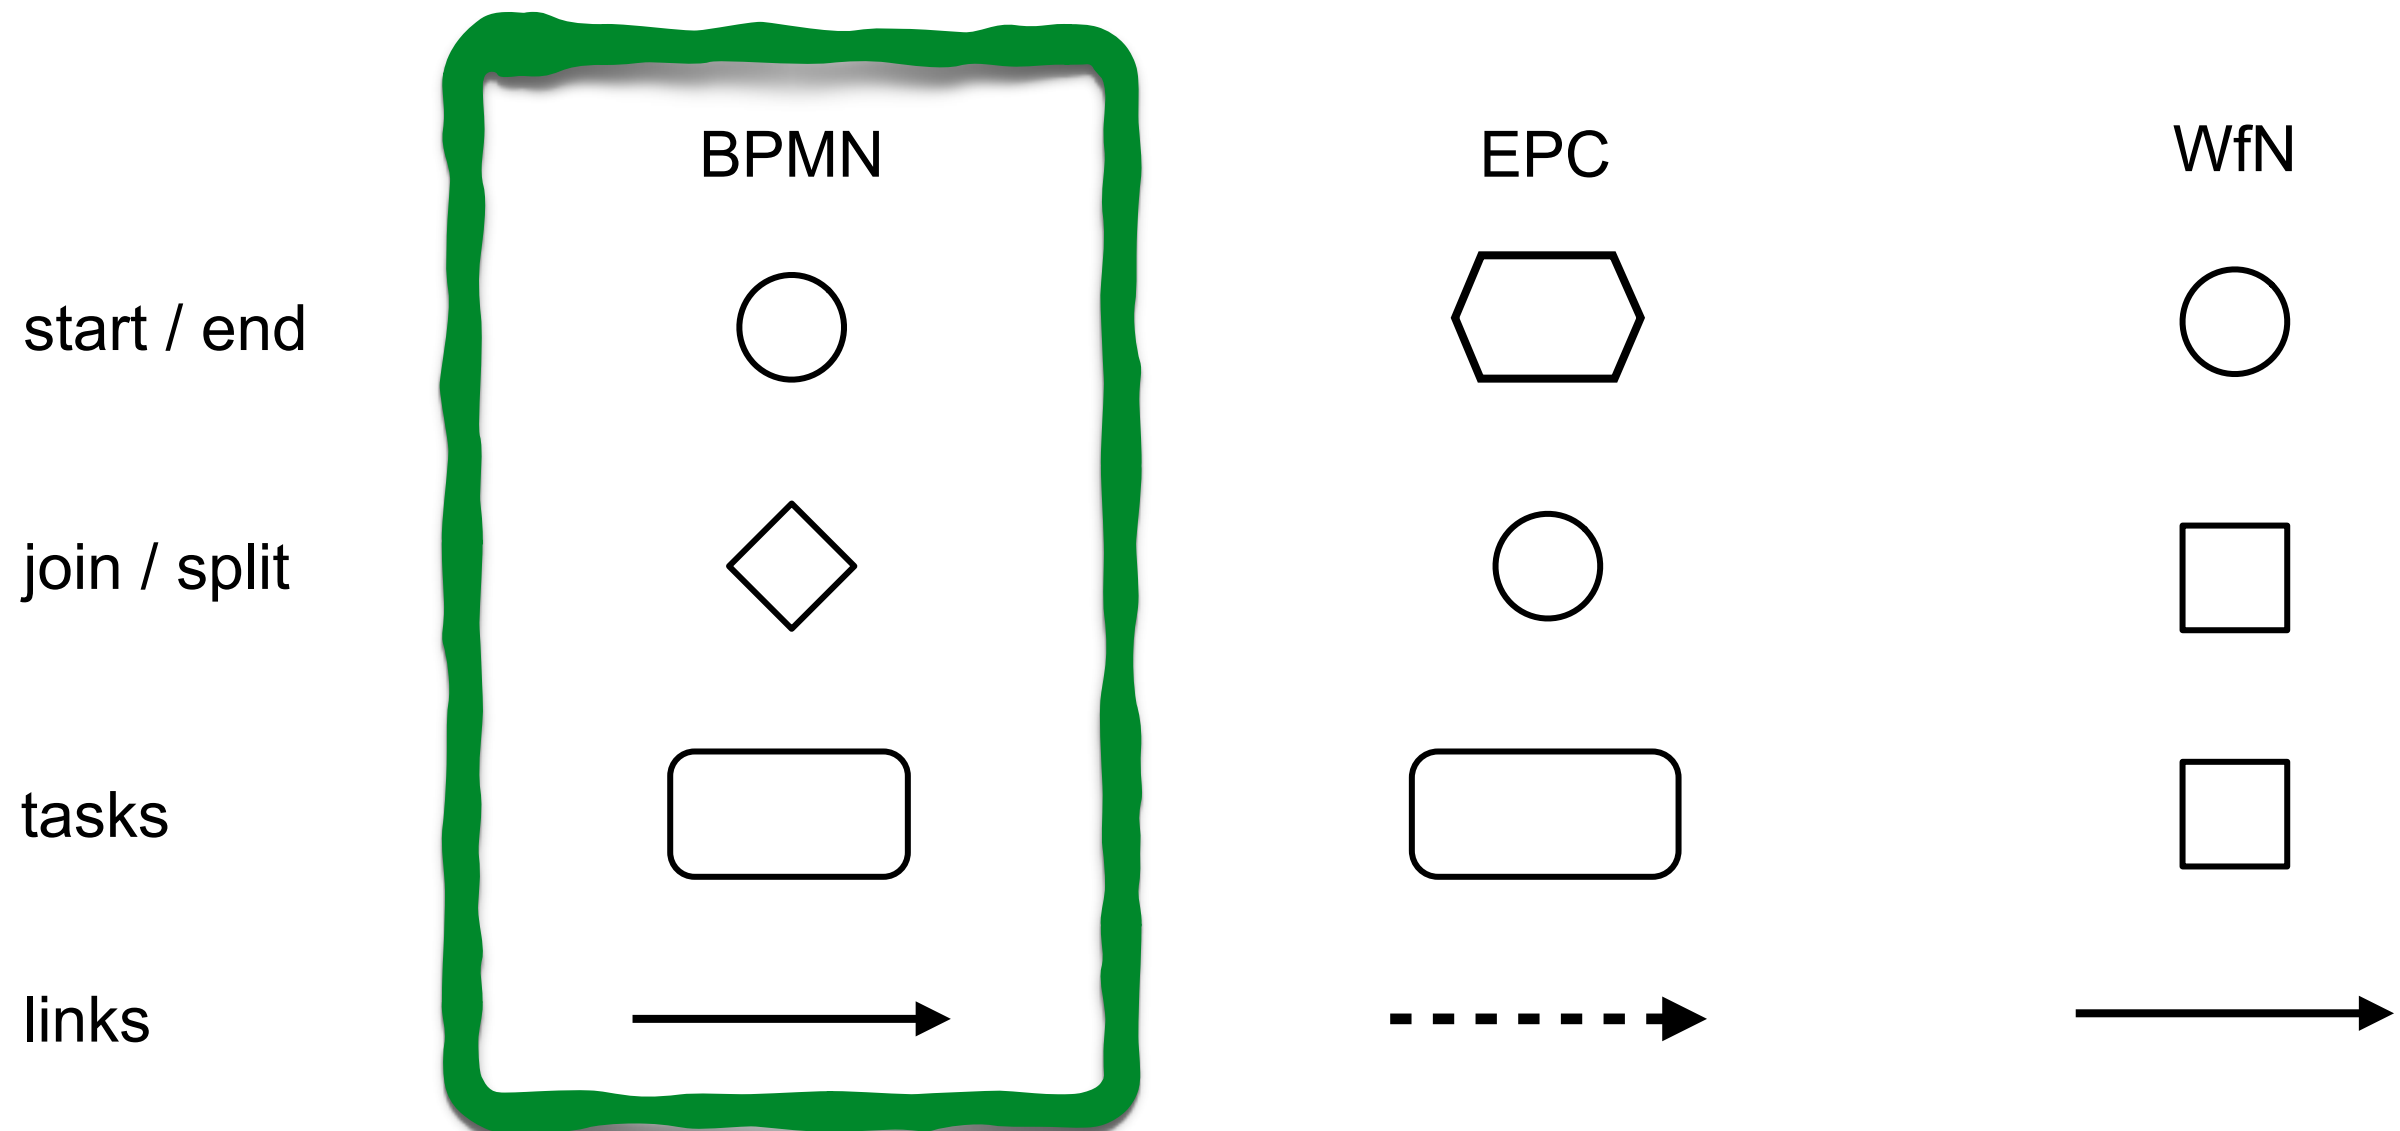

Alice-Bob car selling in BPMN

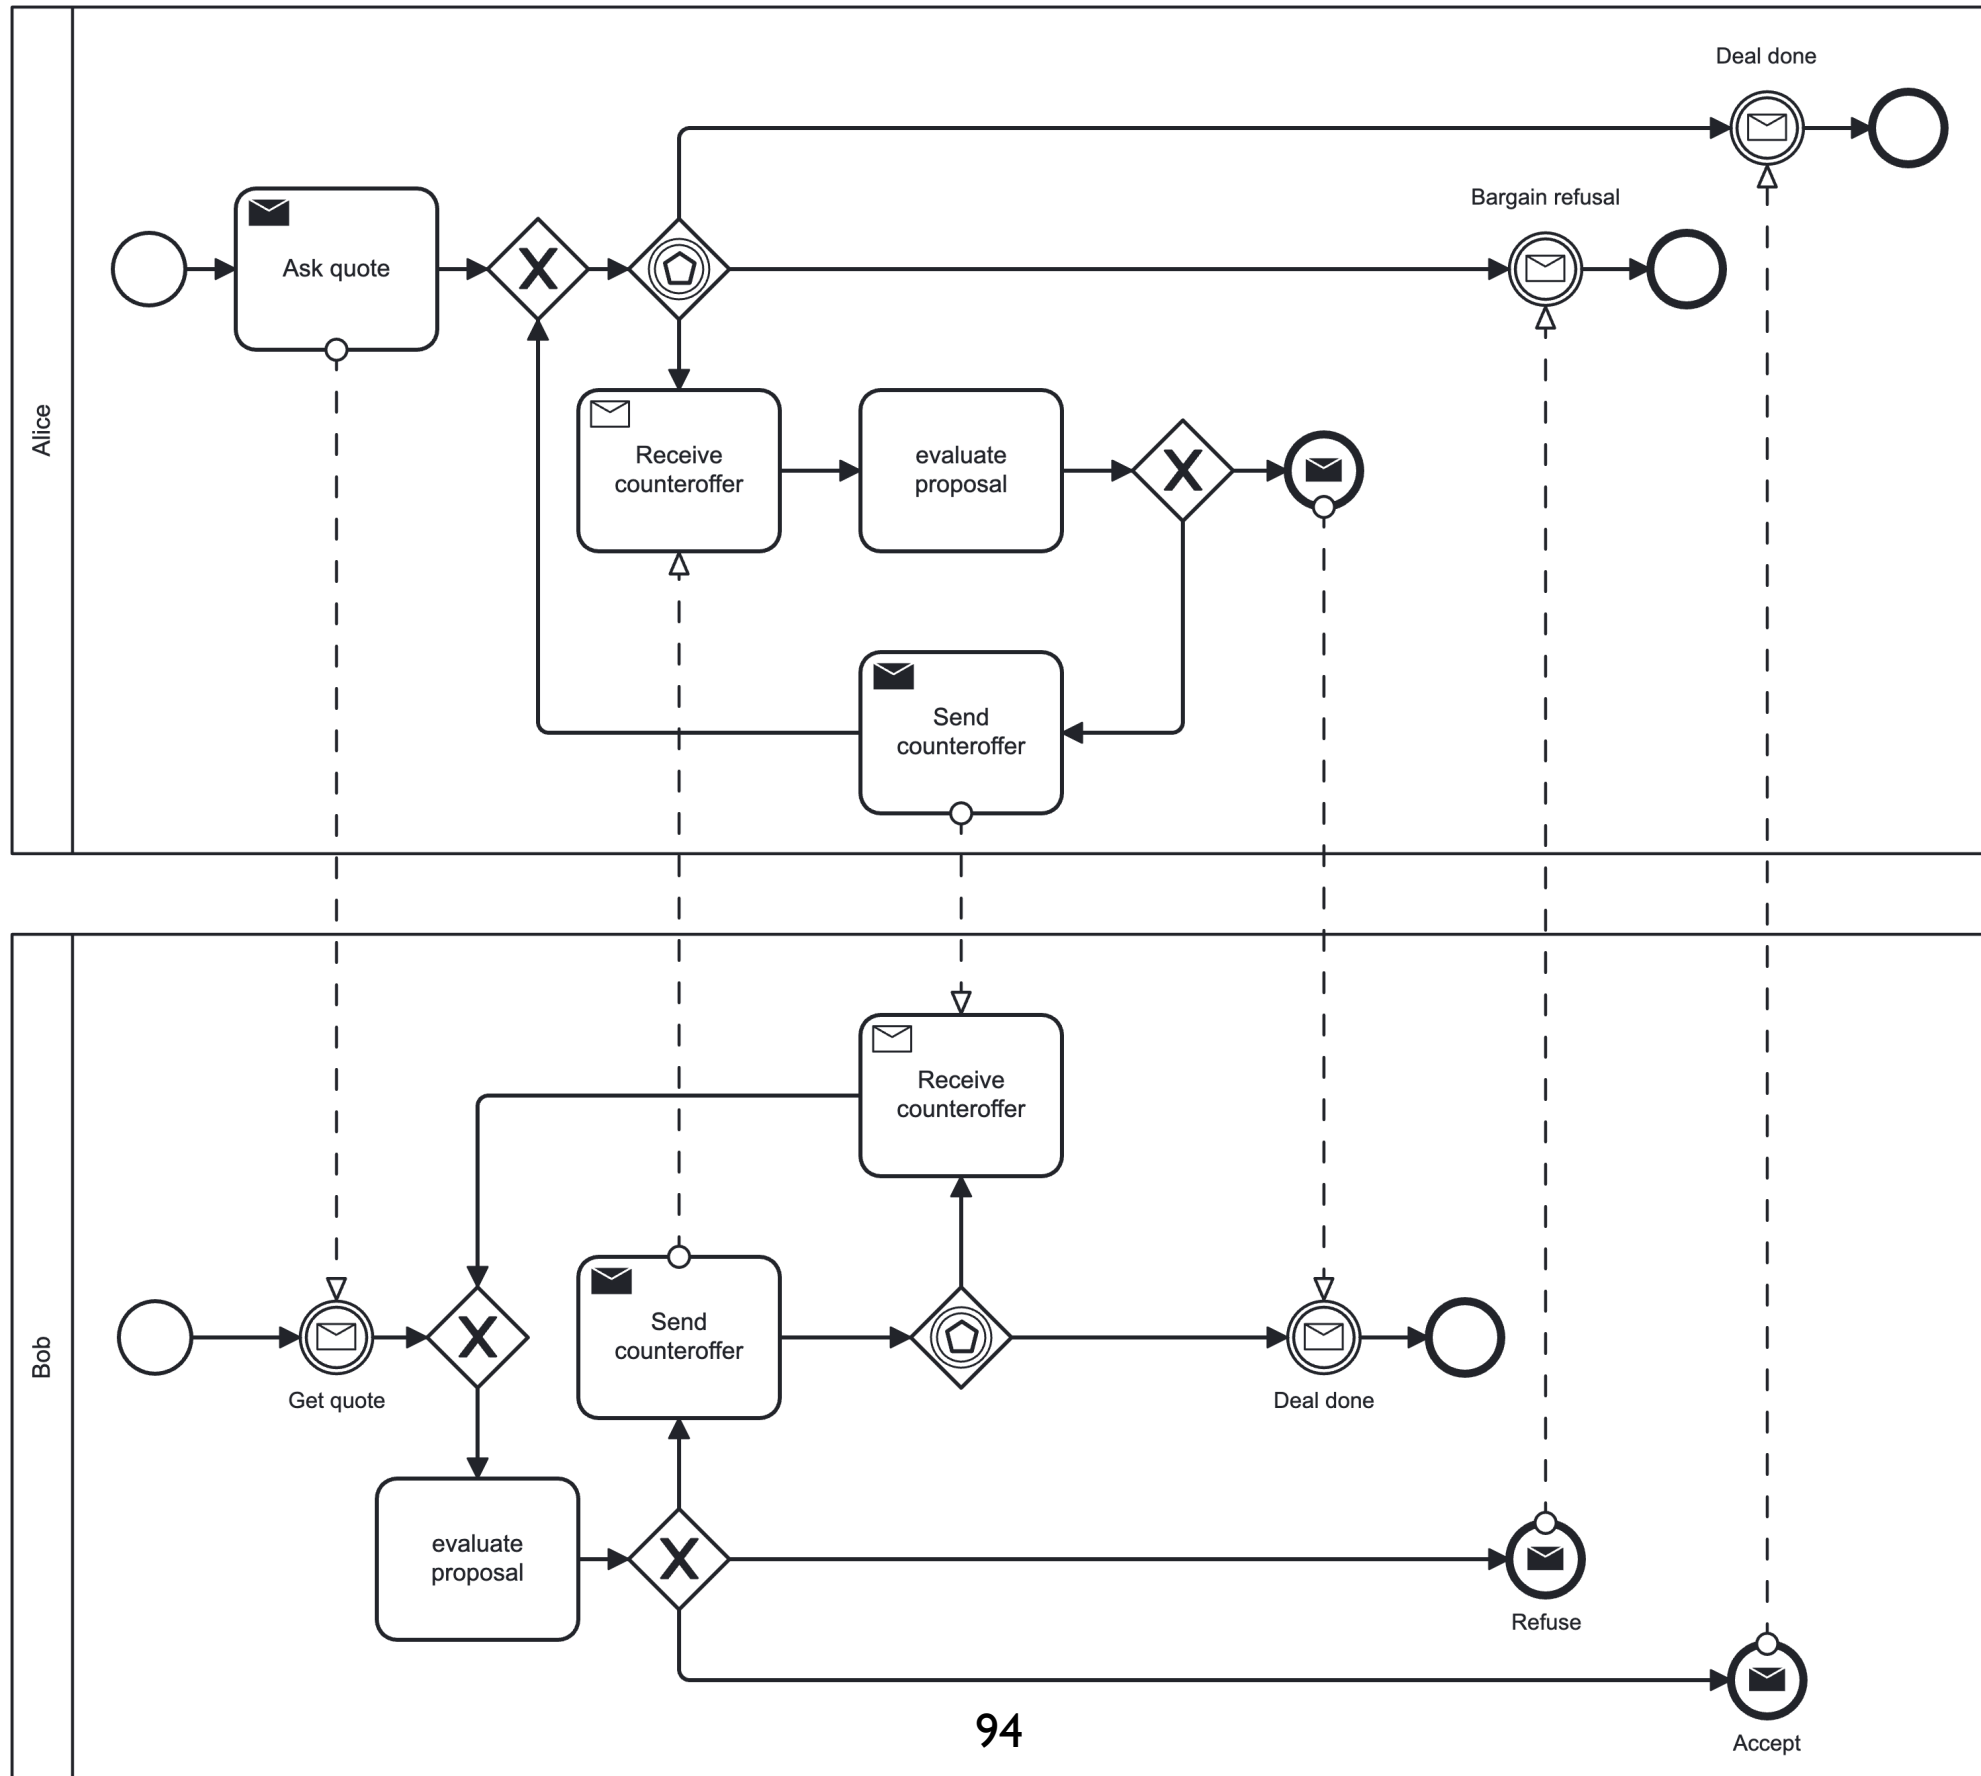

Alice-Bob car selling in BPMN

